



Universal Journal of Electrical and Electronic Engineering

discontinued in Scopus

Country	United States -  SJR Ranking of United States
Subject Area and Category	Engineering Electrical and Electronic Engineering
Publisher	Horizon Research Publishing
Publication type	Journals
ISSN	23323280, 23323299
Coverage	2017, 2019-2020
Scope	Information not localized
	 Join the conversation about this journal

1

H Index

Quartiles

Electrical and Electronic Engineering

2018

2019

SJR


0.1062
0.1056
0.105
0.1044

2018

2019


Total Cites

Self-Cites

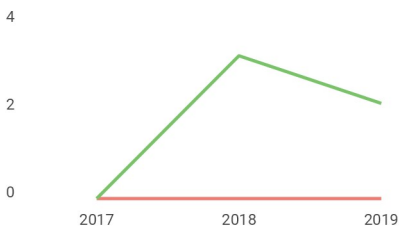


External Cites per Doc

Cites per Doc

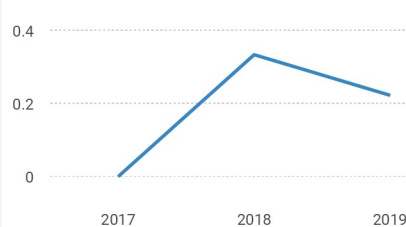


Citations per document

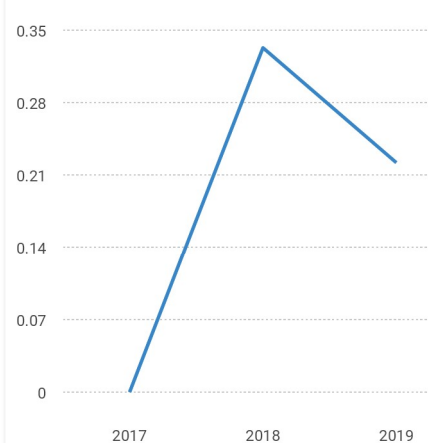


● Cites / Doc. (4 years)
● Cites / Doc. (3 years)
● Cites / Doc. (2 years)

% International Collaboration

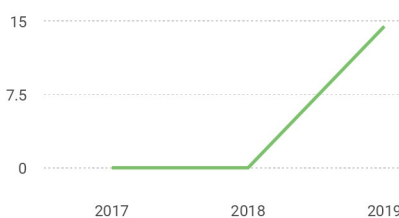


Citable documents

Non-citable documents

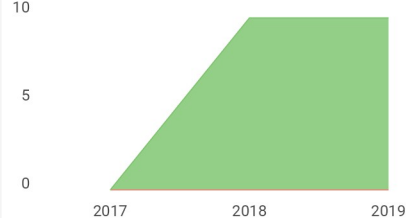

Cited documents

Uncited documents

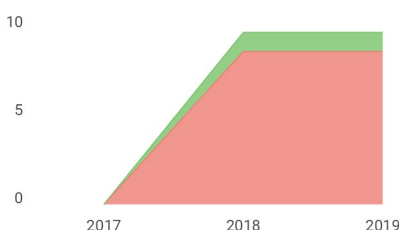Universal Journal of
Electrical and Electronic...

Q4

Electrical and
Electronic
Engineering
best quartile

SJR 2019

0.11

powered by scimagojr.com

← Show this widget in
your own websiteJust copy the code below
and paste within your html
code:`<a href="https://www.scim`



Universal Journal of Electrical and Electronic Engineering

Universal Journal of Electrical and Electronic Engineering is an international peer-reviewed journal that publishes original and high-quality research papers in all areas of electrical and electronic engineering. As an important academic exchange platform, scientists and researchers can know the most up-to-date academic trends and seek valuable primary sources for reference.

ISSN: 2332-3280 (Print)

ISSN: 2332-3299 (Online)

Contact Us: ujeee.editor@hrpub.org or editor@hrpub.org

Website: http://www.hrpublish.org/journals/jour_info.php?id=49

Archive

Volume 7 2020					
Vol.7 No.1	Vol.7 No.2	Vol.7 No.3			
Volume 6 2019					
Vol.6 No.1	Vol.6 No.2	Vol.6 No.2A	Vol.6 No.2B	Vol.6 No.3	Vol.6 No.4
Vol.6 No.5	Vol.6 No.5A	Vol.6 No.5B			
Volume 5 2017					
Vol.5 No.1	Vol.5 No.2	Vol.5 No.3	Vol.5 No.4		
Volume 4 2016					
Vol.4 No.1	Vol.4 No.2	Vol.4 No.3	Vol.4 No.4	Vol.4 No.5	
Volume 3 2015					
Vol.3 No.1	Vol.3 No.2	Vol.3 No.3	Vol.3 No.4	Vol.3 No.5	Vol.3 No.6
Volume 2 2014					
Vol.2 No.1	Vol.2 No.2	Vol.2 No.3	Vol.2 No.4	Vol.2 No.5	Vol.2 No.6
Vol.2 No.7	Vol.2 No.8				
Volume 1 2013					
Vol.1 No.1	Vol.1 No.2	Vol.1 No.3	Vol.1 No.4		

Vol 6(Jul, 2019) No 3

Dynamic Role-based User Service Authority Control and Management on Cloud Computing

Yejin Kwon, Jerry H. Seo, Young Bom Park

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 79 - 93

DOI: 10.13189/ujeee.2019.060301

Conceptual Framework: Rapid Web Application Development by Using Component Reuse and Case Based Reasoning

Eka Angga Laksana, Feri Sulianta

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 94 - 100

DOI: 10.13189/ujeee.2019.060302

Linear Algebra Based Generalization of the Kennelly's Theorem

Ali Krim, Abderrazak Lakrim, Driss Tahri

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 101 - 107

DOI: 10.13189/ujeee.2019.060303

Optimal Placement of a UAV to Prolong the Lifetime of Indoor Wireless Devices



Journals Information

[Aims & Scope](#)

[Indexing](#)

[Editorial Board](#)

[Reviewers](#)

[Guidelines](#)

[Submit Manuscript](#)

[Archive](#)

[Article Processing Charges](#)

[Call for Papers](#)

[Publication Ethics and Malpractice](#)

[Statement](#)

[Copyright](#)

[FAQs](#)

Special Issues Information

[Special Issues Guidelines](#)

Hazim Shakhatreh

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 108 - 114

DOI: 10.13189/ujeee.2019.060304

Design and Performance Improvements in an A6 Relativistic Magnetron Using Particle-in-cell Code

Tusharika S Banerjee, Ayush Saxena, Arti Hadap, K. T. V. Reddy, Apoorva Saxena

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 115 - 128

DOI: 10.13189/ujeee.2019.060305

Enhanced Cluster Stability in Vehicular ad hoc Network

K. V Rop, P. K. Langat, H. A. Ouma

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 129 - 138

DOI: 10.13189/ujeee.2019.060306

Design and Comparison of Vector Quantization Codebooks for Narrowband Speech Coding

Hiba Faraj, Selma Ozaydin

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 139 - 146

DOI: 10.13189/ujeee.2019.060307

Modelling Temperature Effect on (Transverse Electric) TE Mode Shape of Optical Silica Waveguide

Indrawan Arifianto, Muhammad Rangga Hadisiswoyo, Ary Syahriar

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 147 - 150

DOI: 10.13189/ujeee.2019.060308

Simulation of Comparison from NRZ and RZ Pulse in Free Space Optics with Different Weather Conditions

Muhammad Rangga Hadisiswoyo, Octarina Nur Samijayani, Ary Syahriar, Indrawan Arifianto

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 151 - 158

DOI: 10.13189/ujeee.2019.060309

Performance Analysis of Dispersion Compensation Fiber on NRZ and RZ Modulation with Difference Power Transmission

Robi Darwis, Octarina Nur Samijayani, Ary Syahriar, Indrawan Arifianto

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 159 - 166

DOI: 10.13189/ujeee.2019.060310

Performance Analysis of Q Factor Optical Communication in Free Space Optics and Single Mode Fiber

Salim Burdah, Rahmat Alamtaha, Octarina Nur Samijayani, Suci Rahmatia, Ary Syahriar

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 167 - 175

DOI: 10.13189/ujeee.2019.060311

Temperature Effects in Fiber Couplers

Rahmat Alamtaha, Ary Syahriar, Salim Burdah

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 176 - 180

DOI: 10.13189/ujeee.2019.060312

Performance Analysis of Q Factor Optical Communication in Free Space Optics and Single Mode Fiber

Salim Burdah*, Rahmat Alamtaha, Octarina Nur Samijayani, Suci Rahmatia, Ary Syahriar

Department of Electrical Engineering, Faculty of Science and Engineering, Al Azhar University of Indonesia, Indonesia

Copyright©2019 by authors, all rights reserved. Authors agree that this article remains permanently open access under the terms of the Creative Commons Attribution License 4.0 International License

Abstract Developments in the technology sector are currently experiencing rapid progress, especially in data transmission technology. The increasing need for fast data traffic in the telecommunications sector requires technology that can send data quickly. Optical fiber has the speed of receiving and sending data at 2.5 Gbps while FSO has a speed of up to 100 Gbps but this depends on Wavelength, the modulation technique used and the distance of the telescope between the transmitter and receiver. The speed of receiving and sending data also depends on the Quality (Q) of the signal, the greater the value of Quality (Q) of the signal, the better the Quality of the signal. FSO is an optical communication system that uses the atmosphere as its propagation medium and Optical Fiber uses silica as its propagation medium. Therefore, in this paper, a performance analysis of Free Space Optics (FSO) and Single Mode Fiber is carried out based on the Quality Factor and Bit Error Rate (BER) of a signal that is carried out using Optical System simulations with a wavelength of 1310 nm, 1380 nm, 1550 nm, 1550 nm and 1560 nm, with 1 km, 3 km and 5 km, respectively. Then, analysis uses an Eye Diagram to analyze the output signal and compare the Factor Q and Bit Rate Error (BER).

Keywords Free Space Optics, Fiber Optics, Optisystem

1. Introduction

The transmission technique used begins with copper cable networks as a transmission medium on home telephone systems and internet networks. However, because the copper network has a small bandwidth, the latest innovation is being developed, with wireless transmission for connections between networks using radio

frequency namely Free Space Optics (FSO). Free Space Optics (FSO) systems are the latest technology in communication systems that use light beam propagating from a transmitter through empty space to send and receive data [10].

FSO is a technology that uses invisible ray lines to provide optical bandwidth connections that can send and receive data, voice and video communications at high speed [4]. FSO can provide high speed from Point to Point or Point to Multipoint which is difficult to do by Radio over Fiber (ROF) technology such as optical fiber [4]. It was implemented using a laser device that could be installed inside a building or office and basically consisted of an optical transceiver with a laser transmitter and the receiving end to provide full duplex capability [11]. In wireless communication, FSO has many disadvantages such as regulation of bandwidth, high data and power restrictions. However, FSO has the main advantage of the absence of the danger of radio frequency radiation. It does not need to excavate roads as in the case of optical fibers, large bandwidth that allows high data rates and low power consumption [2].

In fiber-optic communication, Single Mode Optical Fiber (SMF) is a deliberate optical fiber to bear light directly down to the stringency of Transverse Mode. Free Space Optics (FSO) communication means that transmission modulates visible or infrared light throughout the atmosphere to obtain optical communication [9]. Another important advantage of the FSO is that it is not touched by electromagnetic interference and radio frequency interference from other unwanted signals. However, the propagation of optical waves through the air experiences amplitude and phase fluctuations due to atmospheric turbulence, also known as scintillation and remains in bright weather conditions [5]. The application of FSO systems is used in disaster recovery and for a while temporary connectivity of cable networks is deployed.

2. Theoretical Foundation

2.1. Free Space Optics

Free space optic is a wireless line of sight (LOS) network that uses light beams that refer to lasers on optical networks. This component models a free space optics (FSO) channel. It is a subsystem of two telescopes and the free space channel between them. It is best suited for the modeling of line of sight free space terrestrial links. FSOs can work at hundreds of meters to several kilometers [10]. Free space optical communication (FSO) or often called optical wireless can carry full-duplex data at gigabit per second at metropolitan distances from several cities blocks up to several kilometers. One implementation that gets attention is Li-fi or light fidelity, which has the same Wi-Fi function but uses visible light communication (VLC), so it has a higher speed [1]. Another implementation developed is for inter-point communication in networks that use various media such as smart city or Internet of Thing (IoT). Free Space Optic (FSO) technology is applied to buildings to buildings, cities to cities can even be island to island. The wavelength used in this paper is 1310 nm, 1380 nm, 1550 nm and 1560 nm.

2.2. Fiber Optics

Optical Fiber is a suggestion made from strands of thin glasses that can produce a communication system in the form of light waves. Light is used to carry and transmit information or data, both analog and digital. The working system of optical fibers is light released into the fiber which consists of two layers, namely the core and the outside. Light will run along the fiber through a series of reflections that occur where the core and the outside meet. Then the light will be picked up by the light sensitive receiver then the original signal will be produced. Many optical fibers have now been used to transmit data and are installed underground.

2.3. Bit Error Rate (BER)

This visualizer allows the user to calculate and display the bit error rate (BER) of an electrical signal automatically. It can estimate the BER using different algorithms such as Gaussian and Chi-Squared and derive different metrics from the eye diagram, such as Q Factor, eye opening, eye closure, extinction ratio, eye height, jitter, etc. It can also take in account Forward Error Correction (FEC), plot BER patterns and estimate system penalties and margins. BER (bit error rate) is a measure of signal Quality received for digital data transmission systems. The FSO system BER The parameter Algorithm defines the numerical method to use for the BER estimation. Assuming Gaussian noise with the standard deviations σ_0 and σ_1 , the BER is [13]:

$$P_e = \frac{M}{N+M} P_{e0} + \frac{N}{M+N} P_{e1} \quad (1)$$

where P_0 and P_1 are the probabilities of the symbols, M is the number of samples for the logical 0, and N is the number of samples for the logical 1. Also, P_{e0} and P_{e1} are:

$$P_{e0} = \frac{1}{2} \operatorname{erfc}\left(\frac{S-\mu_0}{\sqrt{2}\sigma_0}\right) \quad (2)$$

$$P_{e1} = \frac{1}{2} \operatorname{erfc}\left(\frac{\mu_0-S}{\sqrt{2}\sigma_1}\right) \quad (3)$$

where μ_0 , μ_1 , σ_0 and σ_1 are average values and standard deviations of the sampled values respectively, and S is the threshold value.

An enhancement of the simple Gaussian approximation can be achieved by averaging the separately estimated BERs for different sampled symbols [8]. For M sampled values for the logical 0 and N sampled values for the logical 1, the corresponding error rates are:

$$P_{e1} = \frac{1}{2N} \sum_{i=1}^N \operatorname{erfc}\left(\frac{\mu_{01i}-S}{\sqrt{2}\sigma_{1i}}\right) \quad (4)$$

$$P_{e0} = \frac{1}{2M} \sum_{i=1}^M \operatorname{erfc}\left(\frac{\mu_0-S}{\sqrt{2}\sigma_{0i}}\right) \quad (5)$$

If the signal is mixed with the noise, the Average Gaussian method is modified to calculate the average error patterns. The detailed description is [3]:

$$P_e = \sum_{i=1}^8 \frac{NP}{M} \operatorname{erfc}\left(\frac{\mu_i-S}{\sqrt{2}\sigma_i}\right) \quad (6)$$

where NP is the number of one occurrence of any pattern, N is the total number of patterns, and are average values and standard deviations of the sampled values for each pattern respectively, and S is the threshold value.

2.4. Signal to Noise Ratio

Noise on a wireless optical system can be divided into two major parts, namely shot noise and thermal noise. SNR values on the FSO system [6] are as follows:

$$\operatorname{SNR}_{\text{FSO}} = \frac{S}{N} \quad (7)$$

S is an input signal in the form of a receiver at $\lambda = 1550$ nm, and B is bandwidth (Hz) while N is a noise that can be caused by atmospheric turbulence, temperature and so on.

2.5. Q Factor

The Quality Factor is a measure of how noisy a pulse is for diagnostic purposes. The eye pattern oscilloscope will typically generate a report that shows what the Q Factor number is. The Q-Factor suggests the minimum signal-to-noise ratio (SNR) required to obtain a specific BER for a given signal. OSNR is measured in decibels. The higher the bit rate, the higher the OSNR ratio required [7].

Q Factor is a key parameter that determines the performance of a communication channel. Q Factor represents SNR optical for binary / digital optical communication and facilitates system performance analysis [5].

There are two modes to calculate the Q Factor:

The Q Factor from BER is calculated numerically by:

$$P_e = \frac{1}{2} \operatorname{erfc}\left(\frac{Q}{\sqrt{2}}\right) \quad (8)$$

where the Q Factor is calculated:

$$Q = \frac{|\mu_1 - \mu_0|}{\sigma_1 - \sigma_0} \quad (9)$$

3. Model Design

3.1. Design Free Space Optics and Fiber Optics

Transmission performance analysis of two different channel in optical communication systems. This system is

designed using optical simulation software Optisystem. OptiSystem software can be used to model and simulate optical fibre systems and FSO optical free space systems provides a user interface that is commonly used for many other electrical engineering tools especially optics.

Single mode fiber is designed as shown in Fig.1 with a wavelength of 1310 nm, 1380 nm, 1550 nm and 1560 nm with 1 km, 3 km and 5 km respectively and then SMF using Low Pass Gaussian Filter.

Free Space Optics is designed as shown in Fig.2 with a wavelength of 1310 nm, 1380 nm, 1550 nm and 1560 nm with 1 km, 3 km and 5 km respectively and then FSO using Low Pass Filter.

Then the SMF and FSO design will display the results of Q Factor and BER.

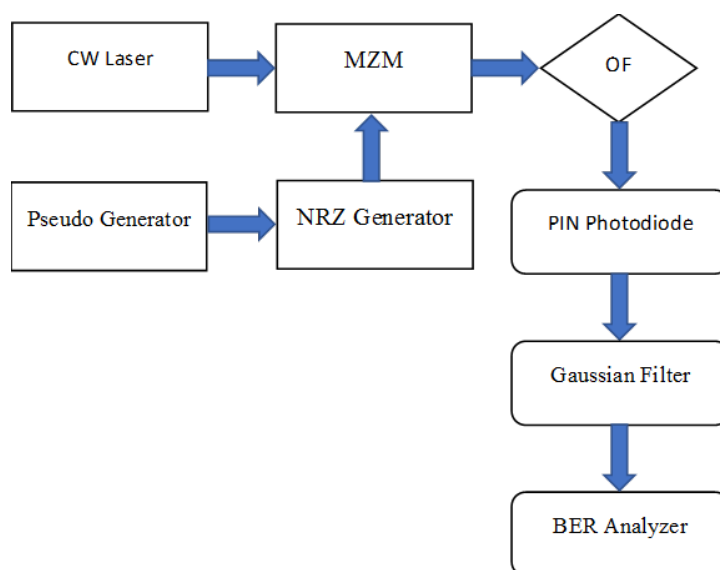


Figure 1. Design Optical Communication System

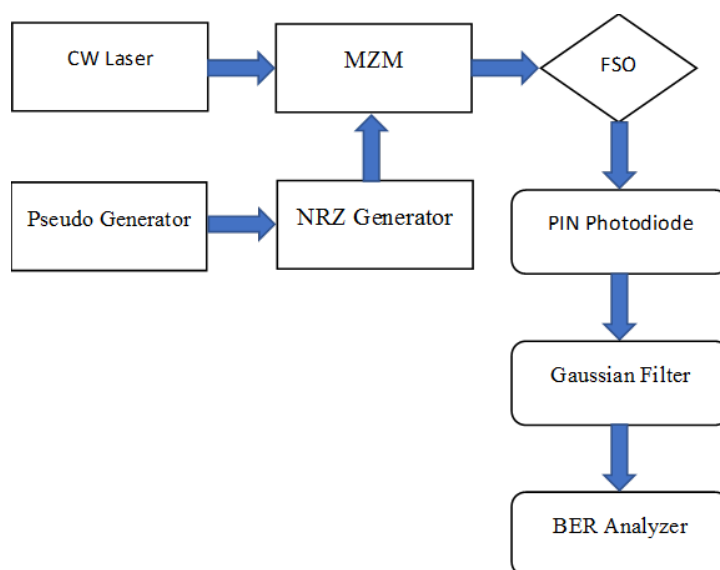


Figure 2. Design 3.2. Free Space Optics (FSO)

3.2. System Design

Table 1. FSO Communication System Design Specification

Design Parameter	Value
Attenuation	0.2 db/km
Wavelength	1310 nm, 1380 nm, 1550 nm and 1560 nm
Link Range	1 km, 3 km, and 5 km

Table 2. SMF Communication System Design Specification

Design Parameter	Value
Attenuation	0.2 db/km
Wavelength	1310 nm, 1380 nm, 1550 nm and 1560 nm
Link Range	1 km, 3 km, and 5 km

4. Result and Discussion

4.1. Result of Q Factor, BER, Power Receiver in Fiber Optics

In previous studies conducted by Pinky Vishwakarma and Jayprakash Vijay entitled “Comparative Analysis of Free Space Optics and Single Mode Fiber” with range 1 km, 50 km, 100 km and using wavelength 750 nm, 1350 nm, and 1550 nm [14].

The following are the results of SMF simulations that have been carried out with wavelengths of 1310 nm, 1380 nm, 1550 nm and 1560 nm with distances of 1 km, 3 km and 5 km respectively, and then produce the amount of Q Factor and Bit Rate Error.

4.2. Result of Q Factor, BER, Power Receiver in Free Space Optics

In previous studies conducted by Pinky Vishwakarma and Jayprakash Vijay entitled “Comparative Analysis of Free Space Optics and Single Mode Fiber”, it used optical wireless communication (OWC) channel components. It is a subsystem of two telescopes and the wireless communication channel between them. It is best suited for the modeling of satellites and earth-satellite links with range 1 km, 50 km, 100 km and then using wavelength 750 nm, 1350 nm, and 1550 nm [14]. While in this paper the FSO channel is used for buildings to buildings.

The following are the results of FSO simulations that

have been carried out with wavelengths of 1310 nm, 1380 nm, 1550 nm and 1560 nm with distances of 1 km, 3 km and 5 km respectively and then produce the amount of Q Factor, bit rate error and power receiver. As a Quality Factor, Q is a one important indicator to determine optical performance which is used to characterize BER.

4.3. Comparison of Q Factor in Fiber Optics and Free Space Optics

Figure 3 (a) and (b) are the results of Q Factor graph FSO and SMF simulation at wavelengths of 1310 nm, 1380 nm, 1550 nm, and 1560 nm in the range of 1 km. In FSO communication at a wavelength of 1310 nm with a distance of 1 km it produces a Q Factor of 18.0961, and BER 9.88904E-74. At wavelength 1380 nm with distance of 1 km it produces a Q Factor of 21.2292, and BER 1.15343E-100. At wavelength 1550 nm with distance of 1 km it produces a Q Factor of 19.9462, and BER 4.6897E-89. At wavelength 1560 nm with distance of 1 km it produces a Q Factor of 20.0208, and BER 9.64973E-90.


In SMF communication at a wavelength of 1310 nm with a distance of 1 km it produces a Q Factor of 165.486, and BER 0. At wavelength 1380 nm with distance of 1 km it produces a Q Factor of 172.538, and BER 0. At wavelength 1550 nm with distance of 1 km it produces a Q Factor of 165.872, and BER 0. At wavelength 1560 nm with distance of 1 km it produces a Q Factor of 156.234, and BER 0.

Table 3. SMF Communication Result Q Factor, and BER

Range		1310 nm	1380 nm	1550 nm	1560 nm
1 km	Q Factor	165.486	172.538	165.872	156.234
	Bit Error Rate	0	0	0	0
3 km	Q Factor	74.3013	78.943	126.472	127.408
	Bit Error Rate	0	0	0	0
5 km	Q Factor	41.1173	45.6312	74.2918	70.2528
	Bit Error Rate	0	0	0	0

Table 4. FSO Communication Result Q Factor, and BER

Range		1310 nm	1380 nm	1550 nm	1560 nm
1 km	Q Factor	18.0961	21.2292	19.9462	20.0208
	Bit Error Rate	9.89E-74	1.15E-100	4.69E-89	9.65E-90
3 km	Q Factor	8.28732	6.67494	8.00419	9.67081
	Bit Error Rate	2.94E-17	7.E-12	4.E-16	1.12E-22
5 km	Q Factor	5.72717	5.79216	6.43775	5.72773
	Bit Error Rate	2.76E-09	2.31E-09	3.48E-11	3.03E-09

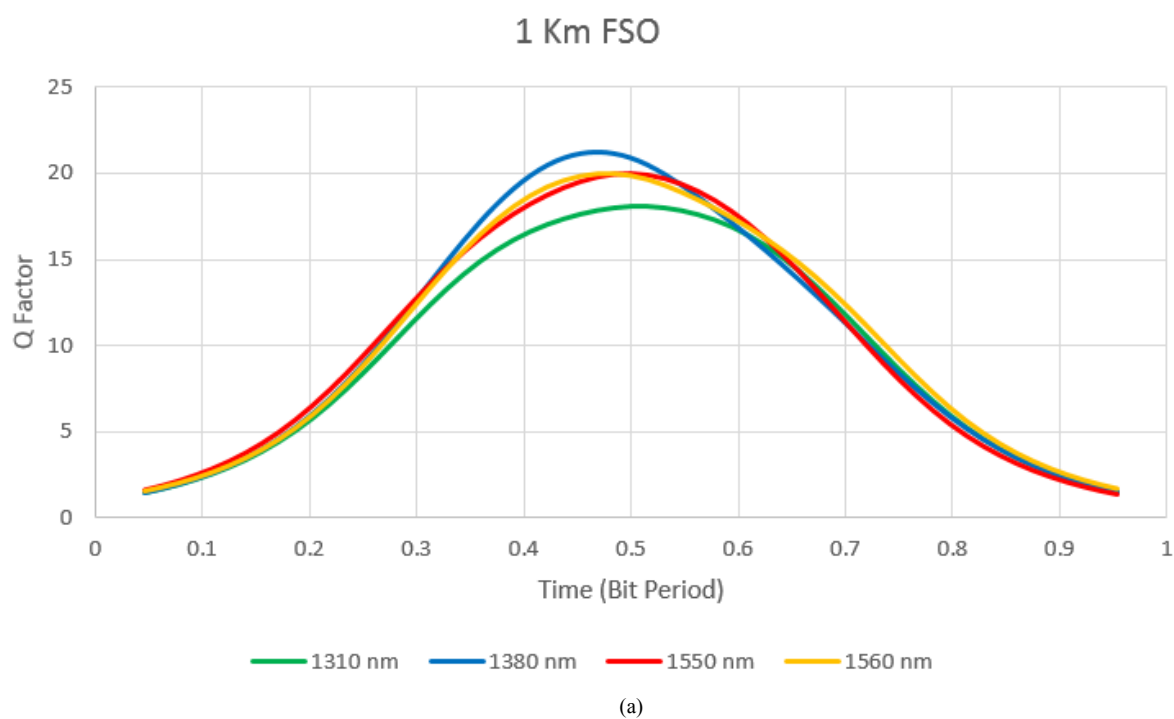

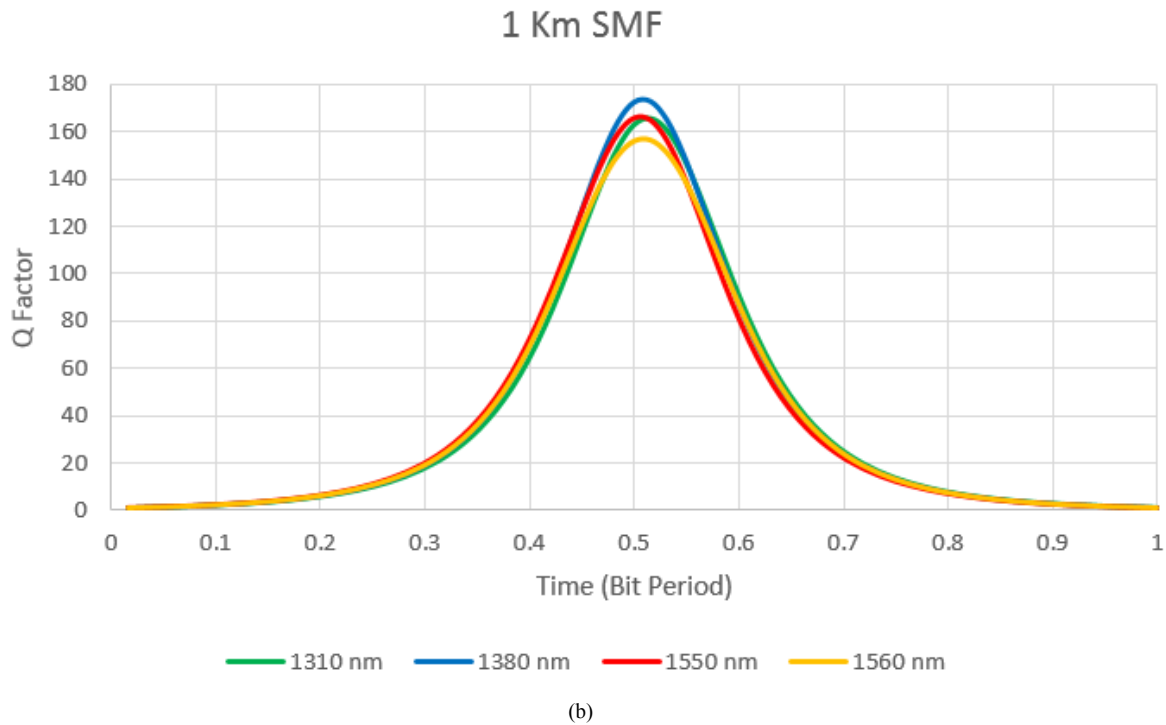


Figure 3. (a) Graph Q Factor FSO with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 1 km. (b) Graph Q Factor SMF with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 1 km

Figure 4 (a) and (b) are the results of Q Factor graph FSO and SMF simulation at wavelengths of 1310 nm, 1380 nm, 1550 nm, and 1560 nm in the range of 3 km. In FSO communication at a wavelength of 1310 nm with a distance of 3 km it produces a Q Factor of 8.28732, and BER $2.94185\text{E-}17$. At wavelength 1380 nm with distance of 3 km it produces a Q Factor of 6.67494, and BER $7\text{E-}5$. At wavelength 1550 nm with distance of 3 km it produces a Q Factor of 8.00419, and BER $4\text{E-}16$. At wavelength 1560 nm with distance of 3 km it produces a Q Factor of 9.67081, and BER $1.11774\text{E-}22$.

In SMF communication at a wavelength of 1310 nm with a distance of 3 km it produces a Q Factor of 74.3013, and BER 0. At wavelength 1380 nm with distance of 3 km it produces a Q Factor of 78.943, and BER 0. At wavelength 1550 nm with distance of 3 km it produces a Q Factor of 56.472, and BER 0. At wavelength 1560 nm with distance of 3 km it produces a Q Factor of 57.408, and BER 0.

Figure 5 (a) and (b) are the results of Q Factor graph FSO and SMF simulation at wavelengths of 1310 nm, 1380 nm, 1550 nm, and 1560 nm in the range of 5 km. In FSO communication at a wavelength of 1310 nm with a distance of 5 km it produces a Q Factor of 5.72717, and BER $2.76\text{E-}09$. At wavelength 1380 nm with distance of 5 km it

produces a Q Factor of 5.79216, and BER $2.31\text{E-}09$. At wavelength 1550 nm with distance of 5 km it produces a Q Factor of 6.43775, and BER $3.48\text{E-}11$. At wavelength 1560 nm with distance of 5 km it produces a Q Factor of 5.72773, and BER $3.03\text{E-}09$.

In SMF communication at a wavelength of 1310 nm with a distance of 5 km it produces a Q Factor of 41.1173, and BER 0. At wavelength 1380 nm with distance of 5 km it produces a Q Factor of 45.6312, and BER 0. At wavelength 1550 nm with distance of 5 km it produces a Q Factor of 74.2918, and BER 0. At wavelength 1560 nm with distance of 5 km it produces a Q Factor of 70.2528, BER 0.

In Fig. 3 (a) and (b), Fig. 4 (a) and (b), Fig. 5 (a) and (b), there are differences in the graph of Q Factor and Bit Error Rate produced by SMF and FSO at 1 km, 3km, 5 km which has a significant difference. The Q Factor produced by optical fiber is better than the Free Space Optic, because it is more resistant to noise interference, then the Free Space optics are more susceptible to interference due to atmospheric Factors and depend also on the distance between the transmitter telescope and the receiver, then the power given. The further the distance between the transmitter and the receiver eats the worse the quality of the signal produced.

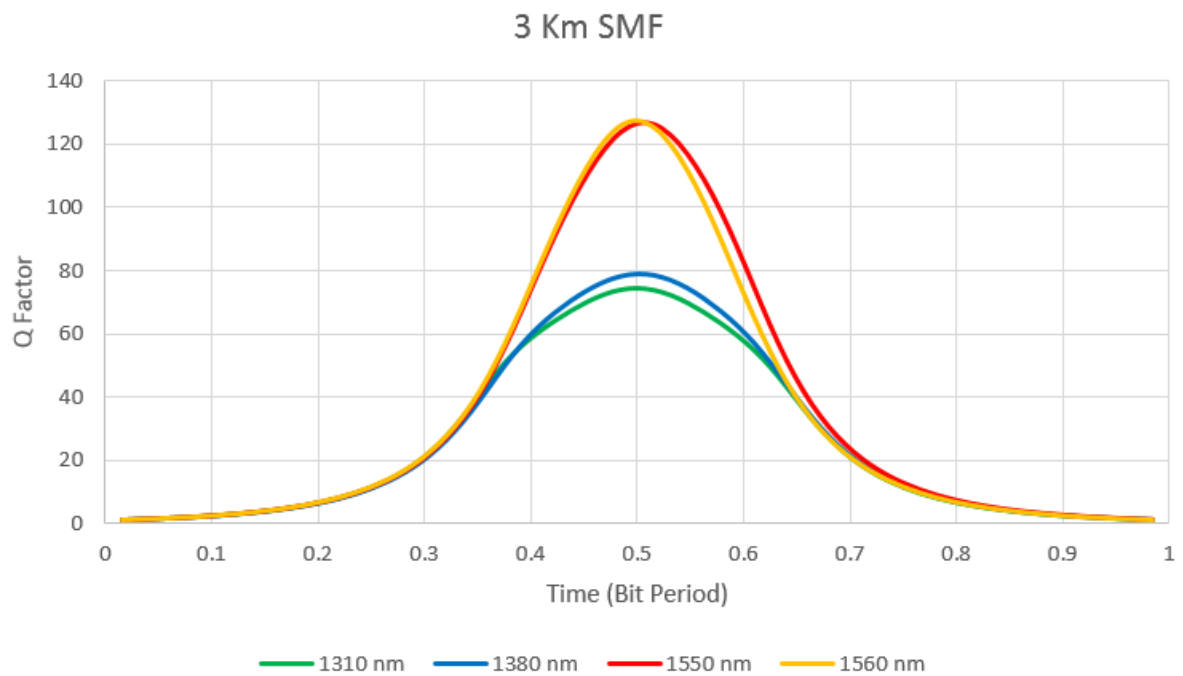
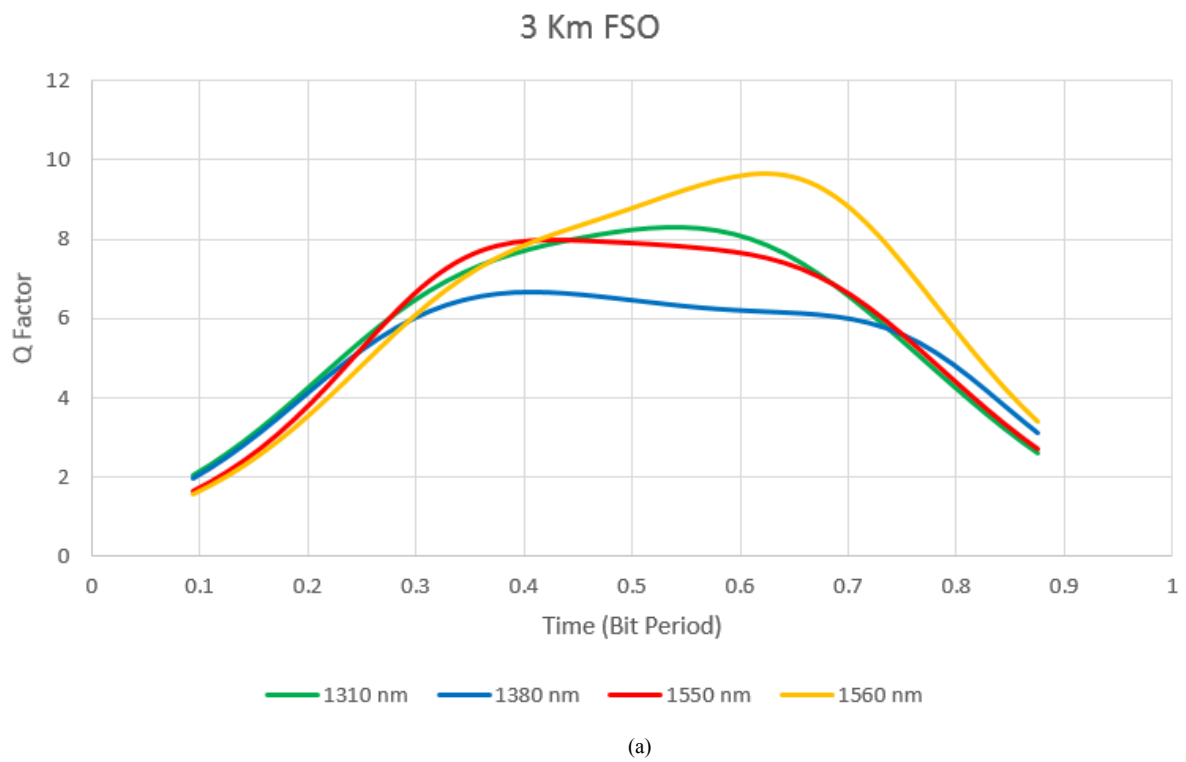


Figure 4. (a) Graph Q Factor FSO with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 3 km (b) Graph Q Factor SMF with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 3 km

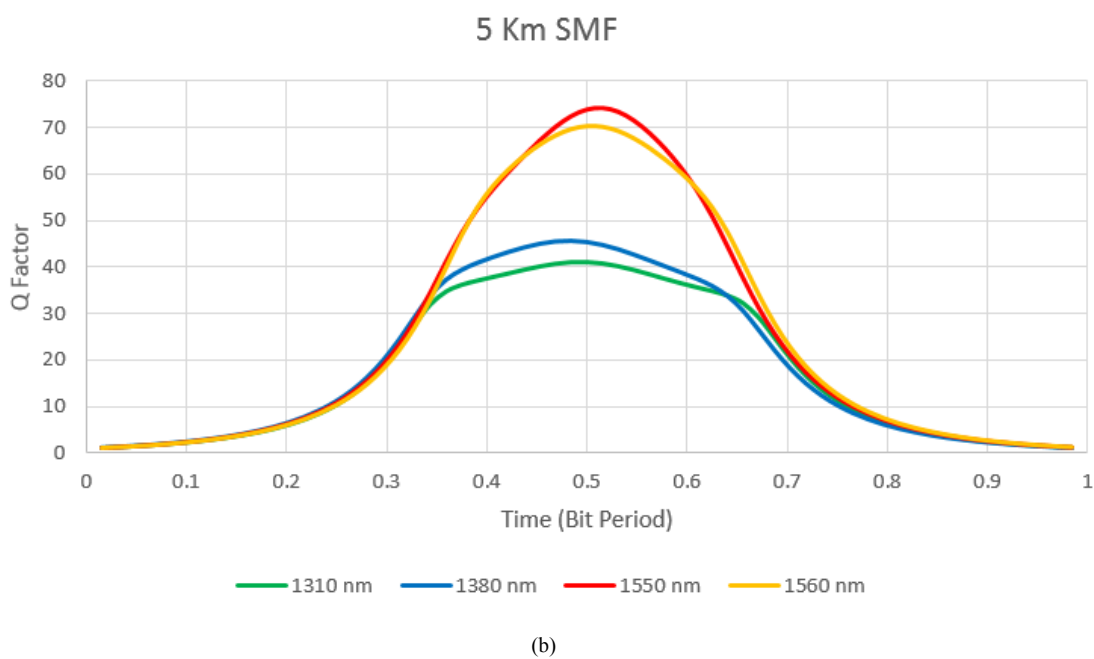
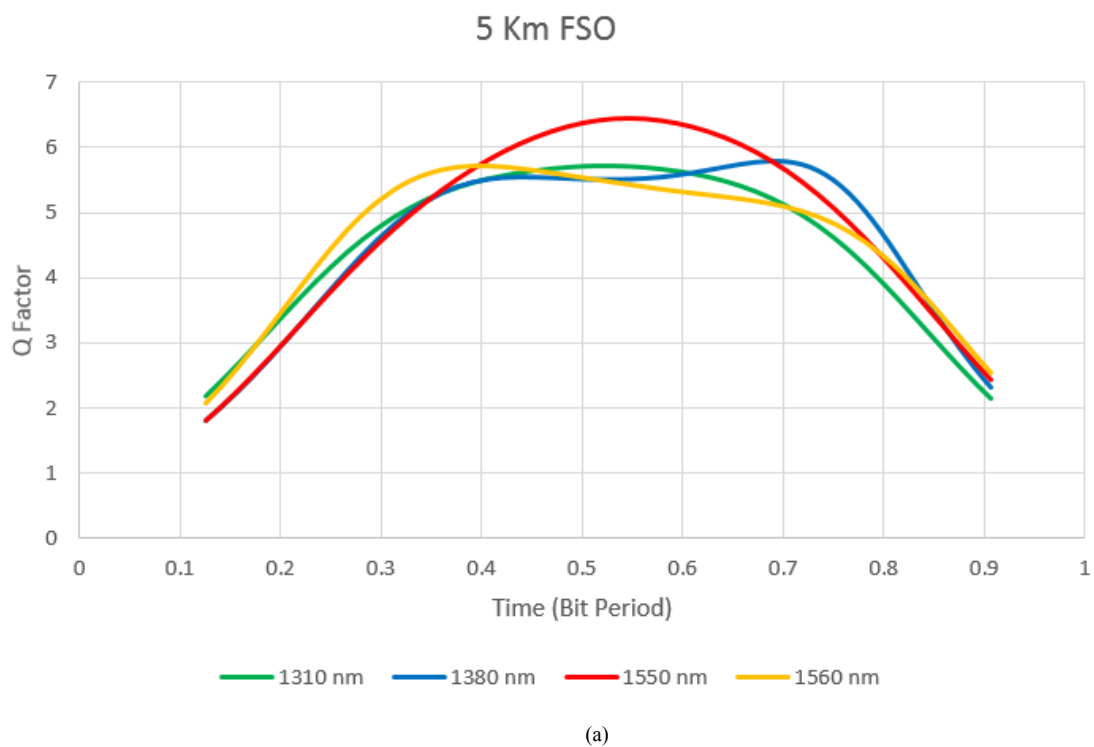


Figure 5. (a) Graph Q Factor FSO with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 5 km (b) Graph Q Factor SMF with Wavelength 1310 nm, 1380 nm, 1550 nm, and 1560 nm at 5 km

5. Conclusions

This paper studied and analyzed various optical communication channels, namely Free Space Optics and Optical Fiber from the results obtained using the Optisystem software program and the simulation results obtained. Then, by looking at the ability of each channel to move along the optical path, the optical fiber channel can provide the best results at 1 km, 3 km, 5 km by calculating the minimum bit error value and increasing the value of the quality Factor. While the quality of FSO is far below optical fiber this is because the Free Space Optic channel is susceptible to atmospheric interference and the distance between the transmitter telescope and the receiver cannot be too far away. From all of the above, it can be concluded from two comparisons that the farther the distance traveled by FSO and SMF the lower the Quality of the signal.

REFERENCES

- [1] Astharini Dwi, Mayola Ary, Nur Octarina Samijayani, Syahriar Ary (2017) "Analisa Kinerja Teknik Modulasi Digital Pada Kanal Optik Nirkabel" Jurnal Elektronika dan Telekomunikasi Vol 17.
- [2] Bijayananda Patnaik, P.K. Sahu (2005) "Optimized Hybrid Optical Communication System for First Mile and Last Mile Problem Solution of Today's Optical Network" Sci Verse Science Direct 2nd International Conference on Communication, Computing and Security, pp.723-730.
- [3] C.J. Anderson, J.A. Lyle, "Technique for evaluation of systems performance using Q in numerical simulation exhibiting intersymbol interference," Electronic Letters, Vol. 30, No. 1, 1994, S. 71-72.
- [4] Ehsan Bayaki, Robert Schober and Ranjan K. Mallik (2009) "Performance Analysis of MIMO Free-Space Optical Systems in Gamma-Gamma Fading" IEEE Transactions on Communications, Vol. 57, Issue 11, pp.3415-3424.
- [5] G. H. and Z. M. J. Alam, R. Alam, (2014) "Improvement of Bit Error Rate in Fiber Optic Communication," Int. J. Futur Comput. Communication, vol. 4, no. 3, pp. 281-286.
- [6] Hendrantoro Gamantyo, Mauludianto. A (2005) "Kinerja Sistem Komunikasi FSO (Free Space Optics) Menggunakan Cell-Site Diversity diDaerah Tropis", Jurnal Teknik ITS Vol 1.
- [7] ITU-T G.976 www.mapyourtech.com (Diakses 14, 1, 2019).
- [8] J.C. Cartledge, G.S. Burley, "The Effect of Laser Chirping on Lightwave System Performance," IEEE Journal of Lightwave Technology, Vol. 7, No. 3, 1989, S. 568-573.
- [9] Murat Uysal, Jing (Tiffany) Li, and Meng Yu (2017) "Error Rate Performance Analysis of Coded Free Space Optical Links over Gamma-Gamma Atmospheric Turbulence Channels" IEEE Transactions on Wireless Communications.
- [10] Nazmi A. Mohammed, Amr S. El-Wakeel and Mostafa H. Aly (2005) "Pointing Error in FSO Link under Different Weather Conditions", International Journal of Video & Image Processing and Network Security IJVIPNS-IJENS vol. 5, No: 01, p.p 6-9.
- [11] Sanjeev Dewra, R.S.Kaler (2013) "Performance Evaluation of an Optical Network based on Optical Cross Add Drop Multiplexer" Opticheski Zhurnal, Vol. 80, pp.46-50.
- [12] Scott Bloom, Eric Korevaar, John Schuster and Heinz Willebrand (2003) "Understanding the performance of free-space optics," Journal of optical vol. 2, pp 34-37, Jun.2003
- [13] Smith G.P. Agrawal, (1997) "Fiber Optic Communication Systems," John Wiley & Sons, New York.
- [14] Vishwakarma Pinky, Vijay Jayprakash, (2016), "Comparative Analysis of Free Space Optics and Single Mode Fiber", International Journal of Advanced Engineering, Management and Science (IJAEMS) Vol.2.
- [15] Wartak S. Marek (2013) "Computational Photonics an Introduction with MATLAB," Cambridge University