

All ▾



☐ Search within Publication

ADVANCED SEARCH

[Browse Conferences](#) > [International Conference on In...](#) > 2019 6th International Confere... ?

## International Conference on Instrumentation Control and Automation (ICA)

[Copy Persistent Link](#)

[Browse Title List](#)

[Sign up for Conference Alerts](#)

Proceedings

All Proceedings

Popular

2019 6th International Conference on Instrumentation, Control, and Automation (ICA)

DOI: [10.1109/ICA48678.2019](https://doi.org/10.1109/ICA48678.2019)

Search within results



Per Page: 25 ▾ | Export ▾ | Email Selected Results ▾

IEEE websites place cookies on your device to give you the best user experience. By using our websites, you agree to the placement of these cookies. To learn more, read our [Privacy Policy](#).

Accept & Close

# CERTIFICATE OF APPRECIATION

This certificate is awarded to

*Dr. Ary Syahriar, DIC.*


for the contribution as **SPEAKER** of

*Performance Analysis of Fiber with Solitons Parameters and Fiber  
Non-Solitons Parameters Using OptiSystem*

**In The 6<sup>th</sup> International Conference on  
Instrumentation, Control, and Automation 2019**

**Bandung, 31<sup>st</sup> July - 2<sup>nd</sup> August 2019**

Head of Instrumentation and Control Research Group  
Faculty of Industrial Technology  
Institut Teknologi Bandung



Prof. Dr.-Ing. Ir. Yul Y. Nazaruddin, M.Sc, DIC

Bandung, 1<sup>st</sup> August 2019  
General Chair



Dr. Ir. Endang Juliastuti, M.Sc.

Organized & Supported by :



Co-Sponsored by :

Patronized by :



**PROCEEDINGS of the**  
**2019 6th International Conference on**  
**Instrumentation, Control, and Automation**  
**(ICA)**

**Bandung, Indonesia**  
**31 July – 2 August 2019**



**IEEE Catalog Number: CFP1979P-ART**  
**ISBN: 978-1-7281-0916-9**

**Organized by:**



**Instrumentation and Control Research Group**  
**Faculty of Industrial Technology**  
**Institut Teknologi Bandung**

**Supported by:** **Technically Co-sponsored by:**



**IEEE Indonesia CSS/RAS Joint Chapter**



# **2019 6th International Conference on Instrumentation, Control, and Automation (ICA)**

Copyright and Reprint Permission:

Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. For reprint or republication permission, email to IEEE Copyrights Manager at [pubs-permissions@ieee.org](mailto:pubs-permissions@ieee.org). All rights reserved.  
Copyright ©2019 by IEEE.

**IEEE Catalog Number: CFP1979P-ART**  
**ISBN: 978-1-7281-0916-9**

# Welcome Message

On behalf of the Planning Committee, I warmly welcome you to the 6th International Conference on Instrumentation, Control and Automation 2019 (ICA 2019). ICA 2019 is hosted by the Instrumentation & Control Research Group, Faculty of Industrial Technology, Institut Teknologi Bandung (ITB) and technically co-sponsored by the IEEE Indonesia Control Systems (CSS) and Robotics and Automation (RAS) Joint Chapter.

The International Conference on Instrumentation, Control and Automation (ICA) is a biennial conference intended to develop a sound networking and to make an international program to alleviate knowledge transfer among engineers, practitioners, researchers, and scientists in the areas of instrumentation, measurement, control, system, automation, robotics, and also industrial informatics.

I would like to take this opening to express my sincere appreciation to all individuals and parties who have supported and contributed to all the preparation of the 6th ICA conference in 2019. My sincere thanks also go to all members of the faculty, the international program committees (IPC), the reviewers, and the authors for their contribution in making 6th ICA 2019 a successful international event. We are also thankful for the provision from the IEEE Indonesia Section who has accommodated to support the possible publication of the proceedings at the IEEE publication's database IEEE Xplore.

ICA 2017 was held in Yogyakarta, whereas this year ICA 2019 is held in Bandung, the capital city of West Java and also nicknamed Paris van Java (Paris of Java) by the Dutch for its resemblance to Paris and European atmosphere back in colonial times. Bandung also earned another nickname as Kota Kembang, literally meaning the Flower City since Bandung used to have a lot of flowers. We hope that the different cities of ICA location would give a refreshing and different atmosphere for all attendees.

On behalf of the planning committee, we hope that this conference would present new insights for future ideas, references, and activities. I am truly thankful for your effort, contribution and participation to the conference. Lastly, I hope that you will have enjoyable memory throughout your visit in this beautiful city, Bandung as the gateway to West Java.

Thank you for your warm attention. Have a great day!

Warm regards,  
Endang Juliastuti  
General Chair of ICA 2019

# Conference Organization

<b>General Chair</b>	Endang Juliastuti (ITB, Indonesia)
<b>Vice General Chair</b>	Vebi Nadhira (ITB, Indonesia)
<b>General Secretary</b>	Miranti Indar Mandasari (ITB, Indonesia)
<b>Treasury Chair</b>	Naila Zahra (ITB, Indonesia)
<b>Technical Program Chair</b>	Ayu G. Risangtuni (ITB, Indonesia)
<b>Publication Chair</b>	Endra Joelianto (ITB, Indonesia) Anugrah Sabdono Sudarsono (ITB, Indonesia)
<b>International Relation Chair</b>	Yul Y. Nazaruddin (ITB, Indonesia)
<b>Public Relation</b>	Sutanto Hadisupadmo (ITB, Indonesia)
<b>Award Chair</b>	Narendra Kurnia Putra (ITB, Indonesia)
<b>Conference Editorial Co-Chairs</b>	Tua Agustinus Tamba (Univ. Parahyangan, Indonesia) Naila Zahra (ITB, Indonesia) Arkanty Septyvergy (ITB, Indonesia) Nadana Ayzah Azis (ITB, Indonesia)

## International Program Committee

Augie Widyotriatmo (Institut Teknologi Bandung, Indonesia)  
Aulia M T Nasution (Institut Teknologi Sepuluh November, Indonesia)  
Aulia Siti Aisjah (Institut Teknologi Sepuluh November, Indonesia)  
Babul Salam KSM Kader Ibrahim (Universiti Tun Hussein Onn, Malaysia)  
Chua Wen-Shyan (Monash University Malaysia, Malaysia)  
Chwee Teck Lim (Mechanobiology Institute Singapore, Singapore)  
Deddy Kurniadi (Institut Teknologi Bandung, Indonesia)  
Edi Leksono (Institut Teknologi Bandung, Indonesia)  
Edoardo Sinibaldi (Istituto Italiano Di Tecnologia, Italy)  
Eduardo Rodrigues (University of Aveiro, Portugal)  
Endang Juliastuti (Institut Teknologi Bandung, Indonesia)  
Endra Joelianto (Institut Teknologi Bandung, Indonesia)  
Esmeralda Contessa Djamal (Universitas Jendral Achmad Yani, Indonesia)  
Fiedhelm Geiger (Siemens, Singapore)  
Graham C. Goodwin (The University of Newcastle Australia, Australia)  
Han-Lim Choi (KAIST, Korea)  
Harijono A. Tjokronegoro (Institut Teknologi Bandung, Indonesia)  
Khi-Jung Ahn (Jeju National University, Korea)  
Makoto Ohta (Tohoku University, Japan)

Miranti Indar Mandasari (Institut Teknologi Bandung, Indonesia)  
Mohd. Ashraf Ahmad (Universiti Malaysia Pahang, Malaysia)  
Ngo Quang Hieu (Can Tho University, Thailand)  
Parsaulian I Siregar (Institut Teknologi Bandung, Indonesia)  
Robert Mahony (Australian Centre for Robotic Vision, Australia)  
Somsak Mitatha (King's Mongkut Institute of Technology Ladkrabang, Thailand)  
Soo Hyung Choi (Chonbuk National University, Korea)  
Soon-Geul Lee (Kyung Hee University, Korea)  
Suprijanto (Institut Teknologi Bandung, Indonesia)  
Tegoeh Tjachjowidodo (Nanyang Technological University, Singapore)  
Tele Tan (Curtin University, Australia)  
Vebi Nadhira (Institut Teknologi Bandung, Indonesia)  
Yong-Hwa Park (KAIST, Korea)  
Yul Yunazwin Nazaruddin (Institut Teknologi Bandung, Indonesia)

## List of Technical Program Committee Members and Reviewers

No	Given Name	Surname	Affiliation	Country	Email
1	Suprijanto	Suprijanto	Institut Teknologi Bandung	Indonesia	supri@tf.itb.ac.id
2	Vebi	Nadhira	Institut Teknologi Bandung	Indonesia	vebi@tf.itb.ac.id
3	Eduardo	Rodrigues	ESAN - University of Aveiro & Zonicstech, Lda	Portugal	emgrodrigues@ua.pt
4	Sutanto	Hadisupadmo	Institut Teknologi Bandung	Indonesia	sutanto@tf.itb.ac.id
5	Endra	Joelianto	Institut Teknologi Bandung	Indonesia	ejoelianto@yahoo.com
6	Augie	Widyotriatmo	Institut Teknologi Bandung	Indonesia	augie@tf.itb.ac.id
7	Edi	Leksono	Institut Teknologi Bandung	Indonesia	edi@tf.itb.ac.id
8	Hadi Teguh	Yudistira	ITERA	Indonesia	hadi.yudistira@gmail.com
9	Esmeralda Contessa	Djamal	Universitas Jenderal Achmad Yani	Indonesia	esmeralda.contessa@lecture.unjani.ac.id
10	Yul Yunazwin	Nazaruddin	Institut Teknologi Bandung	Indonesia	yul_yn@yahoo.com
11	Estiyanti	Ekawati	Institut Teknologi Bandung	Indonesia	esti@instrument.itb.ac.id
12	Anugrah Sabdono	Sudarsono	Institut Teknologi Bandung	Indonesia	anugrah@tf.itb.ac.id
13	Brian	Yuliarto	Institut Teknologi Bandung	Indonesia	brian@tf.itb.ac.id
14	Damar	A	Institut Teknologi Bandung	Indonesia	damar@tf.itb.ac.id
15	Narendra K.	Putra	Institut Teknologi Bandung	Indonesia	narendra@tf.itb.ac.id
16	Endang	Juliastuti	Institut Teknologi Bandung	Indonesia	yuliast@tf.itb.ac.id
17	Jie	Zhang	University of Newcastle	United Kingdom (Great Britain)	jie.zhang@newcastle.ac.uk
18	Deddy	Kurniadi	Institut Teknologi Bandung	Indonesia	kurniadi@tf.itb.ac.id
19	Rosaldo	Rossetti	Faculty of Engineering of University of Porto	Portugal	rossetti@fe.up.pt
20	Han-Lim	Choi	KAIST	Korea	hanlimc@kaist.ac.kr

21	Parsaulian	Siregar	Institut Teknologi Bandung	Indonesia	psiregar.tfitb@gmail.com
22	Fadjar	Fathurrahman	Institut Teknologi Bandung	Indonesia	fathurrahman@gmail.com
23	Soon-Geul	Lee	Kyung Hee University	Korea	sglee@khu.ac.kr
24	Aulia Siti	Aisjah	Institut Teknologi Sepuluh Nopember	Indonesia	auliasa@ep.its.ac.id
25	Wandee	Petchmaneelumka	King Mongkut's Institute of Technology ladkrabang	Thailand	kpwandee@kmitl.ac.th
26	Nibedita	Swain	SIT, BBSR	India	nibeditaswain@gmail.com
27	Roger	Gules	Universidade Tecnológica Federal do Paraná	Brazil	rgules@gmail.com
28	Punnarumol	Temdee	Mae Fah Luang University	Thailand	punnarumol@rocketmail.com
29	Aulia MT	Nasution	Institut Teknologi Sepuluh Nopember	Indonesia	anasution@ep.its.ac.id
30	Agus	Hatta	Institut Teknologi Sepuluh Nopember	Indonesia	amhatta@ep.its.ac.id
31	Joko	Sarwono	Institut Teknologi Bandung	Indonesia	jsarwono@tf.itb.ac.id
32	Isa	Anshori	Institut Teknologi Bandung	Indonesia	isa.anshi@gmail.com
33	Sandhya	Save	University of Mumbai & TCET	India	save_sandhya@rediffmail.com
34	Azizi	Abdullah	Universiti Kebangsaan Malaysia	Malaysia	azizia@ukm.edu.my
35	Ashraf M. A.	Ahmad	National Chiao Tung University	Taiwan	ashraf@csie.nctu.edu.tw
36	Khi Jung	Ahn	Jeju National University	Korea	kjahn@jejunu.kr
37	Mohd	Ashraf	NIT PATNA	India	mohd.ashraf305@gmail.com
38	Hussain	Athab	Multimedia University	Malaysia	hussainathab@yahoo.com
39	Shailendra Chandrakumar	Badwaik	University of Pune & Sinhgad College of Engineering	India	shailbadwaik@gmail.com
40	Parveen	Beg	Aligarh Muslim University	India	parveenbeg@gmail.com
41	Pierluigi Beomonte	Zobel	University of L'Aquila	Italy	zobel@ing.univaq.it

42	Mattia	Butta	Czech Technical University in Prague, Faculty of Electrical Engineering	Czech Republic	mattia@butta.org
43	Han	Choi	POSTECH, Korea	Korea	dokim@postech.ac.kr
44	Wen-Shyan	Chua	Monash University Malaysia	Malaysia	chua.wen-shyan@monash.edu
45	Vijay Daniel	P	Instrumentation & Karunya University	India	vijadaniel@gmail.com
46	Luca De	Vito	University of Sannio	Italy	devito@unisannio.it
47	Dilek	Dustegor	University of Dammam	Saudi Arabia	ddustegor@uod.edu.sa
48	Alessandra	Flammini	University of Brescia	Italy	alessandra.flammini@unibs.it
49	Graham C.	Goodwin	the University of Newcastle	Australia	Graham.Goodwin@newcastle.edu.au
50	Domenico	Grimaldi	University of Calabria	Italy	grimaldi@deis.unical.it
51	Kojiro	Iizuka	Shinshu University	Japan	iizuka@shinshu-u.ac.jp
52	Chwee Teck	Lim	National University of Singapore	Singapore	ctlim@nus.edu.sg
53	King Han	Lim	Curtin University Malaysia	Malaysia	glkhann@curtin.edu.my
54	Robert	Mahony	Australian National University, ARC Centre of Excellence for Robotic Vision	Australia	Robert.Mahony@anu.edu.au
55	Radek	Martinek	VŠB - Technical University of Ostrava	Czech Republic	martinek.radek@gmail.com
56	Dewan	Nuruzzaman	University Malaysia Pahang	Malaysia	dewan052005@yahoo.com
57	Makoto	Ohta	Tohoku University	Japan	ohta@biofluid.ifs.tohoku.ac.jp
58	Yong	Park	Sungkyunkwan University	Korea	pangol@skku.edu
59	Prosanta	Paul	Old Dominion University	USA	ppaul001@odu.edu
60	Wandee	Petchmaneelumka	King Mongkut's Institute of Technology ladkrabang	Thailand	kpwandee@kmitl.ac.th
61	Ladislav	Polak	Brno University of Technology	Czech Republic	polakl@feec.vutbr.cz

62	Eduardo	Rodrigues	ESAN - University of Aveiro & Zonicstech, Lda	Portugal	emgrodrigues@ua.pt
63	Ali	Salamati	Control	Iran	salamati@sina.kntu.ac.ir
64	Koichi	Takiguchi	Ritsumeikan University	Japan	k-taki@fc.ritsumei.ac.jp
65	Tele	Tan	Curtin University	Australia	teletan@cs.curtin.edu.au
66	Nishchal K.	Verma	Indian Institute of Technology Kanpur	India	nishchal@iitk.ac.in
67	Cai	Wei	Xi'an Research Inst. of Hi-Tech	P.R. China	clwn@163.com
68	Naila	Zahra	Institut Teknologi Bandung	Indonesia	naila@tf.itb.ac.id
69	Arkanty	Septyvergy	Institut Teknologi Bandung	Indonesia	arkanty.septyvergy@gmail.com
70	Ayu	Risangtuni	Institut Teknologi Bandung	Indonesia	risangtuni@tf.itb.ac.id
71	Ahmad	Kharies	Institut Teknologi Bandung	Indonesia	ahmad.kharies@gmail.com
72	Nadana	Azis	Institut Teknologi Bandung	Indonesia	nadana.ayzah2@gmail.com
73	Miranti Indar	Mandasari	Institut Teknologi Bandung	Indonesia	miranti.indar.mandasari@gmail.com

# TABLE OF CONTENT

	Page
Copyright .....	ii
Welcome Message .....	iii
Conference Organization .....	iv
List of Technical Committee Members and Reviewers .....	vi
Technical Sessions .....	x
Table of Content .....	xxi
<b>Visual Servo Application Using Model Predictive Control (MPC) Method on Pan-Tilt Camera Platform</b>	<b>1</b>
<i>Christ Freben Dommaris Saragih; Fabiola M. T. R. Kinasih; Carmadi Machbub; Pranoto Rusmin; Arief Syaichu-Rohman</i>	
<b>A Static Output Feedback Predictive Control for a System with Multiple Input Delays</b>	<b>8</b>
<i>Janghoon Yang</i>	
<b>Challenges and Considerations in A Tripping Operation: The Need for an Advanced Control</b>	<b>13</b>
<i>Gilang Samudra Kuswana; Singgih Satrio Wibowo; Herman Sutarto</i>	
<b>Deep Learning with Long Short-Term Memory for Enhancement Myocardial Infarction Classification</b>	<b>19</b>
<i>Annisa Darmawahyuni; Siti Nurmaini; Sukemi.</i>	
<b>Implementation of FPGP-PID for Dynamic Speed Control of Three Phase Induction Motor Based on IFOC</b>	<b>24</b>
<i>Indra Ferdiansyah; Syechu Dwitya Nugraha; Ony Asrarul Qudsi; Lucky Pradigta Setiya Raharja; Diah Septi Yanaratri; Rachma Prilian Eviningsih</i>	
<b>Study of External Force and Impedance Scheme on Stroke Rehabilitation Robot Manipulator</b>	<b>30</b>
<i>Ade Hasan Sumarso; Augie Widyotriatmo; Irwan Purnama</i>	
<b>Performance Ratio Estimation and Prediction of Solar Power Plants Using Machine Learning to Improve Energy Reliability</b>	<b>36</b>
<i>Steven Bandong; Edi Leksono; Ayu Purwarianti; Endra Joelianto</i>	
<b>Detection of Potential Skin Cancer Lentigo Maligna Melanoma and Nodular Melanoma with Expert System Using Variable-Centered Intelligent Rule System (VCIRS) Method</b>	<b>42</b>
<i>Herfi Fani Martiano; Tito Waluyo Purboyo; Casi Setianingsih</i>	
<b>Modelling and Design of a Hybrid Aerial Vehicle Combining VTOL Capabilities with Fixed Wing Aircraft</b>	<b>47</b>
<i>Joshi Alaukik; Tripathi Amritanshu; R. N. Ponnalagu</i>	
<b>Rigorous Modelling Steps on Roll Movement of Balancing Bicopter Using Multi-level Periodic Perturbation Signals</b>	<b>52</b>
<i>Fahmizal Fahmi; Esa Apriaskar; Muhammad Arrofiq; Afrizal Mayub</i>	
<b>Process Control for Isopropanol-Water Separation via Azeotropic Distillation with Dividing Wall</b>	<b>58</b>

*Yovan Wijaya; Herry Santoso; Yansen Hartanto*

<b>Design Control of Forward Motion of an Autonomous Truck-Trailer Using Lyapunov Approach</b>	<b>65</b>
<i>Mohammad Raka Febsya; Rizqi Ardhi; Augie Widyotriatmo; Yul Yunazwin Nazaruddin</i>	
<b>Automated Auscultatory Blood Pressure Measurements Using Korotkoff Sounds Detection: A Preliminary Study</b>	<b>71</b>
<i>Dziban Naufal; Azizah S Noor; Muhammad Khalil; Tati Erawati Rajab; Agung W. Setiawan</i>	
<b>Sunshine Duration Prediction Using 1D Convolutional Neural Networks</b>	<b>77</b>
<i>Andri Mulyadi; Esmeralda Contessa Djamal</i>	
<b>Observer Based Adaptive PI Sliding Mode Controller for Cuk Converter</b>	<b>82</b>
<i>Ramadhani Kurniawan Subroto; Lunde Ardhenta; Kuo Lung Lian</i>	
<b>State of Charge (SOC) and State of Health (SOH) Estimation of Lithium-Ion Battery Using Dual Extended Kalman Filter Based on Polynomial Battery Model</b>	<b>88</b>
<i>Nadana Ayzah Azis; Endra Joelianto; Augie Widyotriatmo</i>	
<b>Analysis of Waveform of Partial Discharge in Oil Insulation Measured by RC Detector</b>	<b>94</b>
<i>Michael Stevano Sinurat; Umar Khayam</i>	
<b>A Portable Surface Roughness Measurement System Using Laser Speckle Imaging Based on GLCM</b>	<b>100</b>
<i>Aditya Pradana; Prawito Prajitno</i>	
<b>EMG Signal Enhancement from ECG Artifact Contamination for Assessment of Swallowing Function</b>	<b>106</b>
<i>Azizah S Noor; Suprijanto; Miranti Indar Mandasari</i>	
<b>Edge Preserving Filter to Support PSF Estimation of Scanning Electron Microscope Images</b>	<b>113</b>
<i>D. Aldi Dwika; M. Octariawan Fauzan; Damar Rastri Adhika; Suprijanto</i>	
<b>Intern Training of Artificial Intelligence Systems</b>	<b>117</b>
<i>John Page; Michael Bain; Faqihza Mukhlis.</i>	
<b>Physiological Pattern of Emotion in Elderly Based on Pulse Rate Variability Features: A Preliminary Study of e-Health Monitoring System</b>	<b>121</b>
<i>Adhi D Wibawa; Lutfi Hakim; Ari Widyanti; Khoirul Muslim; Titis Wijayanto; Fitri Trapsilawati; Hilya Mudrika Arini</i>	
<b>G-Connect: Real-time Early Warning System for Landslide Data Monitoring</b>	<b>127</b>
<i>Mardhani Riasetiawan; Bambang Nurcahyo Prastowo; Nur Achmad Sulistyo Putro; Oktaf Agni Dhewa; Faris Yusuf Baktiar</i>	
<b>Robust Balancing on One-wheeled Human Transporter Based on Rider's Weight Variation Using PID-AFC Method</b>	<b>131</b>
<i>Muhamad Albani Rizki; Eko Mustofa; Endah Suryawati; Eko Henfri Binugroho</i>	

<b>Wind Speed Forecasting Using Recurrent Neural Networks and Long Short Term Memory</b>	<b>137</b>
<i>Fitriana Ningsih; Esmeralda Contessa Djamal; Asep Najmurrokhman</i>	
<b>Performance Analysis of Fiber with Solitons Parameters and Fiber Non-Solitons Parameters Using OptiSystem</b>	<b>142</b>
<i>Tsaura Dwi Fitriani Aulia; Ahmad H. Lubis; Ary Syahriar</i>	
<b>Design of Nonlinear Adaptive-Predictive Control System with ANFIS Modeling for Urea Plant Reactor Unit</b>	<b>147</b>
<i>Abduh Muhammad; Yul Y. Nazaruddin; Parsaulian I. Siregar</i>	
<b>Modelling and Simulation 3D Ultrasound Wave Propagation Using K-Space Pseudospectral Method in the Railway Track Geometry</b>	<b>153</b>
<i>Suprijanto; Deddy Kurniadi; Sinta</i>	
<b>Prototype of Programmable High Voltage Pulse Generator for Simulator NDT Based on Ultrasound Wave</b>	<b>158</b>
<i>Ahmad Zahi Ulul Azmi; Suprijanto; A. Rodik Wijaya</i>	
<b>Implementing Neuro Fuzzy Approach for Bus Arrival Time Prediction Using GPS Data</b>	<b>162</b>
<i>Muhammad Fauzan; Imam Boni Mores; Yul Yunazwin Nazaruddin; Parsaulian Siregar</i>	
<b>Moisture Content Prediction System of Dried Sea Cucumber (Beche-de-mer) Based on Visual Near-Infrared Imaging</b>	<b>167</b>
<i>Sabar; Adhi Harmoko Saputro; Cuk Imawan</i>	
<b>Application of Sensor Fusion for Determining Position and Velocity of Automated People Mover System at Soekarno-Hatta Airport with Extended Kalman Filter</b>	<b>172</b>
<i>Hilmanda Aryandi Putra; Yul Yunazwin Nazaruddin; Endang Juliastuti</i>	
<b>Risk Zone Estimation of Newborn Jaundice Based on Skin Color Image Analysis</b>	<b>176</b>
<i>Endang Juliastuti; Vebi Nadhira; Naila Zahra; Yokanan Wigar Satwika; Naufal Aulia Aziz</i>	
<b>Multilayer Control for Coordinating Three-Wheeled Omnidirectional Mobile Robots</b>	<b>182</b>
<i>Calmantara Sumpono Putra; Augie Widyotriatmo; Kusprasapta Mutijarsa; Faza Fahleraz</i>	
<b>Voltage Control in Push-Pull DC-DC Converter Using State Space Averaging PID with Soft-Start for Electric Vehicle Auxiliary System</b>	<b>188</b>
<i>Albertus Hendra; Fanniesha Hamada; Feri Yusivar</i>	
<b>Comparison Study of Modulation Techniques of Data Communication for HST in CBTC Systems</b>	<b>194</b>
<i>Selvi Lukman; Yul Yunazwin Nazaruddin; Endra Joelianto</i>	
<b>Speed Control and Obstacle Avoidance of A Hexapod Mobile Robot Using Mamdani Type Fuzzy Logic Controller</b>	<b>199</b>
<i>Asep Najmurrokhman; Kusunandar; Udin Komarudin; Sunubroto; Esmeralda Contessa Djamal; Fajar Taufik</i>	

<b>Preliminary Study of Microwave Metamaterial Based on Cylinder-Shaped for Sensor</b>	<b>203</b>
<i>Hadi Teguh Yudistira; Muhammad Asril</i>	
<b>Image Processing of IoT Based Cherry Tomato Growth Monitoring System</b>	<b>207</b>
<i>Nadya Ayu Anugraheni; Asep Suhendi; Hertiana Bethaningtyas</i>	
<b>Image Processing Schemes for Improving Needle Visibility in USG Image Using Curve Transducer</b>	<b>211</b>
<i>Arkanty Septyvergy; Hesty Susanti; Suprijanto; Endang Juliastuti; Vebi Nadhira</i>	
<b>Design of Single and Double Layer Bowtie Antenna as Partial Discharge Sensors on Power Apparatus</b>	<b>216</b>
<i>Muhammad Sukri Habibi Daulay; Umar Khayam</i>	
<b>Earthquake Sensor Based on Surface Water Wave in Cylindrical Container</b>	<b>222</b>
<i>Kawisara Wardkein; Alongkorn Zaechew; Phiphat Chuamuangphan; Paramote Wardkien.</i>	
<b>Data-Driven Construction of Chemical Reaction Network Graph Using Constrained LASSO</b>	<b>226</b>
<i>Tua A. Tamba; Yul Y. Nazaruddin.</i>	
<b>Estimation of Radionuclide Release Activity Using an Unscented Kalman Filter</b>	<b>231</b>
<i>Vineet Vajpayee; Victor Becerra; Nils Bausch; Xiang Tian; T. V. Santhosh; Gopika Vinod</i>	

# Performance Analysis of Fiber with Solitons Parameters and Fiber Non-Solitons Parameters using OptiSystem

Tsaura Dwi Fitriani Aulia  
Electrical Engineering Department  
University of Al Azhar Indonesia  
Jakarta, Indonesia  
tsauradfa@gmail.com

Ahmad Lubis  
Electrical Engineering Department  
University of Al Azhar Indonesia  
Jakarta, Indonesia  
ahlubis@uai.ac.id

Dwi Astharini  
Electrical Engineering Department  
University of Al Azhar Indonesia  
Jakarta, Indonesia  
astharini@uai.ac.id

Ary Syahriar  
Electrical Engineering Department  
University of Al Azhar Indonesia  
Jakarta, Indonesia  
ary@uai.ac.id

**Abstract**—Communication technology is one of the fields of interest today. Optical fiber communication (OFC) is the only answer to overcome the rapid increase in bandwidth requirements. The OFC system offers high speeds up to several gigabits per second and also a very high bandwidth. Optical fiber is very light and has the ability to transfer information in large quantities. Unfortunately, optical fiber transmission systems have effects that can increase fiber signals such as attenuation, dispersion and nonlinearity. Optical solitons that can replace dispersive effects offer a better solution to this problem. Soliton communication systems do not widen along links such as non-soliton communication systems. In this paper will discuss the differences in the performance of fibers with solitons and non-soliton fibers. The results obtained based on eye diagram analysis and bit error rate analysis, it can be seen that fiber systems with soli-tons have minimum distortion, and non-soliton fiber systems have noise in the system.

**Keywords**—Soliton, SPM, GVD, Optical Communication, OptiSystem

## I. INTRODUCTION

Information is a key factor in the communication process. Information is a field that is in great demand today, remembering that the development of the information process has developed very rapidly. Information that arrives at the right place, form and time is the ideal process of sending information. The use of light in communication technology has been developed and being used by many people. The advent of fiber optics has revolutionized telecommunications systems throughout the world, which allows the exchange of information to be very fast at an incredible speed of light. Nowadays, in addition to the use of exchanging information, people use the mobile phone for daily activities such as using online shops, playing games, downloading music or articles. In addition, people also communicate via e-mail, voice chat and video calls with anyone around the world. This situation ultimately demands high-bandwidth information transmission networks. Optical fiber communication (OFC) is the only answer to overcome the rapid growth in bandwidth requirements [1,2].

OFC systems offer very high bandwidth (of the order of Tb/s). Optical fiber is compact, lightweight and has the ability to transfer large amounts of information. Optical fiber has few advantages like 200 times lighter and having a bandwidth of 10,000 times greater than coaxial cable [3-5]. Another advantage is the OFC system has the very large data transmit speed compared to copper or co-axial cables. In OFC, the information that need to be send is coded first into a binary sequence of electric pulses which are then used to modulate the laser beam to produce a sequence of "one and zero" pulse which represents the presence and absence of light. The level of information transfer is expressed as a bit rate, which is nothing but the number of bits sent per second [5].

Unfortunately, optical fiber transmission systems have few drawbacks that can affect fiber signals such as attenuation, dispersion and nonlinearity which may attack single-channel and multiple wavelength transmissions. This dispersion can be a major problem for systems that require high bit rates and for remote communication systems. Thus, dispersion can affect transmission capacity and bandwidth. The direct effect of dispersion is when the light travels across the fiber, its shape will broadened. Optical Solitons that can cancel the dispersive effect offer a better solution to this problem [6].

## II. THEORY

### A. Soliton Optics

The soliton system along the communication channel is stable and lossless [7-8]. The soliton communication system does not widen along the link as in a non-soliton communication system. Soliton waves which have unbroken characteristics, spread or lose strength along with distance, making it ideal for fiber optic communication networks. Soliton in optics refers to a situation where light beam or pulse propagates through a nonlinear optical medium without any cahange in its shape and velocity [10]. Soliton power levels are always maintained to a certain extent. It can be concluded that the optical soliton can maintain its shape when moving with constant time and speed [9].

Solitons are formed due to interactions between Group Velocity Dispersion (GVD) and Self-Phase Modulation (SPM), each of which has a deprecation effect on propagating pulses [8]. To design optical fibers, we need to consider all possible non-linear effects, phenomena that can be the main limiting factors are non-linear effects especially SPM (self-phase modulation) [3,4]. The interaction between non-linear effects and GVD (dispersive effects) is very important for soliton propagation. The equation represents an optical pulse passing in the z-direction through an optical fiber exhibiting GVD and SPM can be written as [10]:

$$i\frac{\partial A}{\partial z} - \frac{\beta_2}{2} \frac{\partial^2 A}{\partial T^2} + \gamma |A|^2 A = 0 \quad (1)$$

with  $A(z, t)$  is the slowly-varying amplitude of the pulse envelope. Equation (1) is referred to as Nonlinear Schrödinger Equation (NLSE) because it resembles the Schrödinger equation with a nonlinear potential term (variable  $z$  playing the role of time and vice-versa). The second term in (1) represents dispersion while the third term accounts for the nonlinearity of the fiber.  $\beta_2$  is the GVD parameter while the parameter  $\gamma$  is a measure of the nonlinearity of the medium [10].

The Nonlinear Schrödinger Equation (NLSE) is a fundamental equation in soliton theory and appears in many branches of science. There exist different analytical method to solve nonlinear partial differential equation. Zakharov and Shabat in 1971 solved Nonlinear Schrödinger Equation (NLSE) using inverse scattering method. Introducing dimensionless variables,  $U = (a/\sqrt{P_0})$ ,  $\xi = (z/L_D)$ ,  $\tau = T/T_0$ , equation (1) can be written as [10]:

$$i \left( \frac{\partial U}{\partial \xi} \right) = \beta_2 \frac{1}{2} \left( \frac{\partial^2 U}{\partial \tau^2} \right) - N^2 |U|^2 U \quad (2)$$

where  $P_0$  is the peak power,  $T_0$  is the width of the incident pulse and the parameter  $N$  is introduced as with  $N^2 = \frac{L_D}{L_{NL}} = \frac{\gamma P_0 T_0^2}{|\beta_2|}$ . For anomalous dispersion regime  $\beta_2 < 0$ , while for normal dispersion regime  $\beta_2 > 0$ . In the normal dispersion regime the high frequency components of an optical pulse travel slower than the low frequency components. The anomalous regime plays an important role in nonlinear fiber optics, in particular, for the formation of highly stable and distortionless soliton. The dispersion length is defined as  $L_D = (T_0^2/|\beta_2|)$ , while the nonlinear length is defined as  $L_{NL} = (1/\gamma P_0)$  [9]. For the anomalous dispersion regime, (2) now takes the form [10], putting  $u = NU$ ,

$$i \frac{\partial u}{\partial \xi} + \frac{1}{2} \frac{\partial^2 u}{\partial \tau^2} + |u|^2 u = 0 \quad (3)$$

The solution of this equation is given by  $u(\xi, \tau) = \text{sech}(\tau) \exp(i\xi/2)$ , it is called fundamental soliton solution of (3) and has a bell-shaped form. In the context of optical fibres, this solution indicates that if a hyperbolic secant pulse whose the peak power  $P_0$  and width  $T_0$  is launched into an ideal lossless optical fiber, the pulse will propagate undistorted without any change in shape for fickle long distances. The peak power to support the fundamental soliton inside an optical fiber is given by  $P_0 = (|\beta_2| \gamma T_0^2) \approx$

$3.11|\beta_2| \gamma T_{FWHM}^2$ , where the FWHM (full width at half maximum) of the soliton is  $T_{FWHM} \approx 1.76T_0$  [9-10].

### B. Group Velocity Dispersion

Group Velocity Dispersion (GVD) is a phenomenon that describes light waves that move in optical fibers gradually pulse widening and peak power decreases with time and distance. So that it overlaps with other pulses and makes the recipient's input unable to distinguish between pulses. In this way the dispersive characteristics determine the fiber carrying capacity of the information [11-12].

The group delay ( $\tau_g$ ) per unit length in direction of propagation is given by [6]:

$$\frac{\tau_g}{L} = \frac{1}{v_g} = \frac{1}{c} \frac{d\beta}{dk} = -\frac{\lambda^2}{2\pi c} \frac{d\beta}{d\lambda} \quad (4)$$

where  $L$  is the distance traveled by the pulse,  $\beta$  is the propagation constant along fiber axis, wave propagation constant  $k = 2\pi/\lambda$  and group velocity  $v_g = c \left( \frac{d\beta}{dk} \right)^{-1}$ .

The factor of  $\beta_2 \equiv d^2\beta/d\omega^2$  is the GVD parameter, which determines how much a light pulse broadens in time as it is transmitted over the fiber [6].

### C. Self-Phase Modulation

Self-phase modulation (SPM) is a phase shift in pulses caused by changes in frequency. Variations in frequency can also be called the chirping phenomenon. SPM can arise because the refractive index on fiber has components that depend on intensity. Another part of the pulse experiences a phase shift caused by the dependence of the intensity of phase fluctuations. Therefore the main effect of SPM is to expand the pulse spectrum, keeping the temporal shape unchanged [5].

For fibers containing high transmission power, phase ( $\phi$ ) is introduced by field  $E = E_0 \cos(\omega t - kz)$  over a fiber length  $L$  is given by [6]:

$$\phi = \frac{2\pi}{\lambda} (n_l + n_{nl}) L_{eff} \quad (5)$$

with effective length  $L_{eff} = (1 - \exp(-\alpha L))/\alpha$ . For  $n_l$  is linear refractive indices and  $n_{nl}$  is nonlinear refractive indices. The first term on right hand side refers to linear portion of phase constant ( $\phi_l$ ) and second term provides nonlinear phase constant ( $\phi_{nl}$ ). Changes in spectrum frequency are caused by phase variations with time.

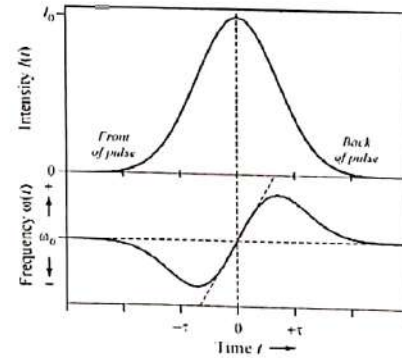


Fig. 1 Spectral broadening of a pulse due to SPM. [6]

As mentioned earlier, SPM produces chirping phenomenon (frequency variation), which leads to the

expansion of spectral pulses without any changes in the temporal distribution. Chirp generated by SPM can be used to modify the effect of pulse expansion from dispersion [6].

#### D. Return-to-zero (RZ) modulation

Optical fiber communication has the main purpose of sending the maximum number of bits per second over the maximum possible distance with the fewest error [13]. In fiber optic communication, signal modulation systems are the main problem that determines the quality of transmission. The optical communication format affects the other parameters of system such as optical spectral bandwidth, tolerance to chromatic dispersion, resistance to nonlinear crosstalk and other system performance measures are directly related to the optical modulation format. The optical modulation formats is also an important parameter to optimize the system performances, as it can increase the speed of optical transmission. The main aim of modulation formats is for the reduction of non-linear impact and improvement of the spectral efficiency at high bit rate in optical systems [14].

There are many modulation schemes that are come into existence for long-haul systems. The most simple one is the non-return-to-zero (NRZ) format. The pulse of NRZ format is on for the entire bit period. In addition to the NRZ format, there is also an RZ format whose pulse is only for a portion of the bit period. RZ pulses are less susceptible to inter-symbol interference and better nonlinear resistance. The popular solution for the 10Gb/s system is RZ modulation because it has a higher peak power compared to NRZ. Also, it has a lower bit error rate encoded and a higher signal-to-noise ratio. [13-15].

### III. METHODOLOGY

This study will discuss the differences in performance between soliton fibers and non-soliton fiber parameters. The system designed using the OptiSystem software. The analysis was carried out using two simulation tools namely BER (Bit Error Rate) analyzer and Optical Time Domain Visualizer (OTDV). BER Analyzer is used to look at q-factor, minimum bit error rate, and eye height. Optical Time Domain Visualizer is used to see pulses in the time domain.

#### A. Bit Error Rate, Q-Factor and Eye Height

In terms of telecommunications transmission, the bit error rate (BER) is the percentage that has an error relative to the total number of bits received in a transmission. BER is an indication of how often data must be retransmitted due to an error [16]. By using optical software, the bit error rate can be calculated using a formula [17]:

$$BER = \frac{1}{2} \operatorname{erfc} \left( \frac{Q}{\sqrt{2}} \right) \quad (6)$$

with  $Q$  is q-factor, which is a dimensionless parameter that shows energy in the resonance element. Elements can form anything, for example from a mechanical pendulum, an element in a mechanical structure, or in an electronic circuit such as a resonance circuit. The  $Q$  factor indicates energy relative to the amount of energy transferred in the system. The higher the  $Q$  the lower the energy level and the higher it decreases, the higher the attenuation rate gets lower [18]. By using optical software, the  $q$  factor can be calculated using the formula [17]:

$$Q = \frac{|\mu_1 - \mu_0|}{\sigma_1 + \sigma_0} \quad (7)$$

with  $\mu_0, \mu_1, \sigma_0$  and  $\sigma_1$  are average values and standard deviations of the sampled values respectively.

Eye height is one parameter of eye diagram. By using eye diagrams, signal quality can be seen with one view. In addition, it can diagnose problems such as attenuation, noise, jitter and dispersion that appear or characterize certain parts of a system. The eye height is a measure of the vertical opening of an eye diagram. An ideal eye opening would be a level to zero level. However, the noise on the eye will cause the eye to close. The eye height measurement determines eye closure due to noise [19]. By using optical software, the eye height can be calculated using the formula [17]:

$$E_H = (\mu_1 - 3\sigma_1) - (\mu_0 + 3\sigma_0) \quad (8)$$

System fiber non-soliton was design using the Optisystem software as the Fig. 2 shown below:

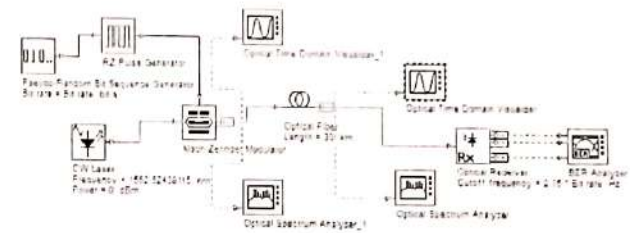


Fig. 2 Design Fiber non-soliton parameters [1].

Design of a fiber system without solitons uses a return-to-zero pulse generator as its input pulse which will then pass through 30km of optical fiber. In contrast to those without solitons, system fiber with soliton was design with a secant pulse generator as its input. Both of these designs are using the Optisystem software. Soliton system fiber with is in the Fig. 3. shown below:

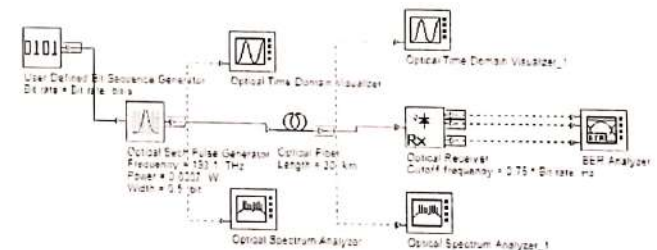


Fig. 3 Design Fiber with soliton parameters [1].

TABLE I. FIBER WITH SOLITON PARAMETERS

Parameter	Symbol	Value	Unit
Wavelength	$\lambda$	1.55	nm
Bit Rate	$B$	40	Gbps
Non-linear coefficient	$\gamma$	1.3	1/kmW
GVD	$\beta_2$	-20	ps <sup>2</sup> /km
Width Parameter	$T_0$	13.2	ps
Peak Power	$P_0$	36.68	mW
Losses	$\alpha$	0.2	dB/km

#### IV. RESULT AND ANALYSIS

This project was previously carried out by [1]. Non-soliton fiber systems use RZ pulses as signal generator while fiber with soliton systems use hyperbolic secant pulses.

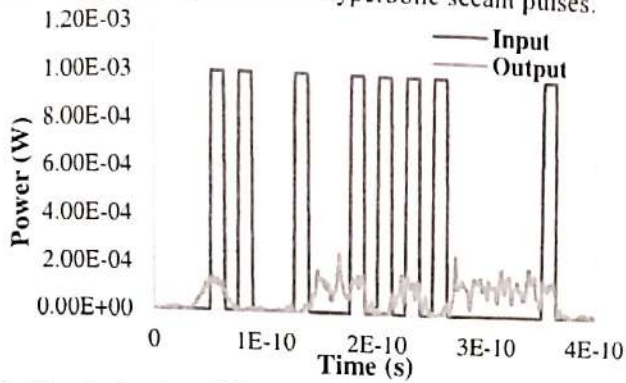


Fig. 4 Input and output of Fiber non-soliton parameter (using RZ pulse)

In Fig. 4 it can be seen the output produced by the non-soliton fiber system has pulses broadening and decreasing power. In other words, the output pulse is dispersed after passing through the fiber. One method that can overcome this problem is by utilizing soliton pulses that use nonlinear effects to maintain their shape and width in anomalous dispersion regimes.

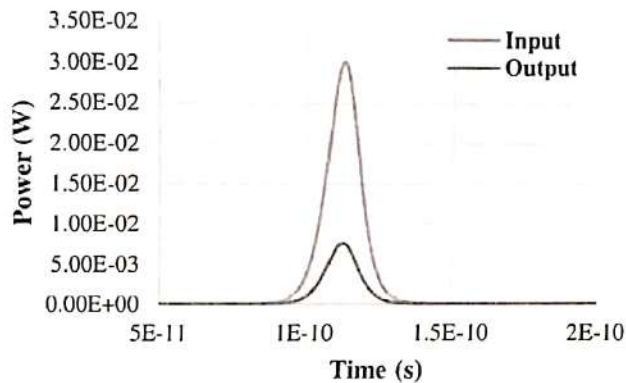


Fig. 5 Input and output of Fiber with-soliton parameter (using secant hyperbolic pulse)

The fiber with soliton system design was carried out using the OptiSystem software. The input used is a secant hyperbolic pulse. It can be observed that the output of this system in Fig. 5 that pulses do not broaden, and the power has decreased. This can show that fiber with soliton systems have a fixed shape after passing through optical fiber. It can be said that pulses do not experience dispersion. Regarding the declining power, this is influenced by attenuation included in this simulation.

The following Table II are the results obtained on fiber non-soliton parameters and fiber with soliton parameters.

TABLE II. RESULTS FOR THE SYSTEM FIBER NON-SOLITON AND FIBER WITH SOLITON USING OPTISYSTEM SOFTWARE.

Parameter	Fiber non-soliton	Fiber with soliton
Signal Generator	RZ pulse	Secant Hyperbolic
Max. Q-Factor	14.63	207.897
BER	8.763e-049	0
Eye Height	8.597e-005	0.0056

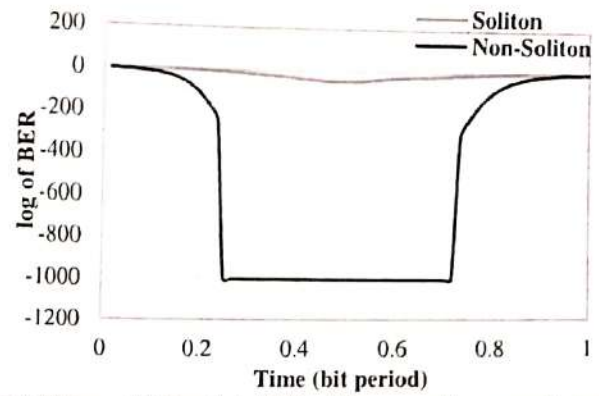


Fig. 6 Minimum Bit Error Rate (BER) of fiber non-soliton parameter and fiber with soliton parameter.

The minimum bit error (BER) value obtained from the BER analysis on optical system software shows quite a number between non soliton fibers and fibers with solitons. According to the Table II the fiber system with soliton has a 0 error bit and a non-soliton fiber system 8.76e-049. Graphs can be seen as soliton and non-soliton parameters selected in Fig. 6. Less signal power is lost along the transmission path when the BER is lower which directly improves system performance [19]. This means that fiber with soliton system has better performance.

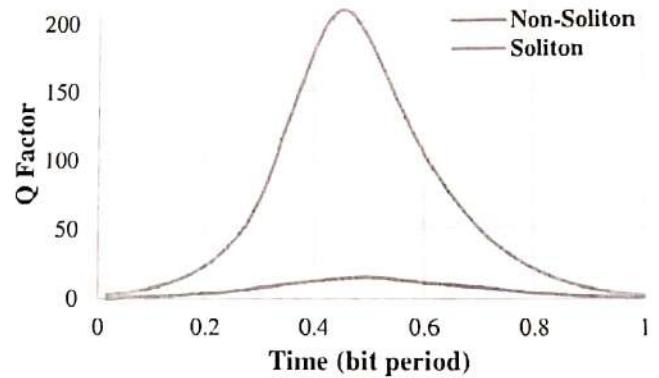


Fig. 7 Q-factor of fiber non-soliton parameter and fiber with soliton parameter.

Fig. 7 shows Q-factor of fiber non-soliton parameter and fiber with soliton parameter. The q factor allows simplified analysis of system performance [20]. As the value of Q factor increases, less signal power is loss and more error is produced due to lower value of Q-factor. A fiber non-soliton system has a maximum q factor value of 14.63 which means having more error in the system. While fiber with soliton system has a maximum value of q factor of 207.897 which means having less power loss.

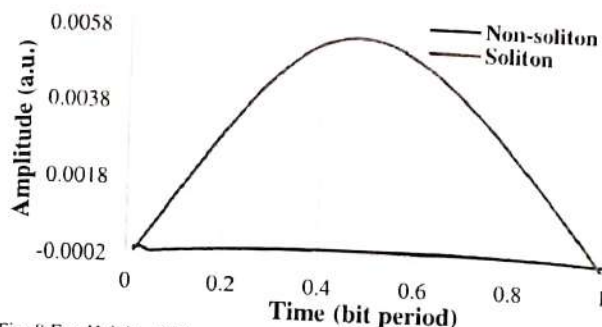


Fig. 8 Eye Height of fiber non-soliton parameter and fiber with soliton parameter.

Fig. 8 show eye height for fiber non-soliton systems and fiber with solitons system. The height of the eye opening at the specified time interval shows the noise margin or noise immunity of the system [20]. Fiber with soliton has an eye height of 0.005686 while the system fiber non-soliton has an eye height of 0.0018. It can be seen that a system with a soliton has a maximum eye height, which indicates that the signal distortion is minimum. A fiber non-soliton system has a poor eye opening, which shows noise in the system.

## V. CONCLUSION

Optical fiber communication system with pulse soliton has better performance compared to non-soliton fiber. Based on the analysis of the eye diagram, it can be said that the soliton fiber system has minimum distortion, and the non-soliton fiber system has noise in the system.

## ACKNOWLEDGMENT

This research was supported by Electrical Engineering Department, University of Al Azhar Indonesia. We thank to colleagues who provided insight and expertise that greatly assisted the research.

We thank Mr. Ary Syahriar and Ms. Dwi Astharini as supervisor for assistance with particular techniques, and Mr. Ahmad Lubis from University of Al Azhar Indonesia for comments that greatly improved the manuscript. Also for the "anonymous" reviewers for their comments that were very helpful in improving this paper.

## REFERENCES

- [1] A. Hafiz, "Optical Soliton in Long Haul Telecommunications with Fiber Loss Factor," Universiti Teknikal Malaysia, Melaka, 2012.
- [2] S. Bala and A. Sheetal, "Solitons: Novel Approach for Dispersion Management," *IJRET: International Journal of Research in Engineering and Technology*, vol. IV, no. 07, pp. 411-418, 2015.
- [3] M. Fadhiyan, A. Hambali and A. D. Pambudi, "Analisis Perbandingan Pulsa Gaussian dengan Pulsa Secant Hiperbolik pada Transmisi

- Soliton, Universitas Telkom," *e-Proceeding of Engineering*, vol. II, no. 02, pp. 2370-2376, 2015.
- [4] T. F. Siahaan, S. and M. Edisar, "Penentuan Gelombang Soliton Pada Fiber Bragg Grating Dengan Menggunakan Metode Step-Split," *Jurnal Online Mahasiswa FMIPA Universitas Riau*, vol. II, no. 1, pp. 212-218, 2015.
- [5] R. Nagesh, R. Mohan R and A. R. S., "A Survey on Dispersion Management using Optical Solitons in Optical Communication System," *Elsevier: Procedia Technology* 25, no. 25, pp. 552-529, 2016.
- [6] R. Gangwar, S. P. Singh and N. Singh, "Soliton Based Optical Communication," *Progress In Electromagnetics Research*, no. 74, pp. 157-166, 2007.
- [7] B. S. N, D. V. U. and J. S. S., "Analysis of SPM, XPM, and FWM in Fiber Optic Communication using OptiSystem," *International Journal of Science Technology & Engineering*, vol. II, no. 7, pp. 136-142, 2016.
- [8] M. K. Kothapalli, "Dispersion Managed Soliton," California State University, Northridge, 2017.
- [9] K. G. Tay, A. H. Kah Ching, W. S. Loi and C. T. Ong, "Optical Soliton Simulation in Optical Fibers by OptiSystem," *International Research and Innovation Summit*, pp. 1-12, 2017.
- [10] V. Kuriakose and K. Porsezian, "Elements of Optical Solitons: An Overview," Department of Physics Cochin University of Science and Technology, 2010.
- [11] S. S. and L. G. B., "Optical Solitons Simulation Using DSF and Optical Pulse Generator in Single Mode Optical Fiber," *International Journal of Science and Research (IJSR)*, vol. IV, no. 2, pp. 254-258, 2013.
- [12] M. S. Wartak, *Computational Photonics: an introduction with MATLAB*, 2013: Cambridge University Press, Cambridge.
- [13] M. Arshad and M. A. Ansari, "Performance Analysis of Dispersed Manage RZ Pulse," *International Journal of Scientific and Research Publication (IJSRP)*, vol. III, no. 12, pp. 1-3, 2013.
- [14] S. Jawla, "Intensity Modulation Formats in Optical Communication System," *International Journal of Scientific & Engineering Research (IJSER)*, vol. IV, no. 12, pp. 584-589, 2013.
- [15] P. Singh, D. K. Tripathi, N. K. Shukla and H. K. Dixit, "Investigation of All-Optical Inverter System with NRZ and RZ Modulation Formats at 100 Gbit/s," *Technical Gazette* 21, no. 4, pp. 757-761, 2014.
- [16] S. M. J. Alam, M. R. Alam, G. Hu and M. Z. Mehrab, "Bit Error Rate Optimization in Fiber Optic Communication," *International Journal of Machine Learning and Computing*, vol. I, no. 5, pp. 453-440, 2011.
- [17] G. P. Agrawal, *Fiber-Optic Communication Systems: Third Edition*, New York: A John Wiley & Sons Inc., Publication, 2002.
- [18] B. Sklar, *Digital Communications: Fundamentals and Applications*, New Jersey: Prentice Hall.
- [19] A. D. Gaikwaid, "Eye Diagram Assessment Platform for Fiber-Optic Communication," Rochester Institute of Technology, 2018.
- [20] A. A. Anis, C. B. M. Rashidi, A. K. Rahman, S. A. Aljunid and N. Ali, "Analysis of the effect of BER and Q-factor on Free Space Optical Communication System using Diverse Wave-length Technique," in *EPJ Web Conferences* 162, 2017.