



CERTIFICATE

01 / CRF / SITIA / 12 / V / 2012

this is to certify that

ARY SYAHRIAR

has participated on
**13th SEMINAR ON INTELLIGENT TECHNOLOGY
AND ITS APPLICATIONS**
as
presenter

paper title

**Thermo-Optic Effects on Silica Based Microring
Resonator (MRR).
Gain Characteristic in L-Band EDFA Threshold Pump
Power in L-Band EDFA**

Surabaya, May 23rd 2012
General Chairman SITIA 2012



Dr. Heri Suryopratomo, ST., MT.
NIP. 198006032006041003



SITIA 2012
13th Seminar on Intelligent Technology
and Its Applications

May 23rd 2012

at AJ Building, Dept. of Electrical Engineering Campus,
Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia

Proceeding

ISSN : 2252-8296

Volume 13

Abstract Proceeding Edition

May 23rd 2012

at AJ's Building.

Dept. of Electrical Engineering Campus.
Institut Teknologi Sepuluh Nopember.
Surabaya, Indonesia.



11th Seminar on Intelligent Techn
6th International Conference





The 13th Seminar on Intelligent Technology and Its Applications
ISSN : 2252-8296

PUBLISHED BY

Electrical Engineering Department

Faculty of Industrial Technology

Institut Teknologi Sepuluh Nopember (ITS)

Campus ITS, Keputih, Sukolilo

Surabaya 60111

ISSN 2252-8296

The 13th Seminar on Intelligent Technology and Its Applications

Copyright © 2012 by Electrical Engineering Department, Institut Teknologi Sepuluh Nopember

All rights reserved. No part of this book, may be reproduced, stored, or transmitted, in any forms or by any means without the prior permission in writing from the publisher.

May 23rd 2012

at AJ's Building, Dept. of Electrical Engineering Campus,
Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia



PROCEEDINGS OF THE 13TH SEMINAR ON INTELLIGENT TECHNOLOGY AND ITS APPLICATIONS

EDITOR-IN-CHIEF

Dr. Heri Suryoatmojo
E-mail : suryomgt@ee.its.ac.id

SECRETARY

Dr. Achmad Mauludiyanto
E-mail : maulud@ee.its.ac.id

EDITORIAL COORDINATORS

Telematics

I Ketut Eddy Purnama, ST., MT., Ph.D
E-mail : ketut@ee.its.ac.id
Muhtadin, ST., MT.
E-mail : muhtadin_s@elect-eng.its.ac.id

Telecommunication

Dr. Achmad Mauludiyanto
E-mail : maulud@ee.its.ac.id
Devy Kuswidiastuti, ST., M.Sc.
E-mail : devy@ee.its.ac.id

Electronics and Instrumentation

Dr. Achmad Arifin
E-mail : arifin@ee.its.ac.id
Ir. Totok Mujiono, Ml.Kom
E-mail : totok_m@ee.its.ac.id

Control System

Dr. Ir. M. Rameli
E-mail : rameli@ee.its.ac.id
Imam Arifin, ST., MT.
E-mail : arifin-i@ee.its.ac.id

Power System

Dr. Dedet Chandra Riawan
E-mail : dedet@ee.its.ac.id
Vita Lystianingrum Budiharto Putri, ST., M.Sc
E-mail : vita@ee.its.ac.id

EDITORIAL ADVISORY BOARD

Dr. Tri Arief Sardjono, ST., MT.
Head of Department of Electrical Engineering
Institut Teknologi Sepuluh Nopember (ITS), Surabaya
E-mail : t.a.sardjono@ee.its.ac.id

SITIA's Proceeding is published once every year



COMMITTEE OF SITIA 2012

Honorary Chairman:

Prof. Dr. Ir. Triyogi Yuwono, DEA
Rector of Institut Teknologi Sepuluh Nopember (ITS)

General Chairman:

Dr. Heri Suryoatmojo

Technical Committee:

Prof. Dr. Mohammad Nuh (ITS),
Prof. Dr. Soebagio (ITS),
Prof. Dr. Ontoseno Penangsang (ITS),
Prof. Dr. Mauridhi Hery Purnomo (ITS),
Prof. Dr. Abdullah Alkaff (ITS),
Prof. Dr. Achmad Jazidie (ITS),
Prof. Dr. Moh. Ashari (ITS),
Prof. Dr. Imam Robandi (ITS),
Prof. Dr. Adi Soeprijanto (ITS),
Prof. Dr. Gamantyo Hendranto (ITS),
Prof. Dr. Ir. G.J. Verkerke (Groningen, Netherlands),
Prof. Dr. Tsuyoshi Usagawa (Kumamoto University, Japan),
Prof. Dr. Takeshi Hiyama (Kumamoto University, Japan),
Prof. Dr. Akira Matsushita (Kumamoto University, Japan),
Prof. Dr. T. Nakamoto (Tokyo Institute of Technology, Japan)
Dr. Adel Elbaset (Minia University, Egypt)
Dr. Engin Karatepe (Ege University, Turkey)
Dr. Ir. M.H.F. Wilkinson (Groningen, Netherlands),

Dr. I Ketut Eddy Purnama (ITS),
Dr. M. Rameli (ITS),
Dr. Wirawan (ITS),
Dr. Ari Santoso (ITS),
Dr. Djoko Purwanto (ITS),
Dr. Achmad Affandi (ITS),
Dr. Achmad Arifin (ITS),
Dr. M. Rivai (ITS),
Dr. Moch. Hariadi (ITS),
Dr. Tri Arief Sarjono (ITS),
Dr. Yoyon K. Suprpto (ITS),
Dr. Achmad Mauludiyanto (ITS),
Dr. Dedet Chandra Riawan (ITS),
Dr. Titon Nugroho (ITS),
Dr. Ardyono P. (ITS),
Dr. Suwadi (ITS),
Dr. Trihastuti Agustinah (ITS),
Dr. Dadet Pramadihanto (ITS),
Dr. Son Kuswadi (ITS),
Dr. Endra Pitowarno (ITS),
Dr. Agus Zaenal Arifin (ITS)
Dr. Rony Seto (ITS)

Organizing Committee:

Immanuel Natanael R.	Febrila Lupita	Aldhimas	Aufar Gusviandi P.
Alfina Zussida	Gilang Sholeh A.	Ni Wayan	Pungki Priambodo
Nezya Nabila	Debby P. T.	Ahmad Rifai	Faradhiba Rezqi
Siti Aisyah	Iyoka Cininta P.	Chairul Rizal	Nurdiansyah P.
Annisa Riani Sabila	Rosyid Hadi N.	Verdie Feryawan	Chyntia Ayuning P.
Dwi Didit P.	Bayu P. W.	Rizky Adam A.	Armando A. G. Sihite
Cindera Gana	Diah Kusumawati	Bagas Prasetya	Fakhrudin Azhar
Arda	Hosyi'ah Rusdiana	Arie Arifin	Atya Mahatmya
Nicolaus Radian Putra	Yusro	Luvy Arfendi P.	Ersha Okta R.
Weta Harry W.	Denny Novian M.	Gary Almas	Vivin Violita
Shandy Baskoro	Iskandar D.	Brilyan Muhammad	Agus Lesmana
Raymond Sinaga	Fadil Muhammad	Arnoldus Gerry S.	Randy Immanuel S.
Charisma Vian	Destina Surya	M. Syaiful Arif	Amin D. N.
Rosita Elvina	Herlambang Setiadi	Antonius Aryo W.	Evi Rahmawati



PREFACE

Dear Colleagues,

On behalf of Technical Program Committee and Organizing Committee of SITIA 2012, I am honored to welcome you to *the 13th Seminar on Intelligent Technology and Its Applications (SITIA)*. This annual seminar is organized by **Electrical Engineering Departement, Institut Teknologi Sepuluh Nopember (ITS) Surabaya**. The objective of this seminar is to promote the fruitful growth of researches in various fields in Electrical Engineering and its related fields presented in international oral presentation, domestic oral presentation, and poster presentation. This seminar also provides forum for researchers, scientist, and engineers to exchange ideas and their current achievements.

This year we have received **127 paper submissions** from universities, research centers, and industries, the Technical Program Committee accepted **107 selected papers** that should be presented in this seminar. The accepted papers are categorized into five groups; **Computer Engineering and Telematics, Electronics, Power Systems, Telecommunications and Control Systems**. This number the continues attraction on this seminar as an important forum. The quality of papers incresed year by year.

At last, the success of this seminar is due to the hard effort of many people especially students of Electrical Engineering Departement of ITS which we gratefully acknowledge. We thank also to the authors whose papers are presented, the invited keynote speakers, and all parties that we are not able to mention here.

We wish you all can enjoy one day discussion through this seminar and could spend to enjoy the beauties of Surabaya City and ITS-Campus. We hope to meet you again in the next seminar, the 14th Seminar on Intelligent Technology and Its Application 2013.

Surabaya, May 23rd 2012

General Chairman of SITIA 2012

Dr. Heri Suryoatmojo

NIP. 198006032006041003



SCHEDULE OF SITIA 2012

07.30-08.00	Registration
08.00-08.05	Welcome Speech by MC
08.05-08.15	Opening Ceremony
08.15-08.20	Welcome Speech : General Chairman of SITIA 2012 Dr. Heri Suryoatmojo
08.20-08.30	Welcome Speech: Head of Electrical Engineering Department, ITS Dr. Tri Arief Sardjono, ST., MT.
08.30-08.40	Welcome Speech : Rector of ITS Prof. Dr. Ir. Triyogi Yuwono, DEA
08.40-09.15	1st Keynote Speaker:
	Prof. Han Shik Chung (Gyeongsang National University, Korea)
	Discussion
09.15-09.50	2nd Keynote Speaker :
	Prof. Er Meng Joo (Nanyang Technology University, Singapore)
	Discussion
09.50-10.10	Break
10.10-10.40	3rd Keynote Speaker :
	Dr. Dedet Candra Riawan, ST., M.Eng. (Institut Teknologi Sepuluh Nopember - Indonesia)
	Discussion
10.40-12.25	Poster Session
12.25-13.00	Lunch Break & Pray
13.00-15.00	Parallel Session I
15.00-15.30	Break II
15.30-17.00	Parallel Session II
17.00-17.15	Closing Ceremony

SCHEDULE OF PRESENTATION SESSION

Time	Room I	Room II	Room III	Room IV	Room V	Room VI
Parallel Session I 13.00 – 15.00 WIB	International	International	International	Domestic	Domestic	Domestic
	Computer and Telematics	Electronics, Telecommunications	Power Systems, Control Systems	Computer and Telematics	Computer and Telematics, Electronics	Electronics, Telecommunications
	001	027	014	003	009	004
	031	038	032	013	010	006
	035	046	057	016	011	007
	094	052	060	017	018	055
	012		045	019	028	105
	Room VII	Room VIII	Room IX	Room X	Room XI	
	Domestic	Domestic	Domestic	Domestic	Domestic	
	Telecommunications	Telecommunications, Control Systems	Power Systems	Power Systems	Power Systems	
	099	030	005	020	039	
	100	033	021	043	041	
	026	074	048	073	089	
	037	079	054	083	090	
	050	097	121	085	091	

Time	Room I		Room II		Room III		Room IV		Room V		Room VI	
	International		International		International		Domestic		Domestic		Domestic	
Parallel Session II 15.30 – 17.00 WIB	Computer and Telematics		Electronics, Telecommunications		Power Systems, Control Systems		Computer and Telematics		Computer and Telematics, Electronics		Electronics, Telecommunications	
	103		067		044		034		036		112	
	106		070		077		040		052		119	
	107		071		084		078		126		120	
	126		116		096		098		109		015	
			124		102		123		110		025	
	Room VII		Room VIII		Room IX		Room X		Room XI			
	Domestic		Domestic		Domestic		Domestic		Domestic			
	Telecommunications		Telecommunications, Control Systems		Power Systems		Power Systems		Power Systems, Control Systems, Electronics			
	065		108		076		086		114			
	068		122		075		093		024			
	069		047		088		111		115			
	072		049		092		127		053			
	022		101		113		087		056			

GUIDELINES OF PRESENTATION

1. Presentation must be in Bahasa Indonesia or English, but for international session, presentation must be in English.
2. Presenter must prepare his/her presentation in Microsoft Power Point file (*.ppt or *.pptx).
3. Presentation file must be submitted to Organizing Committee before starting presentation.
4. Each paper must be presented by one presenter only. If presenter would like to delegate another person to present his/her paper, he/she must contact the Organizing Committee first.
5. Presenter must use laptop provided by the Organizing Committee.
6. Each presenter will have maximum 15 minutes for presenting his/her presentation, including discussion time. The allocated time may vary depending on room capacity.
7. Organizing Committee may cut presentation or discussion when it exceeds the allocated presentation time.



LIST OF CONTENTS

Preface	iv
Schedule of SITIA 2012.....	v
Schedule of Presentation Session	vi
Guidelines of Presentation.....	viii
Guidelines for Posters	ix
List of Contents.....	x
List of Papers	xi
Proceedings	
Chapter I. Computer Engineering & Telematics	1
Chapter II. Electronics	13
Chapter III. Power Systems.....	25
Chapter IV. Telecommunications	41
Chapter V. Control Systems	57
Index of Authors	69

Mochamad Susantok, Wirawan, Achmad Affandi

PAPER ID : 069

Restorasi Citra Rontgen Menggunakan Blind Deconvolution Seddara
Sungging Haryo, Dwi Aftika, Apriani Kusumawardhani

50

PAPER ID : 070

Gain Characteristic in L-Band EDFA
Amalia Santhika, Ary Syahriar

50

PAPER ID : 071

Threshold Pump Power In L-Band EDFA
Amalia Santhika, Ary Syahriar

51

PAPER ID : 072

Aplikasi Kompresi Data Audio Menggunakan Algoritma PPM (*Prediction by Partial Matching*)
Luthfi Aulia Rahman, Agustinus Bimo Gumelar, Meidya Koeshardianto, Eza Rahmanita

51

PAPER ID : 074

Deteksi Non-Gaussian pada Sinyal Gamelan untuk Independent Component Analysis (ICA)
Atik Wintarti, Yoyon K. Suprpto

52

PAPER ID : 079

Desain Artificial Neural Network Ensembles pada Sistem Pengendalian Suhu (Studi Kasus : Pengendalian Suhu *Water Heater*)
Alvin Sahroni, Yayan Iscahyadi S.

52

PAPER ID : 097

Development of Optical Component Analyzer (OCA) System for Characterization of Passive Optical Component
Rionda Bramanta Kuntaraco, Bambang Widiyatmoko, Sekartedjo

53

PAPER ID : 099

Membangun Sistem Entry Data Survey Arus Barang Berbasis Mobile Menggunakan Framework Becak MVC Dan JQuery Mobile
Muhammad Ulir Rifky, Chairul Anam

53

PAPER ID : 100

Pengembangan Aplikasi Absensi Berbasis N-Tier dengan Framework Becak
Puji Agustian A. Widodo, Eko Heri Susanto

54

PAPER ID : 108

Teknik Manajemen Jaringan pada Distribusi Layanan Informasi dan Komunikasi

54

Paper ID: 069

Restorasi Citra Rontgen Menggunakan *Blind Deconvolution* Seddara

Sungging Haryo¹⁾, Dwi Aftika²⁾, Apriani Kusumawardhani³⁾

^{1,2,3)}Jurusan Teknik Fisika ITS, Surabaya 60111
email : ¹⁾sapibuntek@yahoo.com, ²⁾daftika@yahoo.com, ³⁾apri@ep.its.ac.id

Abstrak - Algoritma pemrosesan citra digital dikembangkan untuk pengolahan citra blur dari citra yang didapatkan dari pencitraan rontgen menggunakan metode *Blind Deconvolution Self Deconvolving Data Reconstruction Algorithm* (SeDDaRa). Sampel citra didapatkan dari citra rontgen yang merupakan citra dari tulang kemaluan. Hasil citra rontgen yang terdegradasi akibat *Point Spread Function* (PSF) direstorasi dengan menentukan parameter α (α) secara independent frequency dari 0 sampai 1. Proses restorasi citra dilakukan dalam domain frekuensi sehingga citra kabur dari rontgen ditransformasi menjadi sinyal frekuensi melalui *Fast Fourier Transform* (FFT). Setelah itu dapat dilakukan proses restorasi menggunakan algoritma SeDDaRa. Hasil optimal untuk citra terestorasi didapatkan saat parameter tuning $\alpha=0.3$.

Kata kunci : *Blind Deconvolution*, SeDDaRa, *Poin Spread Function*, FFT, Parameter α .

Paper ID: 070

Gain Characteristic in L-Band EDFA

Amalia Santhika¹⁾, Ary Syahriar²⁾

¹⁾Department of Electrical Engineering, Faculty of Science and Technology Universitas Al Azhar Indonesia. Kompleks Masjid Agung Al Azhar Jl Sisingamangaraja Jakarta, Indonesia
email:santhikaa@gmail.com

²⁾Agency for the Assessment and Application of Technology, Jln. MH. Thamrin, Jakarta 10340, Indonesia, email: ary@uai.ac.id

Abstract – An EDFA consists of a short length of optical fiber which has been doped by certain amount of the rare earth element erbium to the glass in the form of ion Er^{3+} . The erbium atom has a metastable state with remarkable long lifetime of about 10 ms. EDFAs consist of an erbium doped fiber, WDM coupler, and a pump light source. The laser pump light (980 nm) is combined with the input signal by using the WDM coupler. There are bands in the third transmission window, C-band (1525 nm – 1560 nm), and the Long, or L-band (1560 nm to 1640 nm)[2]. These new L-band amplifiers will be essential to enable enabling for future lightwave communication systems operating in what has come to be called the fourth generation telecommunications window. In this paper the analysis on gain characteristic with variations of pump power, fiber length, signal power and signal wavelength of L-Band EDFA has been explored. It is found that the gain is really depends on pump power and signal power strength. The analysis have been performed by solving the amplifiers coupled equation using the fourth Runge-Kutta integration scheme.

Keywords : Telecommunication, Optic, Amplification, EDFA, Erbium, L-Band.

Gain Characteristic in L-Band EDFA

Amalia Santhika¹⁾ Ary Syahriar²⁾

¹⁾Department of Electrical Engineering, Faculty of Science and Technology Universitas Al Azhar Indonesia. Kompleks Masjid Agung Al Azhar Jl Sisingamangaraja Jakarta, Indonesia email: santhikaa@gmail.com

²⁾Agency for the Assessment and Application of Technology, Jln. MH. Thamrin, Jakarta 10340, Indonesia, email: ary@uai.ac.id

Abstract – An EDFA consists of a short length of optical fiber which has been doped by certain amount of the rare earth element erbium to the glass in the form of ion Er^{3+} . The erbium atom has a metastable state with remarkable long lifetime of about 10 ms. EDFAs consist of an erbium doped fiber, WDM coupler, and a pump light source. The laser pump light (980 nm) is combined with the input signal by using the WDM coupler. There are bands in the third transmission window, C-band (1525 nm – 1560 nm), and the Long, or L-band (1560 nm to 1640 nm)[2]. These new L-band amplifiers will be essential to enable enabling for future lightwave communication systems operating in what has come to be called the fourth generation telecommunications window. In this paper the analysis on gain characteristic with variations of pump power, fiber length, signal power and signal wavelength of L-Band EDFA has been explored. It is found that the gain is really depends on pump power and signal power strength. The analysis have been performed by solving the amplifiers coupled equation using the fourth Runge-Kutta integration scheme.

Keywords: Telecommunication, Optic, Amplification, EDFA, Erbium, L-Band.

1. INTRODUCTION

One of the greatest benefits of fiber optic communication is the ability to send thousands of signals through one fiber, while copper wire only allows the transmission of one signal at a time. Development of fibers and devices for optical communication began in the 1970s, with low enough attenuation for communication purposes (about 20 dB/km). An optical communication system is a method of transmitting information from one place to another by sending pulses of light through an optical fiber [1].

In optical transmission systems, there are losses when moving through the fiber optic signal. The loss value is about 0,22 dB/km. After several kilometres along a fiber, the optical signal can become very weak. To amplify the optical signal, the amplification is used by optical amplifier.

An optical amplifier is a device that amplifies an optical signal directly, without the need to first convert it to an electrical signal. Optical Amplifiers are important in optical communications. There are many types of optical amplifier, there is EDFA (Erbium Doped Fiber Amplifier), Semiconductor Optical Amplifier (SOA), Raman amplifier, etc. In this paper, we will discuss about the L-Band EDFA and its gain characteristic.

An EDFA consists of a short length of optical fiber which has been doping by certain amount of the rare earth element erbium to the glass in the form of ion Er^{3+} . The fiber core consists of glass material such as SiO_2 and GeO_2 . Rare earth ions like Er is doped into the core. The cladding material is mainly SiO_2 . The erbium atom has a metastable state with remarkable long lifetime of about 10 ms. An EDFA is constructed by fusion splicing discrete fiber components. It consist of an erbium doped fiber, WDM coupler, and a pump light source. EDFAs have been succesfully in WDM transmission system as optical amplifier to boost the optical signal at the point in the transmission line.

The pump source used a diode laser with appropriate wavelength. The laser pump light is combined with the input signal by using the WDM coupler. WDM Coupler is a optical device that combines two-wavelength lights at certain wavelength. Both the light entering through a different fiber and exits at the same single fiber.

Two bands have developed in the third transmission window – the Conventional, or C-band, from approximately 1525 nm – 1560 nm, and the Long, or L-band, from approximately 1560 nm to 1640 nm[2]. Both of these bands can be amplified by EDFAs, but it is normal to use two different amplifiers, each optimized for one of the bands. These new L-band amplifiers will be essential enabling components for future lightwave communication systems operating in what has come to be called the fourth generation telecommunications window.

2. THEORITICAL BACKGROUND

Three-level rate equation system is a mathematical solutions approach to the behavior of erbium are

reviewed from three levels of energy. In order to understand the workings of this EDFA see diagram level energy and the various processes of transition of Er^{3+} ions in a simplified Silica by taking the bottom three of the energy level structure of Er^{3+} is shown by Fig. 1. As the concept of an atomic energy level is always comprised of : (a) Ground-state (stable state) is labeled by 1; (b) Metastable state labeled by 2; (c) Unstable state labeled by 3.

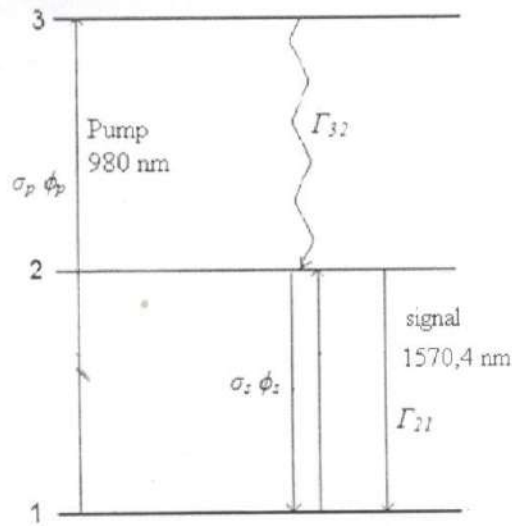


Fig. 1. Three level systems for amplification EDFA model.[10]

In three level system like Er^{3+} pumped at 980 nm, the lower level of the stimulated emission transition corresponds to the ground state[5]. To obtain gain, more than half of the ions must be in the excited states. High pump power are needed to perform the inversion since any portion of the fiber that remains uninverted will act as an absorber at the signal wavelength. In the case of Er^{3+} , the fast non-radiative decay to the level allows this system to be treated like a two-level system.

At level 2, the erbium ions have a long lifetime and this is one of the advantage in optical amplifier system. Level 2 is an amplification of transition, and level 1 is the lowest energy level (ground state). Three-level system is expected to illustrate parts of the structure of energy levels Er^{3+} relevant to the amplification process. Amplification in the EDFA can occur if there is a population inversion between level 1 and level 2, and at least half of the whole population erbium ions must be excited at level 2 and there is need for a pump power threshold for the occurrence of amplification.

In Fig. 1 W_s or $(\sigma_s \phi_s)$ and W_p or $(\sigma_p \phi_p)$ are the rates for the stimulated transitions while Γ_{32} and Γ_{21} are the rates for the spontaneous emissions. Γ_{32} is assumed to be essentially nonradiative and Γ_{21} essentially radiative.[7]

Fig. 2 illustrate absorption and emission cross-section of erbium in wavelength range about 1500 nm to 1640 nm. In this final project, the author using L-Band range, which range between 1560 nm to 1640 nm. It can be seen that this cross-section decays monotonically with the increase of wavelength when it is greater than 1560nm. This in turns means that the gain of the EDFA also decreases accordingly in the L-band

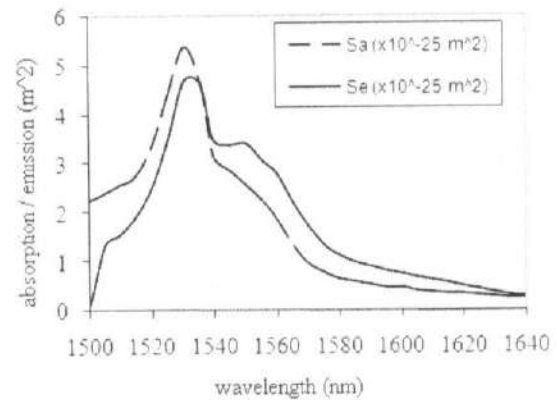


Fig. 2. Absorbtion and emission cross section EDFA[2]

To get more practical formulation we consider the intrinsic background loss that may occur in the Erbium Doped Fiber (may caused by the imperfect material of fiber, the contamination of other material, etc)[6]. The signal and pump field propagation in term of power light field are defined as

$$\frac{dP_s}{dz} = (N_2 \sigma_s^{(e)} - N_1 \sigma_s^{(a)}) \Gamma_s P_s - \alpha_s P_s \quad (1)$$

$$\frac{dP_p}{dz} = (N_2 \sigma_p^{(e)} - N_1 \sigma_p^{(a)}) \Gamma_p P_p - \alpha_p P_p \quad (2)$$

Where:

σ_s = signal emission cross section (m^2).

σ_p = pump absorbtion cross section (m^2).

N_1 = population of erbium ions at Level 1 (m^{-3})

N_2 = population of erbium ions at Level 2 (m^{-3})

Γ_s = spontaneous transition rate from signal

Γ_p = spontaneous transition rate from pump

P_s = signal power

P_p = pump power

α_s = losses from signal

α_p = losses from pump

The value of gain is expressed in the equation below

$$G(\text{dB}) = 10 \log_{10} \frac{P_{sout}}{P_{sin}} \quad (3)$$

Where:

G = gain (dB)

P_{sout} = signal output power (watt)

P_{sin} = signal input power (watt)

3. RESULTS AND DISCUSSIONS

Purpose of this section is to evaluate the gain characteristic to the input pump power and input signal power from the variation of signal power and pump power with 30 meters amplifier length. Measurements and calculations obtained at a wavelength of a predetermined input signal is 1570.4 nm

Gain To Input Pump Power

Characteristic of the EDFA at a wavelength of 1570.4 nm for the variation of the input signal power respectively -20 dBm (0.010 mW), -15 dBm (0.032 mW), -10 dBm (0.100 mW) and -5 dBm (0.316 mW) with 30 meters amplifier length. The gain characteristic results are shown in Fig 3.

Fig.3 as the solution of the Eq.(2) and Eq.(3). It shows that if we using more input pump power we will get higher gain. And for variant signal input power, we will see that we get higher gain if we using the smaller signal input power, because it has entered the saturation region. This effect is known as gain saturation as the signal level increases, the amplifier saturates and cannot produce any more output power, and therefore the gain reduces[4]. Saturation is also commonly known as gain compression.

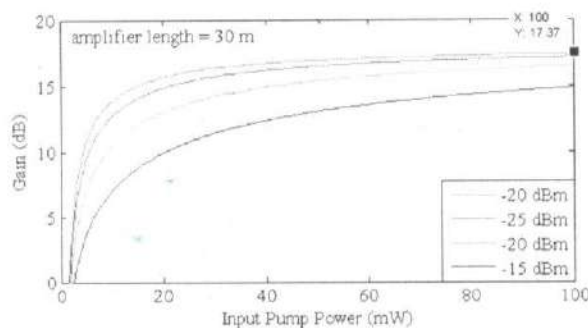


Fig. 3. characteristic of gain EDFA, variations of signal power

We can see when the fiber length 30 meters, we get

17,37 dB gain for the 100 mW input pump power. we can also see that there is a significant increase in gain before entering the saturation region is about 5 mW input pump power.

Gain To Input Signal Power

This figure below is show the gain characteristic to the input signal power from the variation of pump power with a constant length. The variation of the input pump power respectively 60 mW, 50 mW, 40 mW, and 30 mW with 30 meters amplifier length. The gain characteristic results are shown in the fig. 4.

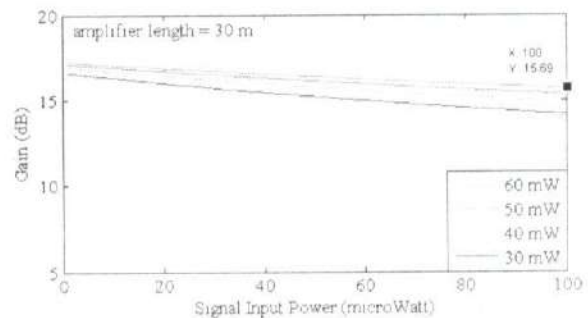


Fig. 4. The gain characteristic of EDFA, variations of pump power

Fig.4 as the solution of the Eq.(1) and Eq.(3). It shows that if we are using more signal input power we will get smaller gain. This can happen because there is more number of photons that excited to the upper state if we give more pump power.

The gain increase after reach the threshold power, minimum pump power required to make the inversion. The increasing is exponentially with pump power, but the increasing become much smaller after trough the saturation regime of pump power. We can see when the fiber length 30 meters, we get 15.69 dB gain for the 100 μ W input signal power.

Gain L-Band With Different Power Signal

Characteristic of the EDFA at a range signal wavelength of 1560 nm to 1640 nm for the variation of the input signal power respectively -20 dBm (0.010 mW), -15 dBm (0.032 mW), -10 dBm (0.100 mW) and -5 dBm (0.316 mW). The gain characteristic results are shown in Fig 5.

In this figure we can be seen that the gain characteristic follows the characteristic of emission and absorption cross section in Fig. 2 for the range of L-Band signal wavelength 1560 nm to 1640 nm.

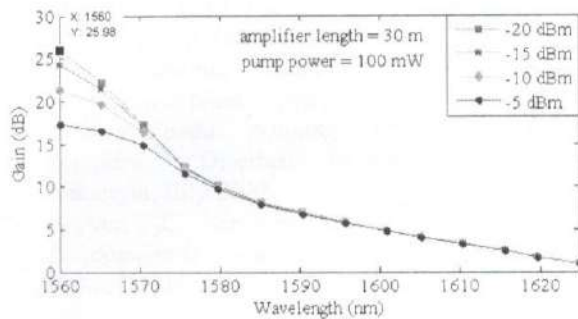


Fig. 5. The gain characteristic of EDFA, variations of signal power with 30 meters length and 100 mW pump power

Fig. 5. Shows the measured gain spectrum of the L-band amplifier. We define the measured gain by the equation (3). Where P_{out} is the output power measured from the doped core of the dual-core fiber with pump laser operating at 980nm and P_{in} is the input power[3]. We can be seen also that there was a significant difference between 1560 nm to 1570 nm. After that, there is no significant difference occurred until at 1640 nm signal wavelength. It also shows that if we using more input pump power we will get higher gain. The figure also shows that we get higher gain if we using the smaller signal input power.

The best gain with different signal power in range of L-Band is reach if we use signal wavelength at 1560 nm. When using -20 dBm or 0.010 mW for signal input power and 100 mW pump power and 30 meters fiber amplifier length.

Gain L-Band With Different Pump Power

Characteristic of the EDFA at a range signal wavelength of 1560 nm to 1640 nm for the variation of the length respectively 60 mW, 50 mW, 40 mW, 30 mW. The gain characteristic results are shown in the Fig. 6.

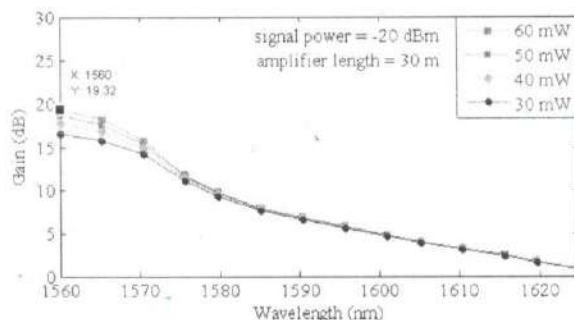


Fig. 6. The gain characteristic of EDFA, variations of signal power with 30 meters length and -20 dB signal power

It shows the measured gain characteristic of the L-band amplifier for different pump power settings with a fiber length of 30 meters. It can be seen that if the pump power decreases, the gain also decreases. Rate of stimulated absorption of the signal $\sigma_s^{(a)}$ is greater than the rate of absorption of the pump $\sigma_p^{(a)}$, ion

population resulted in the level2 decreased with increasing photon flux signal ϕ_s . photon flux signal ϕ_s is directly proportional to the signal power P_s . Increase in signal power P_s with a fixed pump power resulted in decreased gain.[3]

We can be seen also that there was a significant difference between 1560 nm to 1570 nm. After that, there is no significant difference occurred until at 1640 nm signal wavelength. In this figure we can be seen that the gain characteristic follows the characteristic of emission and absorption cross section in Fig. 2 for the range of L-Band signal wavelength 1560 nm to 1640 nm.

The best gain with different pump power in range of L-Band is reach if we using signal wavelength at 1560 nm. When using -20 dBm or 0.010 mW for signal input power and 60 mW pump power and 30 meters fiber amplifier length.

4. CONCLUSION

The simulation is based on the the three level atomic system theory to investigate the amplification process in EDFA. Based on the simulation and analysis. We can conclude that:

EDFA have higher gain if using more input pump power and smaller signal input power. From the simulation, the best gain at 1570,4 nm is about 17,37 dBm. With 30 meters optical amplifier, 100 mW pump power, -20 dBm power signal.

In range L-Band, the optimum gain at 1560 nm signal wavelength is 25,98 dB. With 30 meters optical amplifier, 100 mW Pp, -20 dBm Ps.

REFERENCES

- [1] David R. Smith, "Digital transmission systems". Kluwer International Publishers, 2003.
- [2] Lu, Yi-Bin. "A gain-flattened L-band dual-core erbium-doped fibre amplifier". Elsevier Science Publisher. Hong Kong. February 2003.
- [3] Mujadin, Anwar. "Rancang bangun sistem penguatan optik Erbium Doped Fiber Amplifier (EDFA) pada rentang panjang gelombang L-Band". Tesis Universitas Indonesia. 2011.
- [4] Nur Samijayani, Octarina. "Comparative analysis of 980 nm and 1480 nm pumping scheme on C-Band EDFA using 1530 nm signal wavelength". Final project Universitas Al Azhar Indonesia. 2009.
- [5] Flood, F.A. "980-nm pump-band wavelengths for long-wavelength-band erbium-doped fiber

amplifiers". IEEE Photonics Technology Letters, vol. 11, no. 10, October 1999.

- [6] Hadi Pramono, Soleh. "*Metode perataan penguatan erbium doped fiber amplifier (EDFA) C-Band pada panjang gelombang ITU-Standard*". Disertasi Doktoral Universitas Indonesia. July 2009.
- [7] Becker, P.C. "*Erbium Doped Fiber Amplifiers: Fundamentals and Technology*". Academic Press. London. 1999.