



# CERTIFICATE

01 / CRF / SITIA / 12 / V / 2012

this is to certify that

**ARY SYAHRIAR**

has participated on

**13<sup>th</sup> SEMINAR ON INTELLIGENT TECHNOLOGY**

**AND ITS APPLICATIONS**

as

**presenter**

paper title

**Thermo-Optic Effects on Silica Based Microring  
Resonator (MRR).**

**Gain Characteristic in L-Band EDFA Threshold Pump  
Power in L-Band EDFA**

Surabaya, May 23<sup>rd</sup> 2012  
General Chairman SITIA 2012

Dr. Heri Suryatmojo, ST., MT.  
NIP. 198006032006041003



**SITIA 2012**  
13<sup>th</sup> Seminar on Intelligent Technology  
and Its Applications

May 23<sup>rd</sup> 2012

at AJ Building, Dept. of Electrical Engineering Campus,  
Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia



# Proceeding

ISSN : 2252-8296

Volume 13

Abstract Proceeding Edition

May 23<sup>rd</sup> 2012

at AJ's Building.

Dept. of Electrical Engineering Campus.

Institut Teknologi Sepuluh Nopember.

Surabaya, Indonesia.



11<sup>th</sup> Seminar on Intelligent Techn  
6<sup>th</sup> International Conference





The 13<sup>th</sup> Seminar on Intelligent Technology and Its Applications  
ISSN : 2252-8296

## PUBLISHED BY

Electrical Engineering Department

Faculty of Industrial Technology

Institut Teknologi Sepuluh Nopember (ITS)

Campus ITS, Keputih, Sukolilo

Surabaya 60111

ISSN 2252-8296

The 13<sup>th</sup> Seminar on Intelligent Technology and Its Applications

Copyright © 2012 by Electrical Engineering Department, Institut Teknologi Sepuluh Nopember

All rights reserved. No part of this book, may be reproduced, stored, or transmitted, in any forms or by any means without the prior permission in writing from the publisher.

May 23<sup>rd</sup> 2012

at AJ's Building, Dept. of Electrical Engineering Campus,  
Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia





# PROCEEDINGS OF THE 13<sup>TH</sup> SEMINAR ON INTELLIGENT TECHNOLOGY AND ITS APPLICATIONS

## EDITOR-IN-CHIEF

Dr. Heri Suryoatmojo  
E-mail : suryomgt@ee.its.ac.id

## SECRETARY

Dr. Achmad Mauludiyanto  
E-mail : maulud@ee.its.ac.id

## EDITORIAL COORDINATORS

### Telematics

I Ketut Eddy Purnama, ST., MT., Ph.D  
E-mail : ketut@ee.its.ac.id  
Muhtadin, ST., MT.  
E-mail : muhtadin\_s@elect-eng.its.ac.id

### Telecommunication

Dr. Achmad Mauludiyanto  
E-mail : maulud@ee.its.ac.id  
Devy Kuswidiastuti, ST., M.Sc.  
E-mail : devy@ee.its.ac.id

### Electronics and Instrumentation

Dr. Achmad Arifin  
E-mail : arifin@ee.its.ac.id  
Ir. Totok Mujiono, MI.Kom  
E-mail : totok\_m@ee.its.ac.id

### Control System

Dr. Ir. M. Rameli  
E-mail : rameli@ee.its.ac.id  
Imam Arifin, ST., MT.  
E-mail : arifin-i@ee.its.ac.id

### Power System

Dr. Dedet Chandra Riawan  
E-mail : dedet@ee.its.ac.id  
Vita Lystianingrum Budiharto Putri, ST., M.Sc  
E-mail : vita@ee.its.ac.id

## EDITORIAL ADVISORY BOARD

Dr. Tri Arief Sardjono, ST., MT.  
Head of Department of Electrical Engineering  
Institut Teknologi Sepuluh Nopember (ITS), Surabaya  
E-mail : t.a.sardjono@ee.its.ac.id -

SITIA's Proceeding is published once every year



## COMMITTEE OF SITIA 2012

### Honorary Chairman:

Prof. Dr. Ir. Triyogi Yuwono, DEA  
Rector of Institut Teknologi Sepuluh Nopember (ITS)

### General Chairman:

Dr. Heri Suryoatmojo

### Technical Committee:

Prof. Dr. Mohammad Nuh (ITS),  
Prof. Dr. Soebagio (ITS),  
Prof. Dr. Ontoseno Penangsang (ITS),  
Prof. Dr. Mauridhi Hery Purnomo (ITS),  
Prof. Dr. Abdullah Alkaff (ITS),  
Prof. Dr. Achmad Jazidie (ITS),  
Prof. Dr. Moh. Ashari (ITS),  
Prof. Dr. Imam Robandi (ITS),  
Prof. Dr. Adi Soeprijanto (ITS),  
Prof. Dr. Gamantyo Hendratoro (ITS),  
Prof. Dr. Ir. G.J. Verkerke (Groningen, Netherlands),  
Prof. Dr. Tsuyoshi Usagawa (Kumamoto University, Japan),  
Prof. Dr. Takeshi Hiyama (Kumamoto University, Japan),  
Prof. Dr. Akira Matsushita (Kumamoto University, Japan),  
Prof. Dr. T. Nakamoto (Tokyo Institute of Technology, Japan)  
Dr. Adel Elbaset (Minia University, Egypt)  
Dr. Engin Karatepe (Ege University, Turkey)  
Dr. Ir. M.H.F. Wilkinson (Groningen, Netherlands),

Dr. I Ketut Eddy Purnama (ITS),  
Dr. M. Rameli (ITS),  
Dr. Wirawan (ITS),  
Dr. Ari Santoso (ITS),  
Dr. Djoko Purwanto (ITS),  
Dr. Achmad Affandi (ITS),  
Dr. Achmad Arifin (ITS),  
Dr. M. Rivai (ITS),  
Dr. Moch. Hariadi (ITS),  
Dr. Tri Arief Sarjono (ITS),  
Dr. Yoyon K. Suprpto (ITS),  
Dr. Achmad Mauludiyanto (ITS),  
Dr. Dedet Chandra Riawan (ITS),  
Dr. Titon Nugroho (ITS),  
Dr. Ardyono P. (ITS),  
Dr. Suwadi (ITS),  
Dr. Trihastuti Agustinah (ITS),  
Dr. Dadet Pramadihanto (ITS),  
Dr. Son Kuswadi (ITS),  
Dr. Endra Pitowarno (ITS),  
Dr. Agus Zaenal Arifin (ITS)  
Dr. Rony Seto(ITS)

### Organizing Committee:

Immanuel Natanael R.	Febrila Lupita	Aldhimas	Aufar Gusviandi P.
Alfina Zussida	Gilang Sholeh A.	Ni Wayan	Pungki Priambodo
Nezya Nabila	Debby P. T.	Ahmad Rifai	Faradhiba Rezqi
Siti Aisyah	Iyoka Cininta P.	Chairul Rizal	Nurdiansyah P.
Annisa Riani Sabila	Rosyid Hadi N.	Verdie Feryawan	Chyntia Ayuning P.
Dwi Didit P.	Bayu P. W.	Rizky Adam A.	Armando A. G. Sihite
Cinderella Gana	Diah Kusumawati	Bagas Prasetya	Fakhrudin Azhar
Arda	Hosyi'ah Rusdiana	Arie Arifin	Atya Mahatmya
Nicolaus Radian Putra	Yusro	Luvy Arfendi P.	Ersha Okta R.
Weta Harry W.	Denny Novian M.	Gary Almas	Vivin Violita
Shandy Baskoro	Iskandar D.	Brilyan Muhammad	Agus Lesmana
Raymond Sinaga	Fadil Muhammad	Arnoldus Gerry S.	Randy Immanuel S.
Charisma Vian	Destina Surya	M. Syaiful Arif	Amin D. N.
Rosita Elvina	Herlambang Setiadi	Antonius Aryo W.	Evi Rahmawati





## PREFACE

Dear Colleagues,

On behalf of Technical Program Committee and Organizing Committee of SITIA 2012, I am honored to welcome you to *the 13<sup>th</sup> Seminar on Intelligent Technology and Its Applications (SITIA)*. This annual seminar is organized by **Electrical Engineering Departement, Institut Teknologi Sepuluh Nopember (ITS) Surabaya**. The objective of this seminar is to promote the fruitful growth of researches in various fields in Electrical Engineering and its related fields presented in international oral presentation, domestic oral presentation, and poster presentation. This seminar also provides forum for researchers, scientist, and engineers to exchange ideas and their current achievements.

This year we have received **127 paper submissions** from universities, research centers, and industries, the Technical Program Committee accepted **107 selected papers** that should be presented in this seminar. The accepted papers are categorized into five groups; **Computer Engineering and Telematics, Electronics, Power Systems, Telecommunications and Control Systems**. This number the continues attraction on this seminar as an important forum. The quality of papers increased year by year.

At last, the success of this seminar is due to the hard effort of many people especially students of Electrical Engineering Departement of ITS which we gratefully acknowledge. We thank also to the authors whose papers are presented, the invited keynote speakers, and all parties that we are not able to mention here.

We wish you all can enjoy one day discussion through this seminar and could spend to enjoy the beauties of Surabaya City and ITS-Campus. We hope to meet you again in the next seminar, the 14<sup>th</sup> Seminar on Intelligent Technology and Its Application 2013.

Surabaya, May 23<sup>rd</sup> 2012

General Chairman of SITIA 2012

A handwritten signature in black ink, appearing to read 'Dr. Heri Suryoatmojo', written over a faint circular stamp.

**Dr. Heri Suryoatmojo**

NIP. 198006032006041003



## SCHEDULE OF SITIA 2012

07.30-08.00	Registration
08.00-08.05	Welcome Speech by MC
08.05-08.15	Opening Ceremony
08.15-08.20	Welcome Speech : General Chairman of SITIA 2012 <b>Dr. Heri Suryoatmojo</b>
08.20-08.30	Welcome Speech: Head of Electrical Engineering Department, ITS <b>Dr. Tri Arief Sardjono, ST., MT.</b>
08.30-08.40	Welcome Speech : Rector of ITS <b>Prof. Dr. Ir. Triyogi Yuwono, DEA</b>
08.40-09.15	1 <sup>st</sup> Keynote Speaker:
	<b>Prof. Han Shik Chung</b> (Gyeongsang National University, Korea)
	Discussion
09.15-09.50	2 <sup>nd</sup> Keynote Speaker :
	<b>Prof. Er Meng Joo</b> (Nanyang Technology University, Singapore)
	Discussion
09.50-10.10	Break
10.10-10.40	3 <sup>rd</sup> Keynote Speaker :
	<b>Dr. Dedet Candra Riawan, ST., M.Eng.</b> (Institut Teknologi Sepuluh Nopember - Indonesia)
	Discussion
10.40-12.25	Poster Session
12.25-13.00	Lunch Break & Pray
13.00-15.00	<b>Parallel Session I</b>
15.00-15.30	Break II
15.30-17.00	<b>Parallel Session II</b>
17.00-17.15	Closing Ceremony





SCHEDULE OF PRESENTATION SESSION

Time	Room I	Room II	Room III	Room IV	Room V	Room VI
	International Computer and Telematics	International Electronics, Telecommunications	International Power Systems, Control Systems	Domestic Computer and Telematics	Domestic Computer and Telematics, Electronics	Domestic Electronics, Telecommunications
Parallel Session I 13.00 - 15.00 WIB	001	027	014	003	009	004
	031	038	032	013	010	006
	035	046	057	016	011	007
	094	052	060	017	018	055
	012		045	019	028	105
	Room VII	Room VIII	Room IX	Room X	Room XI	
	Domestic	Domestic	Domestic	Domestic	Domestic	
	Telecommunications	Telecommunications, Control Systems	Power Systems	Power Systems	Power Systems	
	099	030	005	020	039	
	100	033	021	043	041	
	026	074	048	073	089	
037	079	054	083	090		
050	097	121	085	091		



Time	Room I	Room II	Room III	Room IV	Room V	Room VI
	International Computer and Telematics	International Electronics, Telecommunications	International Power Systems, Control Systems	Domestic Computer and Telematics	Domestic Computer and Telematics, Electronics	Domestic Electronics, Telecommunications
<b>Parallel Session II 15.30 – 17.00 WIB</b>	103	067	044	034	036	112
	106	070	077	040	052	119
	107	071	084	078	126	120
	126	116	096	098	109	015
		124	102	123	110	025
	Room VII	Room VIII	Room IX	Room X	Room XI	
	Domestic Telecommunications	Domestic Telecommunications, Control Systems	Domestic Power Systems	Domestic Power Systems	Domestic Power Systems, Control Systems, Electronics	
	065	108	076	086	114	
	068	122	075	093	024	
	069	047	088	111	115	
	072	049	092	127	053	
022	101	113	087	056		



## GUIDELINES OF PRESENTATION

1. Presentation must be in Bahasa Indonesia or English, but for international session, presentation must be in English.
2. Presenter must prepare his/her presentation in Microsoft Power Point file (\*.ppt or \*.pptx).
3. Presentation file must be submitted to Organizing Committee before starting presentation.
4. Each paper must be presented by one presenter only. If presenter would like to delegate another person to present his/her paper, he/she must contact the Organizing Committee first.
5. Presenter must use laptop provided by the Organizing Committee.
6. Each presenter will have maximum 15 minutes for presenting his/her presentation, including discussion time. The allocated time may vary depending on room capacity.
7. Organizing Committee may cut presentation or discussion when it exceeds the allocated presentation time.





## LIST OF CONTENTS

Preface .....	iv
Schedule of SITIA 2012.....	v
Schedule of Presentation Session .....	vi
Guidelines of Presentation.....	viii
Guidelines for Posters .....	ix
List of Contents.....	x
List of Papers .....	xi
<b>Proceedings</b>	
Chapter I. Computer Engineering & Telematics .....	1
Chapter II. Electronics .....	13
Chapter III. Power Systems.....	25
Chapter IV. Telecommunications .....	41
Chapter V. Control Systems .....	57
Index of Authors .....	69

May 23<sup>rd</sup> 2012

at AJ's Building, Dept. of Electrical Engineering Campus.  
Institut Teknologi Sepuluh Nopember, Surabaya, Indonesia

Paper ID: 071

## Threshold Pump Power In L-Band EDFA

Amalia Santhika<sup>1)</sup>, Ary Syahriar<sup>2)</sup>

<sup>1)</sup>Department of Electrical Engineering, Faculty of Science and Technology Universitas Al Azhar Indonesia. Komplek Masjid Agung Al Azhar Jl Sisingamangaraja Jakarta, Indonesia, email: santhikaa@gmail.com

<sup>2)</sup>Agency for the Assessment and Application of Technology, Jln. MH. Thamrin, Jakarta 10340, Indonesia, email: ary@uai.ac.id

*Abstract* - Recently, many types of optical amplifier have been designed using fiber optic which has doped by different types of rare earth ions, such as ion of erbium. Each types of rare earth amplifier has different operation region of the signal wavelength. [1]. In this paper we will discuss about threshold pump power value of L band EDFA which shows the minimum requirement of pump power where the amplification start to happen. In the process we solve population inversion coupled equation using fourth order the Runge-Kutta integration scheme. It is found that at different input signals the population inversion population will have different threshold pump powers.

*Keywords:* Optical amplifier, Optic, Amplification, EDFA, Erbium, Rare earth, L-Band.

Paper ID: 072

## Aplikasi Kompresi Data Audio Menggunakan Algoritma PPM (Prediction by Partial Matching)

Luthfi Aulia Rahman<sup>1)</sup>, Agustinus Bimo Gumelar<sup>2)</sup>, Meidya Koeshardianto<sup>3)</sup>, Eza Rahmanita<sup>4)</sup>

Jurusan Teknik Informatika Universitas Trunojoyo Madura, Jl. Raya Telang, PO.BOX.2Kamal, Bangkalan – Madura,

email: <sup>1)</sup>gazella09@yahoo.co.id, <sup>2)</sup>bimogumelar@yahoo.com, <sup>3)</sup>meidya.k@gmail.com, meidya@telkom.net

*Abstrak* – Dalam bidang teknologi informasi, komunikasi data berhubungan erat dengan pengiriman data menggunakan sistem transmisi elektronik dari satu terminal komputer ke terminal komputer yang lain. Besarnya ukuran data terkadang menjadi kendala dalam proses pengiriman data ini. Waktu transfer yang lebih lama dibandingkan dengan data yang memiliki ukuran lebih kecil, terkadang ada resiko tidak dapat tertampung pada media penyimpanan dan tidak tersampainya, sehingga akan memperkecil kapasitas kosong dalam memori media penyimpanan. Penelitian yang dilakukan menunjukkan hasil kompresi data audio dengan algoritma PPM mampu menghasilkan rasio kompresi yang tinggi dan kualitas audio hasil kompresi yang baik. Dari hasil percobaan, dihasilkan penggunaan algoritma PPM untuk kompresi audio memiliki PSNR (Peak Signal to Noise Ratio) tertinggi sebesar 11.70789222 dB dan rasio pemampatan tertinggi mencapai 89.74455 % dengan uji coba 180 file audio.

*Kata Kunci:* Kompresi Data Audio, Algoritma PPM, Lossless.



# Threshold Pump Power In L-Band EDFA

Amalia Santhika<sup>1)</sup> Ary Syahriar<sup>2)</sup>

<sup>1)</sup>Department of Electrical Engineering, Faculty of Science and Technology Universitas Al Azhar Indonesia. Komplek Masjid Agung Al Azhar Jl Sisingamangaraja Jakarta, Indonesia, email: santhikaa@gmail.com

<sup>2)</sup>Agency for the Assessment and Application of Technology, Jln. MH. Thamrin, Jakarta 10340, Indonesia, email: ary@uai.ac.id

**Abstract** - Recently, many types of optical amplifier have been designed using fiber optic which has doped by different types of rare earth ions, such as ion of erbium. Each types of rare earth amplifier has different operation region of the signal wavelength.[4]. In this paper we will discuss about threshold pump power value of L band EDFA which shows the minimum requirement of pump power where the amplification start to happen. In the process we solve population inversion coupled equation using fourth order the Runge-Kutta integration scheme .It is found that at different input signals the population inversion population will have different treshold pump powers.

**Keywords:** Optical amplifier, Optic, Amplification, EDFA, Erbium, Rare earth, L-Band.

## 1.INTRODUCTION

Optical communication is the communication system that using the fiber optic as a transmission medium. Information signal that will be sent has to be converted into light pulse signal before it is already be transmitted trough fiber optic[3]. The transmitter will produce the light that represent the information signal, and then in the receiver the light pulse will be converted back into its original signal of information.

After several kilometres along a fiber, the optical signal can become very weak because there are losses is about 0,22 dB/km. In the optical communication especially for telecommunication application, amplifier was very needed to support better quality of the transmission.

In the development, many types of optical amplifier has been designed using fiber optic which has doped by different types of rare earth ions, such as ion of erbium, ytterbium, neodymium, thulium, praseodymium, holmium etc. Each dopant with different types has different characteristic, and this will very influence the output of the amplified signal. Each types of rare earth amplifier has different operation region of the signal wavelength.[4] In this paper the author focused on L-Band EDFA.

L-band amplifiers will be essential enabling components for future lightwave communication systems operating in what has come to be called the fourth generation telecommunications window. For range 1570 nm to 1640 nm.

This paper the author will discuss about threshold pump power value which shows that the initial amplification will occur and also the signal output power with variations of pump power.

## 2. THEORITICAL BACKGROUND

In the following section, will be explained on  $\text{Er}^{3+}$  ion transition of energy levels  $^4I_{13/2}$  to the energy levels  $^4I_{15/2}$ . capable of providing and strengthening the lasing wavelength of the signal at 1500 nm. Scheme of energy levels in  $\text{Er}^{3+}$  and the resulting of spectrum is shown in Fig.1

Erbium has a very long lifetime at the amplification transition. This fact occurs because the energy gap by erbium between level excited state ( $^4I_{13/2}$ ) dan level ground state ( $^4I_{15/2}$ ) is very large. Its lifetime value is estimated at 10 ms and varies depending on the composition of the main glass and erbium concentration

Characteristics of the atomic structure is necessary in the process of amplification. Transitions can occur because there is separation of the atomic energy levels Erbium configuration. Separation of energy levels in the Erbium ions depicted in Fig. 1. Each  $\text{Er}^{3+}$  energy levels associated with the wavelength region of light absorption and emission.[3] This means that photons with particular wavelengths are absorbed or emitted from a particular state associated with energy levels

The results of absorption measurements of the ion-doping erbium into the fiber and measured at room temperature is shown in Fig. 2.

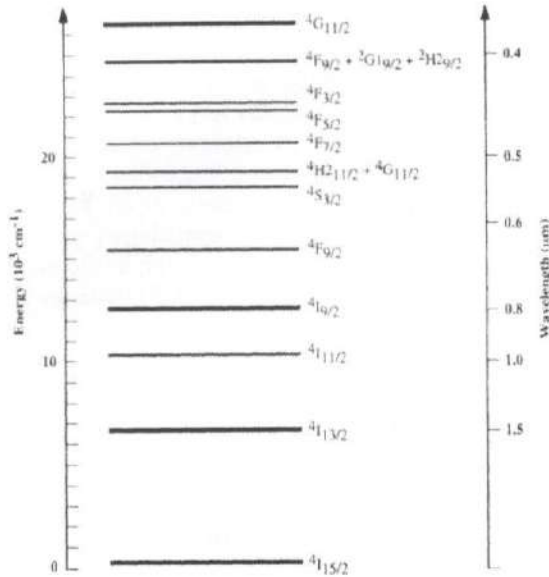


Fig. 1. Energy levels of  $Er^{3+}$  in glass host material [1]

The various peaks correspond to the transition between the ground state and the higher states. The two main pump regions at 1480nm and 980nm are seen to provide significant absorption to obtain better amplification of signal with 1,5μm wavelength. With more absorption means will be more ions are excited to the higher state, it means there is possibility more number of ions will be emitted.

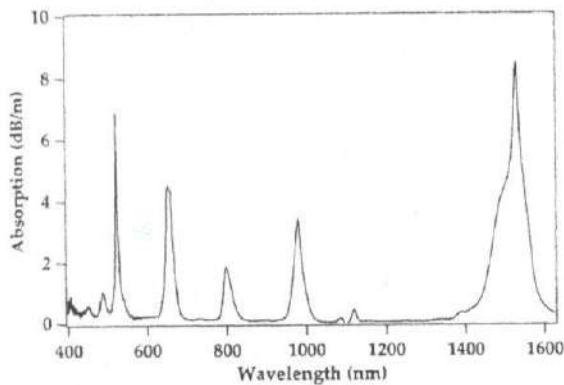


Fig. 2. Absorption spectrum of an  $Er^{3+}$  doped silica fiber [1]

If the population number in ground state is more than the population in the upper state, the incoming signal will be interact more with the population in the ground state, therefore there will be more absorption than stimulated emission. The stimulated emission rate can exceed the absorption only when  $N_2 > N_1$ . [4] This condition is referred as population inversion. This condition means there are more number of ions has excited to higher state, and then it will interact with the signal photons and will be emitted as the stimulated emission [1].

The population in each state will be changed by the

absorption and emission cross section also spontaneous emission. The equations for population rate change in three-level atomic system can be formulated [1] as:

$$\frac{dN_1}{dt} = \Gamma_{21} N_2 - (N_1 - N_3) \sigma_p \phi_p + (N_2 - N_1) \sigma_s \phi_s \quad (1)$$

$$\frac{dN_2}{dt} = -\Gamma_{21} N_2 - (N_2 - N_1) \sigma_s \phi_s + \Gamma_{32} N_3 \quad (2)$$

$$\frac{dN_3}{dt} = -\Gamma_{32} N_3 - (N_3 - N_1) \sigma_p \phi_p \quad (3)$$

Where:

$\phi_p$  is flux intensity of incoming light at a frequency corresponding to the transition level 1 to level 3, or the flux intensity of the pump light, or photon flux input pump.

$\sigma_p$  is pump absorption cross section ( $m^2$ ).

$\phi_s$  is flux intensity of incoming light at a frequency corresponding to the transition level 1 to level 2, the flux intensity of the signal light, or photon flux input signal.

$\sigma_s$  is signal emission cross section ( $m^2$ ).

$\Gamma_{32}$  is spontaneous transition rate from level 3 to level 2, or the probability of transition from level 3 to level 2.

$\Gamma_{21}$  is spontaneous transition rate from level 2 to level 1, or the probability of transition from level 2 to level 1.

In a state of steady-state, the derivative with respect to time for all the problems on each level will be equal to zero.

$$\frac{dN_1}{dt} = \frac{dN_2}{dt} = \frac{dN_3}{dt} = 0 \quad (4)$$

And total population of  $N$  is:

$$N = N_1 + N_2 + N_3 \quad (5)$$

Population of erbium ions at level 3 can be determined from equation (3) and shown in the equation below:

$$N_3 = \frac{1}{1 + \Gamma_{32} / \phi_p \sigma_p} N_1 \quad (6)$$

Using Eq.(5) that substituted in Eq.(6) we obtain:

$$N_2 = \frac{(\phi_p \sigma_p / \Gamma_{32}) + \phi_s \sigma_s}{\Gamma_{21} + \phi_s \sigma_s} N_1 \quad (7)$$

### Pump Power Threshold



The threshold pump power of an optically pumped laser is the value of the pump power for which the laser threshold is just reached. If  $\Gamma_{32}$  has a large value (decay occurs rapidly from level 3 to level 2) compared with a pump rate at level 3 ( $\sigma_p \phi_p$ ), then the value of  $N_3$  is close to zero. This allows for most existing populations in energy levels 1 and 2. The value of the population in  $N_2$  obtained by substituting the equation (7) into the equation (2):[2]

$$N_2 - N_1 = \frac{\phi_p \sigma_p - \Gamma_{21}}{\Gamma_{21} + 2\phi_s \sigma_s + \phi_p \sigma_p} N \quad (8)$$

Eq. (8) shows the state in population inversion, and amplification at the transition level 2 to level 1 (assuming no lossless), where  $N_1 \geq N_2$ . Threshold value of amplification the case for  $N_1 = N_2$ , and generates a statement like in equation (9) for pumping the necessary flux.[5]

$$\phi_{th} = \frac{\Gamma_{21}}{\sigma_p} = \frac{1}{\tau_{21} \sigma_p} = \frac{1}{\tau_2 \sigma_p} \quad (9)$$

where:

$\phi_{th}$  = pump flux threshold

### 3. RESULTS AND DISCUSSIONS

The result of population rate change is to show the number of population on each state as a function of time, that describe the population inversion process inside EDFA.[5] This simulation is based on the two-level atomic system theory, there are population density in state1 (as ground state), and state2 (as the upper state). The population moved from state1 to state2 because the existing pump power with the value that higher than the threshold power.

Fig. 3 shows the relation between the fractional population inversion or  $(N_2 - N_1)/N$  with the pump power with the different input signal power respectively -20 dBm (0.010 mW), -15 dBm (0.032 mW), -10 dBm (0.100 mW) and -5 dBm (0.316 mW) with a constant wavelength of 1570,4 nm.

Fig. 3 as the solution of the Eq.(1) and Eq.(2), shows that the number of population in ground state will be excited to the upper state.

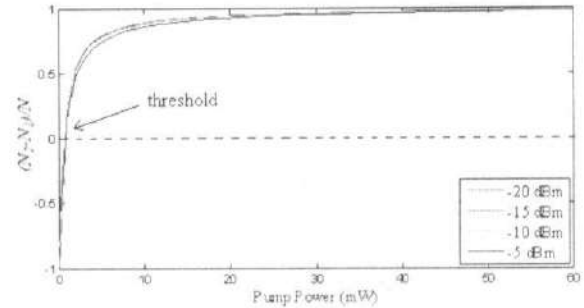


Fig. 3. Fractional inversion population characteristics against power pump with different signal power

This is occurred by the decreasing of the number of population in state1. But as the opposite, the population number of state2 is added, by the movement of some population from state1. The figure shows that all of the population from ground state can be excited to the upper state when use the 980nm pumping wavelength.

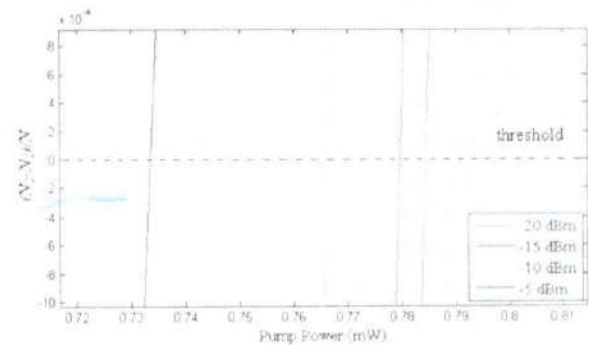


Fig. 4. Threshold value for different signal power

Fig. 4 shows that the threshold value occurs at a signal power of about 0,7844 mW for -20 dBm, and 0,7336 mW for -5 dBm, it shows at the Table 1. We will see that we get higher fractional population inversion if we using the higher signal input power. Threshold value is a value which shows that the initial amplification will occur, and also showed that the number of erbium ions at level 2 equals to the number of erbium ions at level 1. We define the pump power that required getting the zero fractional population inversion as the threshold pump power as plotted.[2]

Table 1. Threshold pump power

Signal Power	Pump Power at Threshold
-20 dBm	0,7844 mW
-15 dBm	0,7797 mW
-10 dBm	0,7664 mW
-5 dBm	0,7336 mW

The value of a population inversion indicates that the ions at the level of the ground state displaced all the excited state level. Increases linearly with pump power giving increase caused population inversion value increased exponentially at a certain pump power limit, and then approached saturation to increase the pump power is higher. Perfect population inversion occurs when the number of erbium ions in state 1 = 0 ( $N_1 = 0$ ), so that  $N_2 = N$ .

### Signal Output Power To Signal Input Power

Purpose of this section is to evaluate the signal output power characteristic to the input signal power from the variation of pump power with the constant length. Measurements and calculations obtained at a wavelength of a predetermined input signal is 1570.4 nm

This figure below show the signal output power to the input signal power from the variation of pump power with the constant length. The variation of the signal input power respectively 60 mW, 50 mW, 40 mW, and 30 mW with 30 meters amplifier length. The signal output power characteristic results are shown in the figure below.

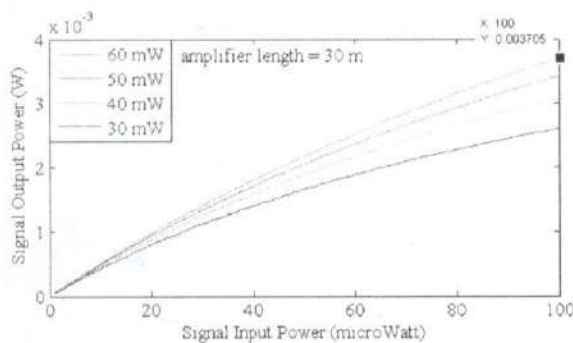


Fig. 5. signal output power characteristic of EDFA, variations of pump power

Fig. 5 we can see the relation between signal output power and signal input power. It shows that if we using more signal input power we will get higher signal output power. This can happen because there is more number of photons that excited to the upper state if we give more pump power.

And for variant input pump power, we will see that we get higher signal output power if we using the higher pump power. In this simulation, we use the 980 nm pump power.

From the figure, can see when the fiber length 30 meters, we get 3.705 mW signal output power for the 100 μW input pump power. we can see that the higher and the best signal output power is reach if we using 30 meters optical amplifier with 100 mW input pump power and with the small pump power is about 60 mW.

### 4. CONCLUSION

Based on the simulation and analysis. We can conclude that:

All of the population from ground state can be excited to the upper state when use the 980nm pumping wavelength

The threshold value occurs at a signal power of about 0,7844 mW for -20 dBm, 0,7797 mW for -15 dBm, 0,7664 mW for -10 dBm 0,7336 mW for -5 dBm. We will see that we get higher fractional population inversion if we using the higher signal input power.

We get higher signal output power if using more signal input, more length, more pump power. The best signal output power is reach if we using 30 meters optical amplifier with 100 mW input pump power and with the small pump power is about 60 mW.

### REFERENCES

- [1] Becker, P.C. "Erbium Doped Fiber Amplifiers: Fundamentals and Technology". Academic Press, London. 1999.
- [2] Hadi Pramono, Soleh. "Metode perataan penguatan erbium doped fiber amplifler (EDFA) C-Band pada panjang gelombang ITU-Standard". Disertasi Doktorat Universitas Indonesia. July 2009.
- [3] E. Desurvire, *Erbium-Doped Fiber Amplifiers: Principles and Applications*. New York: Wiley, 1994.
- [4] Flood, F.A. "980-nm pump-band wavelengths for long-wavelength-band erbium-doped fiber amplifiers". IEEE Photonics Technology Letters, vol. 11, no. 10. October 1999.
- [5] Nur Samijayani, Octarina. "Comparative analysis of 980 nm and 1480 nm pumping scheme on C-Band EDFA using 1530 nm signal wavelength". Final project Universitas Al Azhar Indonesia. 2009.