

CONTENTS

Seismic Behavior of Concrete-Filled Steel Tube (CFST) Column and Reinforced Concrete (RC) Beam Connections under Reversed Cyclic Loading	210301
Ahmed Najm Abdullah, Bambang Budiono, Herlien Dwiarti Setio & Erwin Lim	
The Method of Lines Analysis of TE Mode Propagation in Silica based Optical Directional Couplers	210302
Ary Syahriar, Putri Wulandari, Ahmad Husin Lubis, Retno Wigajatri, Danny M. Gandana & Anwar Mujadin	
Hydrogenated Palm Fatty Acid Distillate as Raw Materials for Magnesium Stearate Alternatives	210303
Abdu Ravi Zakaria, Dwi Rokhmat Setiawan, Shelly Shelly, Melia Laniwati, & Dianika Lestari	
Numerical Simulation of Damage in Sandwich Composite Panels Due to Hydrodynamic Impact	210304
Satrio Wicaksono, Nur Ridhwan Muharram, Hermawan Judawisastra & Tatacipta Dirgantara	
Preparation of Graphene Oxide from Expanded Graphite at Different Microwave Heating Times	210305
Ahmed A Moosa, Zainab H. Mahdi, Mohammed A. Mutar	
Airflow Characteristics Investigation of a Diesel Engine for Different Helical Port Openings and Engine Speeds	210306
Willyanto Anggono, Mitsuhsa Ichianagi, Reina Saito, Gabriel J. Gotama, Chris Cornelius, Ryera Kreshna & Takashi Suzuki	
Identification of Micro-plastic Contamination in Drinking Water Treatment Plants in Phnom Penh, Cambodia	210307
Sandhya Babel & Hakk Dork	
Bayah Natural Zeolites to Upgrade the Quality of Bio Crude Oil from Empty Fruit Bunch Pyrolysis	210308
Anton Irawan, Yazid Bindar, Teguh Kurniawan, Hafid Alwan, Rosid Rosid & Nisa Aina Fauziah	
Optimization and Modeling of Ammonia Removal from Aqueous Solutions by Using Adsorption on Single-walled Carbon Nanotubes	210309
Ghasem Hassani, Arsalan Jamshidi, Soheila Rezaei, Roohullah Jahanpour & Hossein Mari Oryad	
The Effect of Thermal Ageing on the Mechanical Properties of Natural Rubber-based Compounds Used for Rubber Bearings	210310
Manuel Alberto Guzmán, Diego Hernán Giraldo-Vásquez & Ricardo Moreno	
Comparison of Liquid Product Characteristics of PFAD Metal Soap Decarboxylation by Batch and Continuous Process	210311
Godlief F. Neonufa, Lidya Elizabeth, Endar Puspawiningtiyas, Meiti Pratiwi, Astri Nur Istyami, Ronny Purwadi & Tatang H. Soerawidjaja	
The Effect of Temperature on the Electrical Characteristics of Nanofluids Based on Palm Oil	210312
Pichai Muangpratoom	
Data Driven Building Electricity Consumption Model Using Support Vector Regression	210313
FX Nugroho Soelami, Putu Handre Kertha Utama, Irsyad Nashirul Haq, Justin Pradipta, Edi Leksono & Meditya Wasesa	

ISSN: 2337-5779



Other Journal published by ITB Journal Publisher:

Journal of Mathematical and Fundamental Sciences, Journal of ICT Research and Applications, Journal of Visual Art and Design

Journal of Engineering and Technological Sciences



Institute for Research and Community Services
Institut Teknologi Bandung



Indexed by



Journal of Engineering and Technological Sciences

Journal of Engineering and Technological Sciences welcomes full research articles in the area of Engineering Sciences from the following subject areas: Aerospace Engineering, Biotechnology, Chemical Engineering, Civil Engineering, Electrical Engineering, Engineering Physics, Environmental Engineering, Industrial Engineering, Information Engineering, Mechanical Engineering, Materials Science and Engineering, Manufacturing Processes, Microelectronics, Mining Engineering, Petroleum Engineering, and other application of physical, biological, chemical and mathematical sciences in engineering. Authors are invited to submit articles that have not been published previously and are not under consideration elsewhere.

Starting from Vol. 35, No. 1, 2003, full articles published are available online at <http://journals.itb.ac.id/index.php/jets>, and indexed by Scopus, Web of Science (Emerging Source Citation Index)-Clarivate Analysis, Ei Compendex, Google Scholar, Index Copernicus, DOAJ, ASEAN Citation Index, The Elektronische Zeitschriftenbibliothek EZB by University Library of Regensburg, EBSCO Open Science Directory, Chemical Abstract Service (CAS), Zurich Open Repository and Archive Journal Database, Indonesian Publication Index (IPI) and Science and Technology Index (SINTA),.

Publication History

Currently known as:

Journal of Engineering and Technological Sciences

Formerly known as:

- ITB Journal of Engineering Science (2007 - 2012)
- Proceedings ITB on Engineering Science (2003 - 2006)
- Proceedings ITB (1961 - 2002)

Editorial board of Journal of Engineering and Technological Sciences

Chief Editor

Tjandra Setiadi
Faculty of Industrial
Technology, ITB,
Indonesia

Suprijanto
Faculty of Industrial
Technology, ITB, Indonesia

Suwarno
School of Electrical
Engineering and
Informatics, ITB,
Indonesia

Jeong-Guon Ih
Korea Advanced
Institute of Science and
Technology, South
Korea

Editorial Board

Aiqin Wang
Center for Eco-material
and Green Chemistry,
Lanzhou Institute of
Chemical Physics,
Chinese Academy of
Sciences, P.R. China

Heri Andreas,
Faculty of Earth Science
and Technology, ITB,
Indonesia

Judha Purbolaksono
Faculty of Industrial
Technology Universitas
Pertamina, Indonesia

Tobias Nilsson
GFZ German Research
Centre for
Geosciences,
Potsdam, Germany

Mark van Loosdrecht
Faculty of Applied
Sciences, Delft
University of
Technology, The
Netherlands

M Akbar Rhamdhani
Department of
Mechanical and
Product Design
Engineering, Swinburne
University of Technology,
Australia

Satria Bijaksana,
Faculty Mining and
Petroleum Engineering,
ITB, Indonesia

Tatacipta Dirgantara
Faculty of Mechanical
and Aerospace
Engineering, ITB, Indonesia

Chien Ming Wang
School of Civil
Engineering, The
University of
Queensland, Australia

Masyhur Irsyam
Faculty of Civil and
Environmental
Engineering, ITB,
Indonesia

Indah Rachmatiah S.
Salami
Faculty of Civil and
Environmental
Engineering, ITB, Indonesia

Afriyanti Sumboja
Faculty of Mechanical
and Aerospace
Engineering, ITB,
Indonesia

Shuren Wang
School of Civil
Engineering, Henan
Polytechnic University,
China

Publication assistant: Yuliah Qotimah. Address: *ITB Journal Secretariat*, LPPM ITB, Center for Research and Community Services (CRCS) Building 7th Floor, Jl. Ganesha No. 10 Bandung 40132, Indonesia, Tel. +62-22-86010080, Fax.: +62-22-86010051; e-mail: jets@lppm.itb.ac.id.

Distribution: Distributed to other universities and research institutions for exchange publications, and to regular subscribers. Subscription per issue: Rp 100.000,- (domestic) and \$50 (overseas). Order form for subscription should be sent to the editorial office.

Reg. No. 691-SIC-UPPGT-SIT-1963, Accreditation No. 30/E/KPT/2018 (Vol. 50 No.1, 2018 - Vol. 54 No.6, 2022)

Published by The Institute for Research and Community Services, Institut Teknologi Bandung, in collaboration with Indonesian Engineering Association (Persatuan Insinyur Indonesia - PII).

Cover Design by Chandra Tresnadi.

Table of Contents

1. Seismic Behavior of Concrete-Filled Steel Tube (CFST) Column and Reinforced Concrete (RC) Beam Connections under Reversed Cyclic Loading	
Ahmed Najm Abdullah, Bambang Budiono, Herlien Dwiarti Setio & Erwin Lim	210301
2. The Method of Lines Analysis of TE Mode Propagation in Silica based Optical Directional Couplers	
Ary Syahriar, Putri Wulandari, Ahmad Husin Lubis, Retno Wigajatri, Danny M. Gandana & Anwar Mujadin	210302
3. Hydrogenated Palm Fatty Acid Distillate as Raw Materials for Magnesium Stearate Alternatives	
Abdu Ravi Zakaria, Dwi Rokhmat Setiawan, Shelly, Melia Laniwati & Dianika Lestari	210303
4. Numerical Simulation of Damage in Sandwich Composite Panels Due to Hydrodynamic Impact	
Satrio Wicaksono, Nur Ridhwan Muharram, Hermawan Judawisastra & Tatacipta Dirgantara	210304
5. Preparation of Graphene Oxide from Expanded Graphite at Different Microwave Heating Times	
Ahmed A Moosa, Zainab H. Mahdi & Mohammed A. Mutar	210305
6. Airflow Characteristics Investigation of a Diesel Engine for Different Helical Port Openings and Engine Speeds	
Willyanto Anggono, Mitsuhisa Ichiyanagi, Reina Saito, Gabriel J. Gotama, Chris Cornelius, Ryera Kreshna, Takashi Suzuki	210306
7. Identification of Micro-plastic Contamination in Drinking Water Treatment Plants in Phnom Penh, Cambodiar	
Sandhya Babel & Hakk Dork	210307

8. Bayah Natural Zeolites to Upgrade the Quality of Bio Crude Oil from Empty Fruit Bunch Pyrolysis
Anton Irawan, Yazid Bindar, Teguh Kurniawan, 210308
Hafid Alwan, Rosid Rosid & Nisa Aina Fauziah
9. Optimization and Modeling of Ammonia Removal from Aqueous Solutions by Using Adsorption on Single-walled Carbon Nanotubes
Ghasem Hassani, Arsalan Jamshidi, Soheila Rezaei, 210309
Roohullah Jahanpour & Hossein Mari Oryad
10. The Effect of Thermal Ageing on the Mechanical Properties of Natural Rubber-based Compounds Used for Rubber Bearings
Manuel Alberto Guzmán, Diego Hernán Giraldo-Vásquez 210310
& Ricardo Moreno
11. Comparison of Liquid Product Characteristics of PFAD Metal Soap Decarboxylation by Batch and Continuous Process
Godlief F. Neonufa, Lidya Elizabeth, 210311
Endar Puspawiningtiyas, Meiti Pratiwi, Astri Nur Istyami,
Ronny Purwadi & Tatang H. Soerawidjaja
12. The Effect of Temperature on the Electrical Characteristics of Nanofluids Based on Palm Oil
Pichai Muangpratoom 210312
13. Data Driven Building Electricity Consumption Model Using Support Vector Regression
FX Nugroho Soelami, Putu Handre Kertha Utama, 210313
Irsyad Nashirul Haq, Justin Pradipta, Edi Leksono &
Meditya Wasesa



The Method of Lines Analysis of TE Mode Propagation in Silica based Optical Directional Couplers

Ary Syahriar^{1,*}, Putri Wulandari¹, Ahmad Husin Lubis¹, Retno Wigajatri³,
Danny M. Gandana² & Anwar Mujadin¹

¹Electrical Engineering Department, University al Azhar Indonesia, Kompleks Masjid Agung, Jalan Sisingamangaraja Blok M, Jakarta Selatan 12110, Indonesia

²Agency for the Assessment and Application of Technology,
Jalan MH. Thamrin 8, Jakarta 10340, Indonesia

³Department of Electrical Engineering, University of Indonesia
Kampus Baru UI Depok 16424, Indonesia

*E-mail: ary@uai.ac.id

Highlights:

- The method of lines was applied to analyze the wavelength dependence characteristics of directional couplers.
- This forward semi numerical and analytical scheme was proven to be a versatile method to simulate simple optical directional couplers.
- To prevent mode back reflection propagating near the computational edge, a special absorbing boundary condition was applied to increase the calculation accuracy.
- The switching characteristics of optical directional couplers were analyzed to show the versatility of the method of lines.

Abstract. Optical directional couplers fabricated using planar light wave circuit (PLC) technology are versatile tools in integrated photonics devices. They have the advantages of small size, high consistency, ability for high volume production, and excellent possibility to be integrated with electronics circuits. Optical waveguide couplers are mainly utilized as power dividers, optical switches, and wavelength division multiplexers/de-multiplexers (WDM). A number of methods have been used to analyze directional couplers, such as coupled mode theory (CMT), the beam propagation method (BPM), the method of lines (MoL), finite-difference methods (FDM) and finite element methods (FEM). Among these numerical approaches, MoL is the simplest method to analyze mode propagation inside directional couplers because it has the advantages of very fast convergence and accurate solutions for one-dimensional structures. The objective of this study was to analyze the propagation of TE modes in optical directional couplers by using MoL. The parameters used, i.e. waveguide width, refractive index and wavelength, were taken from the characteristics of silica-on-silicon directional couplers that were used in fabrication. MoL is considered a special finite-difference method, which discretizes a one- or two-dimensional wave equation in the transverse direction and uses an analytical solution for the propagation directions. Basically, MoL is a semi analytical numerical method with the advantages of numerical stability, computational efficiency and calculation time

reduction. Further, we explored the possibility of using directional couplers as optical switching devices.

Keywords: *method of lines; absorbing boundary condition, optical directional couplers; optical switch; planar light wave circuits.*

1 Introduction

Optical directional couplers are versatile devices that play a pivotal role in the construction of advanced optical communication networks. They are widely used in a number of passive and active devices in fiber and integrated optics structures, including in modulators, switches, wavelength filters, ring resonators, interferometers, and wavelength division multiplexers/ demultiplexers [1-6]. They consist of two parallel waveguides that are put closely together with a separation distance small enough to let power transfer occur between two modes in two different waveguides through the evanescent field [7]. The light initially launches into the first waveguide. The presence of the second waveguide in close proximity to the first waveguide perturbs the mode inside the first waveguide. This perturbation creates a transfer, or coupling, of energy from the first to the second waveguide, as the light propagates in the z direction. The total power transfer may be obtained if both waveguides are identical [7-12].

So far, a number of effective numerical techniques have been suggested for the analysis of directional couplers. These include finite-difference methods (FDM), finite-element methods (FEM), the beam propagation method (BPM), and the method of lines (MoL). FDM is the oldest numerical method for solving partial differential equations. It is easy to program and to apply to non-homogenous refractive index profiles. This method subdivides the domain into many sub regions, in which the partial derivatives are replaced by finite-difference operators. The set of equations is then solved to obtain the eigenvalues. A drawback of FDM is that it offers less flexibility in the modeling of the domain since the sub regions are normally rectangular in shape. FEM can model intricate domain geometries, where the waveguide cross section is split into surface or volume elements and a polynomial is used to approximate the field in each element interface. Boundary conditions for field continuity are applied on all interfaces between the different elements. Various representations of Maxwell's equations are then employed to obtain an eigenvalue equation matrix form, which is then solved by common methods. This method requires a more complex programming structure and is more demanding in terms of both computer time and memory [13-16].

BPM has been used to analyze various two- and three-dimensional optical devices. The original BPM used a fast Fourier transfer (FFT) algorithm and

solved a paraxial scalar wave equation. The fundamental concept of BPM is to signify the field by the plane wave's superposition in homogenous media. The advantages of BPM are that it can be used on an arbitrary cross-section structure and that both guided and radiative waves are included in the analysis. However, since the formulation is derived with the assumption that the variation of the refractive index is negligible in the transverse direction, FFT-BPM cannot be used on structures with large index discontinuities [17-19].

To analyze a general waveguide structure, MoL has been proved to be a versatile tool because it has advantages in terms of convergence rate and the accuracy of the solution for one-dimensional structures. It is a special numerical method combined with an analytical method, where the wave equations are divided into a small area in the transverse direction. The analytical solution is employed in the propagation direction, which results in efficient computer calculation. An exact solution may be achieved because MoL behaves in a stationary way and convergence is monotonic. The discontinuity of the fields may be matched exactly since boundary conditions are inserted at the edges of the calculation window [16]. Additionally, as a numerical scheme MoL can easily be applied in computer calculations. In this study, MoL was used to analyze TE mode propagation in a simple optical directional coupler based on silica-on-silicon structures [16,20]. Further, we give an example of the directional coupler's application as an optical switching device.

2 Research Method

The approach used was to employ MoL to analyze silica waveguide based optical directional couplers that were fabricated using electron beam irradiation [26]. This fabrication method results in a weakly guiding structure, hence the refractive index differences between core and cladding are not very high. The basic data, i.e. waveguide width, waveguide separation, refractive index of core and cladding, were taken from real measurements of the power exchange in the silica based optical directional couplers.

2.1 The Method of Lines

To analyze the silica based directional coupler arrangement, we built an appropriate numerical model considering a coupler constructed by two parallel waveguides with constant thickness and gap, as shown in Figure 1. It was assumed that both guides were weakly guiding and single moded; the width and separation of the two guides were constant so that the amplitudes changed slowly with propagation distance. For the TE mode case, E_y is the only available electric field component. For the analysis we therefore started with the following scalar equation [20-22]:

The Method of Lines Analysis of TE Mode Propagation

$$\nabla^2 E_y(x, z) + k_o^2 n^2 E_y(x, z) = 0 \quad (1)$$

here n is the refractive index distribution forming the waveguide and k_o is the wave number, i.e. $2\pi/\lambda$, where λ is the optical wavelength. To solve Eq. (1) by using MoL, the structure to be analyzed is divided into small elements of Δx in the transverse x direction, as shown in Figure 1.

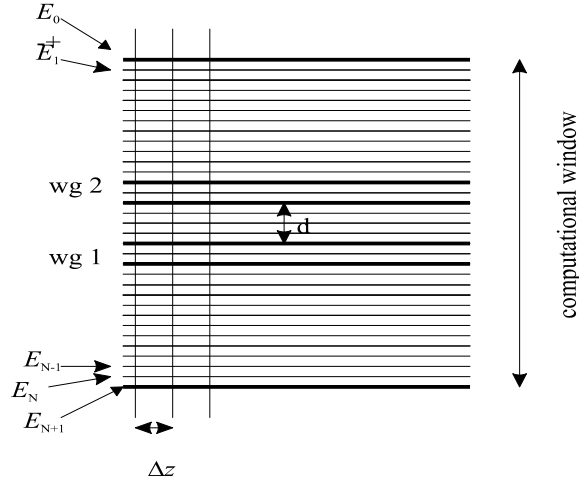


Figure 1 MoL discretization scheme used for the example of a directional coupler.

For the second derivative term, d^2E/dx^2 , the following approximation was used [14,16]:

$$\frac{d^2 E}{dx^2} \cong \frac{E_{i+1} - 2E_i + E_{i-1}}{\Delta x^2} \quad (2)$$

Then Eq. (1) decreases to a set of differential equation in matrix form:

$$\frac{d^2 \vec{E}}{dz^2} + \vec{Q}^2 \vec{E} = 0 \quad (3)$$

where $\vec{E} = [E_1, E_2, E_3, \dots, E_N]^T$ is a transpose column vector consisting of discretized quantities of the $E(x)$ field at points $x_1, x_2, \dots, x_N$. $\vec{Q}$ is a matrix consisting of diagonal elements $n_1^2, n_2^2, \dots, n_N^2$ representing the dielectric constant distribution of the waveguide at points $x_1, x_2, \dots, x_N$. In Eq. (3) there appears the tridiagonal structure of matrix $\vec{Q}$, which consists of three components that are

coupled with each other so a simple analytical solution cannot be achieved. Therefore, the $\bar{Q}$ matrix needs to be transformed so that:

$$\bar{\beta} = \bar{T} \bar{Q} \bar{T}^{-1} \quad (4)$$

and

$$\bar{E} = \bar{T}^{-1} \vec{E} \quad (5)$$

where $\bar{E}$ is the transformed field vector, $\bar{T}$ are the eigenvectors of matrix $\bar{Q}$ arranged in columns, and $\bar{\beta}$ are the eigenvalues of $\bar{Q}$ in diagonal matrix form. If this is done, the wave Eq. (3) can be written as a diagonalized equation of the form [21]:

$$\frac{d^2 \bar{E}}{dz^2} + \bar{\beta}^2 \bar{E} = 0 \quad (6)$$

If $\bar{\beta}$ is a constant matrix, i.e. if the structure is invariant in the z direction, a solution to Eq. (6) may be obtained in the following form [20-22]:

$$\bar{E} = e^{-j\bar{\beta}z} \bar{a} + e^{j\bar{\beta}z} \bar{b} \quad (7)$$

Here, the two terms describe forward and backward going waves, whose amplitudes are described by the vectors $\bar{a}$ and $\bar{b}$, respectively. If no back-reflected waves occur (such as in a straight lossless waveguide), Equation (7) may be written as:

$$\bar{E} = e^{-j\bar{\beta}z} \bar{a} \quad (8)$$

To obtain the field in the original domain, we use Eq. (5) to invert Eq. (8). For an input field $\vec{E}_{inp}$ the result is:

$$\vec{E} = \bar{T} e^{-j\bar{\beta}z} \bar{T}^{-1} \vec{E}_{inp} \quad (9)$$

Eq. (9) represents the solution for a mode transmitting in the $+z$ direction. Finally, the mode powers remaining in the optical core at a certain point z can be computed by using the overlap integral as [24]:

$$P(z) = \left| \int_{-\infty}^{\infty} E(x,0) E(x,z) dx \right|^2 \quad (10)$$

Here $E(x,0)$ and $E(x,z)$ are the initial and the output fields at point z respectively.

2.2 Boundary Condition

In computational calculations using a numerical method, the computational window needs to be restricted; therefore the field values near the boundaries have to be altered as if the computational window appears to extend infinitely. If there are no truncation conditions, the radiation fields will bounce back from the calculation border and enter the computational window, leading to a standing wave pattern that interferes with the final result. To overcome this, a slightly different absorbing boundary condition (ABC) is introduced [22,23]. The most common method of defining an ABC is based on the factorization of the wave equation. To begin with Eq. (1) is rewritten as:

$$LE = (D_z^2 + D_x^2 + k_0^2 n^2)E = 0 \quad (11)$$

where :

$$D_x^2 \equiv \frac{\partial^2}{\partial x^2}, \quad D_z^2 \equiv \frac{\partial^2}{\partial z^2}$$

The operator L is then divided into part L^+ and L^- as inbound and outbound mode respectively, as described in [22], so that:

$$LE = L^+ L^- E = 0 \quad (12)$$

Here the terms L^+ and L^- are given by :

$$L^\pm = D_x \pm j\sqrt{\varepsilon}\sqrt{1+S^2}, \text{ here } S^2 = \frac{D_z^2}{\varepsilon} \quad (13)$$

and:

$$\varepsilon = k_0^2 n^2$$

If we want to prevent wave reflection at both edges of the computational window, only outbound waves are allowed at that point. It can be shown that the field must then be described by [23]:

$$L^- E = 0 \quad (14)$$

for the mode propagating in the $-x$ direction, and

$$L^+ E = 0 \quad (15)$$

for the mode transmitting in the $+x$ direction. Suitable absorbing boundary conditions will be obtained from these two equations. However, the existence of

a radical in Eq. (13) prevents direct calculation of Eq. (12). Therefore, to implement ABC an approach to simplify the radical using algebraic approximation is needed. The radical may be approximated as [22,23]:

$$\sqrt{1+S^2} \approx p_0 + p_2 S^2 \quad (16)$$

where, the coefficients p_0 and p_2 need to be chosen according to the method of interpolation [23]. However, the values $p_0 = 1$ and $p_2 = 0.5$ are usually utilized. Eqs. (12), (13) and (16) are employed to find the field factors E_0 and E_{N+1} at the computational border of the discretized field at the computational edge in the upper and the lower sections, as shown in Figure 1. By using some algebraic operation it can be shown as follows [23]:

$$\begin{aligned} E_0 &= -a_u E_1 + b_u E_2 \\ E_{N+1} &= b_l E_{N-1} - a_l E_N \end{aligned} \quad (17)$$

where the coefficients a_p and b_p are given by:

$$\begin{aligned} a_p &= \frac{2+n_d^2}{1+jn_d}, \\ b_p &= -\frac{1-jn_d}{1+jn_d} \end{aligned} \quad (18)$$

with $n_d = \Delta x \varepsilon_p^{1/2}$ and $p = u, l$, where u and l represent the computational edges in the upper and lower sections, respectively.

2.3 Optical Switching Mechanism

One interesting application of optical directional couplers is as switching devices, which is a key component in optical communication systems. Currently, many switching technologies are available with very reliable operational mechanisms, such as electro-optic effects [1,2], thermo-optic (TO) effects [3,4], and mechanical means [6]. One reliable technology for optical switching waveguides is Ti-diffusion in LiNbO₃, where electro-optic effects are used. Today, switched directional couplers based on LiNbO₃ devices are commercially available. However, they are polarization sensitive and expensive, while the main benefit of such devices is that they can operate very fast, in the sub-nanosecond regime.

3 Numerical Results

The propagation of modes inside the coupling area is highly governed by the waveguide parameters, i.e. effective refractive index of waveguides structures,

wavelength and separation distance between the two cores. However, the condition where two waveguides are initially isolated will be disturbed by the presence of a second adjacent waveguide. If both waveguides are closely separated, then the evanescent field starts to transfer to the second waveguide, which leads to power exchange from waveguide core 1 to waveguide core 2.

The parameters used in the simulation are typical of silica-on-silicon slab waveguide devices and were taken from experiments. Following [20], we used a substrate refractive index of $n_s = 1.460$ and an index different of 5×10^{-3} . A core guide width of $h = 4.5 \mu\text{m}$ and a wavelength of $\lambda = 1.55 \mu\text{m}$ were also used. To implement the method, the eigenvalues and eigenvectors of matrix Q were first calculated numerically using Eq. (4). For the eigenvalues, the result was in the range of discretised values of β , as shown schematically in Figure 2. The single-mode guided propagation constant is then the maximum value of β , which lies between the values k_{on2} and k_{on1} .

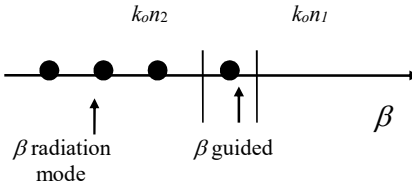


Figure 2 Discretized values of β obtained by the method of lines, including radiation propagation constants.

Figure 3 demonstrates the effective refractive index as a function of wavelength for a straight dielectric waveguide. The solid line signifies solutions of the eigenvalue equation, while the circle points were obtained from the MoL calculation. In this calculation, parameter values typical of the silica-on-silicon waveguide as mentioned above were used again. Both solutions had excellent similarity between the MoL numerical and the exact analytical results. This shows that the MoL theory can be used as an excellent tool to calculate planar waveguide geometry [4].

Figure 4 demonstrates the power transfer propagating between modes inside two waveguides along the coupling length directional coupler for three different refractive index values. It shows the power transfer between the modes in the two waveguides as an oscillatory function of propagation distance. As the refractive index difference increases, coupling occurs at longer length; this is because the modes are strongly confined inside the waveguides and the evanescent field inside the core tends to be very small, and therefore longer coupling lengths are needed to exchange power between the two waveguides.

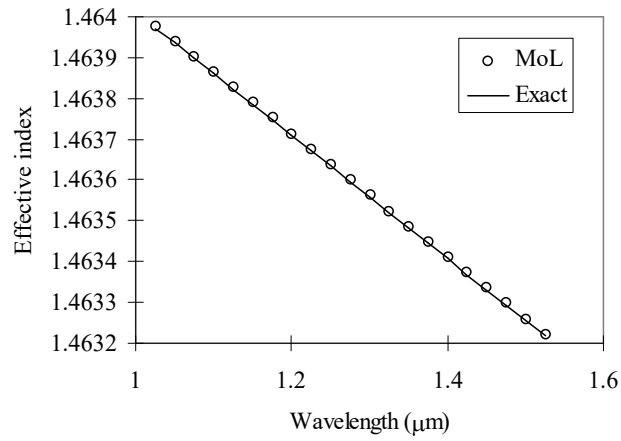


Figure 3 Effective index refraction of a planar waveguide computed by MoL and by solution of the analytical equation.

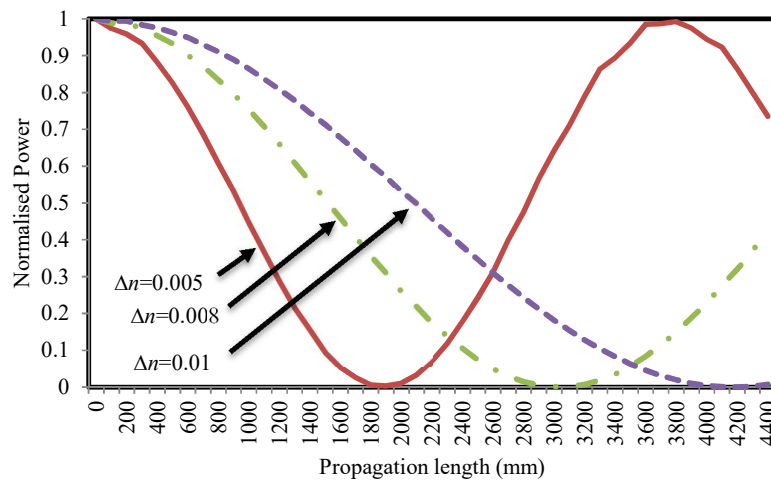


Figure 4 Power transfer as a function of propagation distance with different refractive index changes.

Figure 5 demonstrates the variation of normalized power with propagation distance for three different wavelengths; again, the output is transferred between the two guides in an oscillatory manner. The same as in Figure 4, as the wavelength becomes longer, the coupling length gets shorter. This is because for a longer wavelength the mode tends to spread further into the cladding, creating

larger evanescent fields and shorter coupling lengths. Similar power transfer characteristics can also be obtained by using CMT. A comparison of the power transfer results obtained using CMT and MoL was done in [8] with slightly different structures, however both theories agree very well.

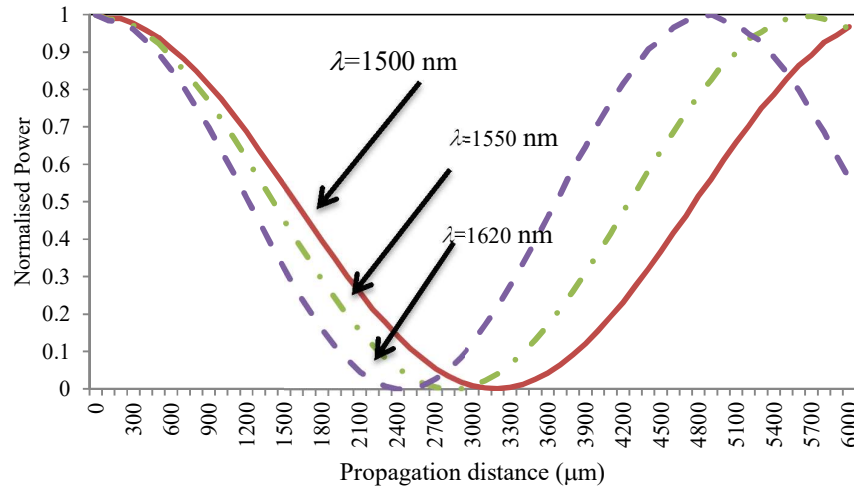


Figure 5 Power transfer as a function of propagation distance with different wavelengths.

Figure 6 demonstrates the power exchange along the propagation distance; power is plotted in a three-dimensional representation. In this case, different parameters were used, with a substrate refractive index of $n_s = 1.460$ and an index different of 1×10^{-2} . A core guide width of $h = 4.0 \mu\text{m}$ and a wavelength of $\lambda = 1.55 \mu\text{m}$ were also used. The input power was inserted into the left-hand waveguide and was gradually coupled into the right-hand guide. In this example, full power transfer was obtained after propagation over a distance of $8445 \mu\text{m}$.

An important application of a directional coupler is in optical switches. In this case, as shown in Figure 6, energy launched into one waveguide will totally transfer to the other guide. This condition is referred to as the coupled state. If by some means we can now introduce a finite difference between the two guides, the power will instead emerge from the first guide. This condition is referred to as the straight-through state. By varying the refractive index electrically we can switch the light energy from one waveguide to the other. This phenomenon is the basic principle behind the optical directional coupler switch [9-12].

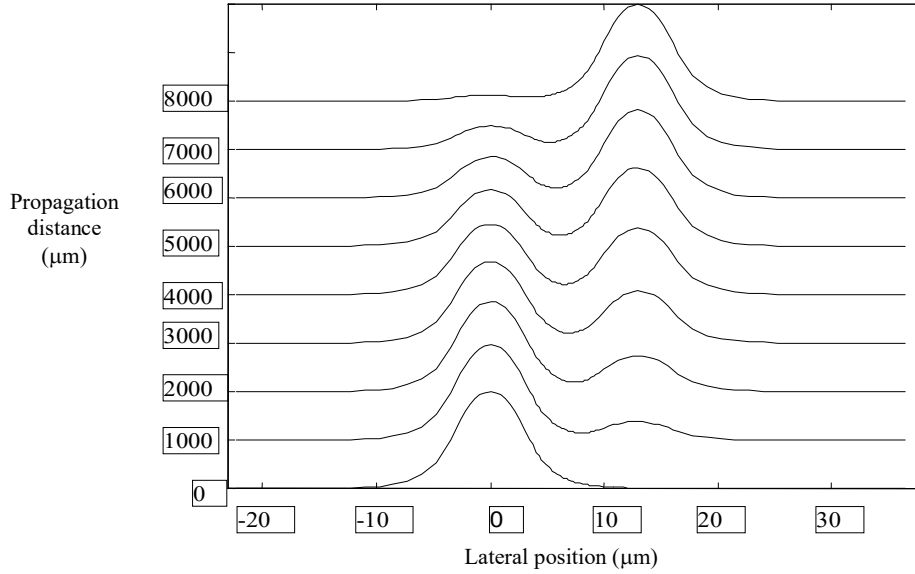


Figure 6 Power exchange of a planar waveguide directional coupler computed with MoL. The modal power launched into the left guide is seen to couple to the right guide.

We now consider the physical mechanisms that allow electrical operation of a switch. There are two common mechanisms, namely the electro-optic effect and the thermo-optic effect. The former refers to the modification of the material index of refraction caused by an electric field. The effect is strong in non-centro symmetric crystals such as LiNbO_3 . In case of a directional coupler switch, the index change is obtained by utilizing an electric field on the two guides via metal electrodes deposited above the waveguides so that the effective index of one guide increases while the other decreases [10,25]. As a result, light can be made to switch back and forth between the two guides. Two assumptions are made: first, the change in propagation constant of each guide is assumed to be directly proportional to the electric field, and second, any variation of coupling coefficient due to the electric field is assumed to be negligible.

On the other hand, directional couplers based on silica-on-silicon waveguides cannot easily be used as switching devices. Unlike the electro-optic effect (where the index changes directly proportional to the voltage), the refractive index changes in silica-on-silicon devices are caused by the thermo-optic effect induced by a thin film heater above the silica guide. The driving power and response time depend on the waveguide and the thermal conductivity of the materials. The main

problem is that it is almost impossible to heat one waveguide without affecting another nearby guide so that switching cannot be performed in a directional coupler geometry. One possible solution is to introduce a groove between the waveguides; however, this will attenuate or even eliminate the light to be switched. The usual method is to use another design, such as a Mach-Zehnder interferometer, as switching device [26,27].

4 Conclusion

In this study, we have demonstrated the use of a semi analytical numerical solution using the method of lines for optical directional couplers with different refractive index and wavelength variations. The examples demonstrated that MoL is an excellent semi analytical numerical method that can be applied to simulate optical waveguide devices with accurate calculation results. Unfortunately, a shortcoming of MoL lies in the fact that the computing time depends highly on the number of lines used and the computation time increases dramatically for wider and more complex structures. Additionally, for complex structures such as S-bend waveguides based on a sinusoidal function, the guide edge tends to approach the boundary of the computational window at both ends. Another possible solution is to use coordinate transformation or cascading curve waveguides to model the S bend structures so that the computational window and hence the matrix size can be minimized to decrease the computational time.

References

- [1] Kumar, S. & Deen, M.J., *Fiber Optic Communications, Fundamental and Applications*, J. Wiley, Chichester, West Sussex, PO19 8SQ, United Kingdom 2014.
- [2] Chrostowski, L. & Hochberg, M., *Silicon Photonics Design*, Cambridge University Press, Cambridge CB2 8BS, United Kingdom, 2015.
- [3] Yariv, A. & Yeh, P., *Photonics*, Optical Electronics in Modern Communications' Oxford University Press, New York, 2017.
- [4] Liu, J.M., *Photonic Devices*, Cambridge University Press, New York 2005.
- [5] Rogers, A., *Essentials of Photonics*, CRC Press, Boca Raton, FL 33487-2742, 2008.
- [6] Al-Azzawi, A., *Advanced Manufacturing for Optical Fibers and Integrated Photonic Devices*, CRC Press, Boca Raton, FL 33487-2742, 2016.
- [7] Shitrit, N., Shteeman, V. & Hardy, A.A., *Reformulation of Coupled-Mode Theory of Parallel Waveguides for Analysis of Arbitrary Beams*, 2018 IEEE International Conference on the Science of Electrical Engineering in Israel (ICSEE), 2018.

- [8] Syahriar, A., Adam, H., Astharini, D., Lubis, A.H., Gandana, D.M., *Analysis of Three Paralel Waveguides Using Coupled Mode Theory and the Method of Lines*, International Seminar on Application for Technology of Information and Communication (ISemantic), 2016.
- [9] Wei, J.S., *Power Transfer in a Large Parallel Array of Coupled Dielectric Waveguides*, IEEE Transactions on Microwave Theory and Techniques, **55**, pp. 2345-2353, 2007.
- [10] Kaplan, A. & Ruschin, S., *Optical Switching and Power Control in LiNbO3 Coupled Waveguide Arrays*, IEEE J. Quantum Electron., **37**, pp. 1562-1573, 2001.
- [11] Hardy, A. & Streifer, W., *Coupled Mode Theory of Parallel Waveguides*, J. Lightwave. Technol., **LT-3**, pp. 1135-1146, 1985.
- [12] Haus, H.A., Huang, W.P., Kawakami, S. & Whitaker, N.A., *Coupled-Mode Theory of Optical Waveguides*, J. Lightwave. Technol., **LT-5**, pp. 16-23, 1987.
- [13] Saad, S.M., *Review of Numerical Methods for the Analysis of Arbitrarily Shaped Microwave and Optical Dielectric Waveguides*, IEEE Trans. on Microwave Theory and Tech., **MTT-33**, pp. 894-899, 1985.
- [14] Itoh, T., *Numerical Techniques for Microwave and Millimeter-Wave Passive Structures*, John Wiley & Sons, New York 1989.
- [15] Rogge, U. & Pregla, R., *Method of Lines for the Analysis of Dielectric Waveguides*, IEEE J.Lightwave Technol., **LT-11**, pp. 2015-2020, 1993.
- [16] Taflove, A., (Editor), Oskooi, A. & Johnson, S.G., (Coeditors), *Advances in FDTD Computational Electrodynamics Photonics and Nanotechnology*, Artech House, 2013. Boston USA
- [17] Hayashi, K., Koshiha, M., Tsuji, Y., Yoneta, S., Kaji, R., *Combination of Beam Propagation Method and Mode Expansion Propagation Method for Bidirectional Optical Beam Propagation Analysis*, IEEE J.Lightwave Technol., **LT-16**, pp. 2040 - 2045, 1998.
- [18] Lopez-Dona, J.M., Wanguemert-Perez, J.G. & Molina-Fernandez, I., *Fast-Fourier-based Three-Dimensional Full-Vectorial Beam Propagation Method*, IEEE Photon. Tech. Lett., **17**, pp. 2319 - 2321, 2005.
- [19] Wangüemert-Pérez, J.G., Molina-Fernández (Molina-Fernandez), I. & Nieto, M.A.L., *A Novel Fourier Based 3D Full-Vectorial Beam Propagation Method*, Opt. Quantum Electron., **36**, pp. 285-301, 2004.
- [20] Syahriar, A., Schneider, V.M. & Al-Bader, S., *The Mode Evolution Couplers*, IEEE J. Lightwave Technol., **LT-16**, pp. 1907-1914, 1998.
- [21] Jamid, H.A. & Al-Bader, S.J., *Diffraction of Surface Plasmon-polaritons in an Abruptly Terminated Dielectric-metal Interface*, IEEE. Photon. Tech. Lett., **7**, pp. 321-323, 1995.
- [22] Dreher, A. & Pregla, R., *Analysis of Planar Waveguides with the Method of Lines and Absorbing Boundary Conditions*, IEEE Microwave Guided Wave Lett., **1**, pp. 130-140, 1991.

- [23] Moore, T.G., Blaschak, J.G., Taflove, A. & Kriegsmann, G.A., *Theory and Application of Radiation Boundary Operators*, IEEE Trans. Antenna and Prop., **36**, pp. 1797-1812, 1988.
- [24] Lee, D.L., *Electromagnetic Principles of Integrated Optics*, John Wiley & sons, New York, 1986.
- [25] Papuchon, M., Combemale, Y., Mathieu, X., Ostrowsky, D.B., Reiber, L., Roy, A.M., Sejourne, B. & Werner, M., *Electrically Switched Optical Directional Coupler: Cobra*, Appl. Phys. Lett., **27**, pp. 289-291, 1975.
- [26] Syahriar, A., Syms, R.R.A. & Tate, T.J., *Thermooptic Interferometric Switches Fabricated by Electron Beam Irradiation of Silica-on-Silicon*, IEEE J. Lightwave Technol., **LT-16**, pp. 841-846, 1998.
- [27] Agifral, D., Syahriar, A., Lubis, A.H. & Rahardjo, S., *Simulation of Optical Switching Based on Mach-Zender Interferometer Structure*, 2010 The 2nd International Conference on Computer and Automation Engineering (ICCAE), 2010.

From: "Ary Syahriar" <ary@uai.ac.id>
To: "jets" <jets@lppm.itb.ac.id>
Cc: "itbjournal" <itbjournal@gmail.com>
Sent: Wednesday, May 19, 2021 3:44:26 PM
Subject: Re: 14190 [jets] Copyediting Review Request from Journal of Engineering and Technological Sciences

Dear Prof.Dr. Tjandra Setiadi
Journal of Engineering and Technological Sciences
Institut Teknologi Bandung

I am totally agree with the language and tenses improvement of the paper. Therefore I have accepted all the change suggested by the editors. Attached is the last review that I had made and changed accordingly. Thank you very much for your cooperation.

Best Regard,
Ary Syahriar

From: "jets" <jets@lppm.itb.ac.id>
To: ary@uai.ac.id
Cc: "itbjournal" <itbjournal@gmail.com>
Sent: Wednesday, May 19, 2021 11:05:43 AM
Subject: 14190 [jets] Copyediting Review Request from Journal of Engineering and Technological Sciences

Dear Ary - Syahriar,

Your submission " The Method of Lines Analysis of Silica based Optical Directional Couplers" for Journal of Engineering and Technological Sciences has been through the first step of copyediting, and is available for you to review by following these steps.

1. Log into the journal and click on the Copyedited File that appears below.
2. Open the downloaded submission.
3. Review the text, including copyediting proposals and Author Queries.
4. Make any copyediting changes that would further improve the text.
5. When completed, upload the file in your reply,
6. Send the COMPLETE email to the editor and copyeditor.

This is the last opportunity to make substantial copyediting changes to the submission. The proofreading stage has followed the preparation of the galleys, therefore it is restricted to correcting typographical and layout errors.

We should be grateful if you are able to complete the copyediting review by 21 May 2021. If you are unable to undertake this work at this time or have any questions, please contact me. Thank you for your contribution to this journal.

With kind regards,

Prof.Dr. Tjandra Setiadi
Journal of Engineering and Technological Sciences
Institut Teknologi Bandung
jets@lppm.itb.ac.id

From: journal@office.itb.ac.id
To: "Dr Ary - Syahriar" <ary@uai.ac.id>
Sent: Wednesday, May 19, 2021 11:03:44 AM
Subject: [jets] New notification from Journal of Engineering and Technological Sciences

You have a new notification from Journal of Engineering and Technological Sciences:

You have been added to a discussion titled "[jets] Copyediting Review Request from Journal of Engineering and Technological Sciences" regarding the submission "The Method of Lines Analysis of Silica based Optical Directional Couplers".

Link: <http://journals.itb.ac.id/index.php/jets/authorDashboard/submission/14190>

Prof.Dr. Tjandra Setiadi

From: "jets" <jets@lppm.itb.ac.id>
To: "ary" <ary@uai.ac.id>
Cc: "itbjournal" <itbjournal@gmail.com>
Sent: Wednesday, April 14, 2021 1:53:34 PM
Subject: 14190 [jets] Request for Paper Revision after editing

Dear Authors,

We have set your paper to our template and checked some parts. We should be grateful if you are able to complete our request about some parts of your paper. Please send your revision by **19 April 2021**. Thank you for your support and cooperation.

Kind regards,
Journal of Engineering and Technological Sciences

From: "Ary Syahriar" <ary@uai.ac.id>
To: "jets" <jets@lppm.itb.ac.id>
Cc: "Putri Wulandari" <putri.wulandari@uai.ac.id>, "Ahmad Lubis" <ahlubis@uai.ac.id>, "Danny Gandana" <dgandana@yahoo.com>, "Anwar Mujadin" <amujadin@uai.ac.id>
Sent: Sunday, March 21, 2021 9:20:16 AM
Subject: Receipt of JETS for publication fee

Dear Sir/Madam,

Please find attached is the Receipt of JETS for publication fee for:

Manuscript ID: 14190

Title: "The Method of Lines Analysis of TE Mode Propagation in Silica based Optical Directional Couplers"

Authors: Ary - Syahriar, Putri Wulandari, Ahmad Husin Lubis, Retno Wigajatri, Danny M Gandana, Anwar Mujadin

Thank you for your cooperation,

Best Regard,

Ary Syahriar

--

Ary Syahriar

Wakil Rektor IV

Universitas Al Azhar Indonesia

Komplek Masjid Agung Al Azhar Kebayoran Baru - Jakarta Selatan 12110

[\(021\) 727 92753](tel:021-727-92753)

From: "jets" <jets@lppm.itb.ac.id>

To: "ary" <ary@uai.ac.id>

Cc: "itbjournal" <itbjournal@gmail.com>

Sent: Monday, March 15, 2021 4:33:36 PM

Subject: 14190[jets] Editor Decision from Journal of Engineering and Technological Sciences

Dear Ary - Syahriar,

We are pleased to inform you that the following paper has been officially accepted for publication in Journal of Engineering and Technological Sciences, Volume 53, Issue No. 3, Year 2021:

Manuscript ID: 14190

Title: "The Method of Lines Analysis of Silica based Optical Directional Couplers"

Authors: Ary - Syahriar

Received: 15 March 2021

We will now make the final preparations for publication, then return the manuscript to you for your approval. It may take sometimes, due to the overwhelming task in our side. To complete the publication process, please sign the assignment of copyright transfer by all authors and send the signed copyright transfer form by 22 March 2021

If, however, extensive English edits are required to your manuscript, we will need to

return the paper requesting improvements throughout.

In the meantime, please make the payment for publication fee for US \$150 can be completed through Bank Transfer. Please also provide Tax ID and your address in your Tax ID.

For payment using bank account please transfer to:

Name of Recipient: LPPM Publication Fee ITB Jurnal

Address of Recipient: Jl. Tamansari No. 64 Bandung

Bank Name: BANK NEGARA INDONESIA "PT (PERSERO)

Bank Account Number: [988-00411-06000002](#)

Swift Code: BNINIDJAXXX

Bank Address: Jl. Tamansari No. 80 Bandung, Indonesia

If you have done the payment, please send us the proof of payment to email jets@lppm.itb.ac.id.

Many thanks for submitting your fine paper to Journal of Engineering and Technological Sciences. We look forward to receiving additional papers from you in the future.

With kind regards,

Prof.Dr. Tjandra Setiadi

From: "jets" <jets@lppm.itb.ac.id>

To: ary@uai.ac.id

Cc: "itbjournal" <itbjournal@gmail.com>

Sent: Tuesday, November 3, 2020 8:10:09 PM

Subject: 14190[jets] Editor Decision from Journal of Engineering and Technological Sciences

Dear Dr Ary - Syahriar,

We have reached a decision regarding your submission to Journal of Engineering and Technological Sciences, "The Method of Lines Analysis of Silica based Optical Directional Couplers".

Our decision is: Revision Required.

If you are able to correct the paper taking into account all of the points raised in the referees' report, I would be willing to arrange for the paper to be reviewed again. Revisions should be submitted within 14 days.

Besides the referees' report as attached in this email, see also the "Reviewer Uploaded Files" in journal's website to read the additional comments from reviewers (if any).

If you choose to revise your manuscript it will be due into the Editorial Office by 17 November 2020.

Revised article should be submitted on ITB Journal's online system under Review Tab, click on "Upload Author Version".

Submission URL: <http://journals.itb.ac.id/index.php/jets>

If you does not know or forget your username and password for the journal's web site, you can use this link to reset your password (which will then be emailed to you along with your username). <http://journals.itb.ac.id/index.php/jets/login/lostPassword>

When submitting your revised paper, please include a separate document that carefully addresses the issues raised in the reviewer comments, point by point. You should also include a suitable rebuttal to any specific request for change that has not been made. To assist the review process, it is essential that all corrections made to the text (in response to both the Editor's and the reviewer's comments) are highlighted in red type.

To upload your revision's comments and other additional files (if any), click on "Add a Supplementary File" under Summary tab.

Thank you, and we look forward to receiving your revised manuscript.

With kind regards,

Prof.Dr. Tjandra Setiadi
Journal of Engineering and Technological Sciences
Institut Teknologi Bandung
jets@lppm.itb.ac.id

Reviewer A:

Comments to Author:: see attachment

Reviewer B:

Is the paper content original?:
Yes

Does the paper title represent its content?:

Yes

Does the abstract reflect the paper content?:

Yes

Do the keywords indicate the scope of the research?:

Yes

Is the research methodology or the approach of the problem solving clearly described?:

See Comment

Do the data presentation and interpretation valid and reasonable?:

Yes

Do the use of tables and figures help to clarify the explanation?:

Yes

Have the discussion and/or analysis been relevant with the results of the study?:

See Comment

Are the references used relevant?:

Yes

Contribution to science::

Fair

Originality:

Good

Systematic::

Good

Language::

Good

Writing Accuracy::

Good

Comments to Author::

The explanation on the parameters being used for measurement in the abstract should be defined after the objective and not before it. Please rewrite the sentence of "In this research we used the method of lines to analyze propagation of TE mode in optical directional couplers". It should be written as "The objective of this study is....". The methods or methodology could be improved by simply indicating the approach use

for data collection. It is understood that the Method of Lines with boundary conditions is used to achieve the objective of this study. Hence, I suggest that before (2.1), a general statement indicating the approach in conducting this study (method use for collecting data) should be stated. The explanation given in (2.1) and (2.2) are details of the methods which are acceptable. In addition, the authors should indicate, maybe as section (2.3) – the optical switching demonstration and application using the MoL approach as part of the methodology. This method (data collection/analysis) on the optical switching should be indicated before the actual data are presented in the result, section (3). On the data presentation & analysis, it is acceptable not to compare the data obtained from MoL and with other techniques including CMT, FEM etc. Nevertheless, the authors could provide indications on how much close the data such as in Figure 4 – 6 obtained using MoL compare to the others. For example in Figure 3, comparison of data obtained by MoL and others can be made. Data on this curve for other techniques for sure have been presented before in many literatures.

From: "jets" <jets@lppm.itb.ac.id>
To: ary@uai.ac.id
Cc: "itbjournal" <itbjournal@gmail.com>
Sent: Friday, September 25, 2020 9:57:53 PM
Subject: 14190 [jets] The Method of Lines Analysis of Silica based Optical Directional Couplers

Dear Author,
We should be grateful if you are able to complete your revision with author respond by 1 October 2020.
Thank you for your support and cooperation.

Kind regards,
JETS

From: "jets" <jets@lppm.itb.ac.id>
To: ary@uai.ac.id
Cc: "itbjournal" <itbjournal@gmail.com>
Sent: Monday, July 13, 2020 10:09:45 PM
Subject: 14190 [jets] The Method of Lines Analysis of Silica based Optical Directional Couplers

Dear Authors,

We found your paper has similarity with your conference publication. It is recommended to paraphrase similar sentences. We also recommend you to ensure you have followed our template of publication. Please send your revised paper by 20 July 2020.
Thank you.

Kind regards,
JETS

----- Forwarded Message -----

From: "jets" <jets@lppm.itb.ac.id>

To: "Dr Ary - Syahriar" <ary@uai.ac.id>

Sent: Wednesday, July 8, 2020 10:56:01 AM

Subject: [jets] Submission Acknowledgement from Journal of Engineering and Technological Sciences

Dear Dr Ary - Syahriar,

This is to confirm that the manuscript, "The Method of Lines Analysis of Silica based Optical Directional Couplers", has been received for consideration in the Journal of Engineering and Technological Sciences.

You will be able to check on the progress of your manuscript by logging on to the ITB Journal Online System: <http://journals.itb.ac.id/index.php/jets>

Manuscript URL:

<http://journals.itb.ac.id/index.php/jets/author/submission/14190>

Username: arysyahriar

If you forget the password for the journal's web site, you can use this link to reset your password (which will then be emailed to you along with your username): <http://journals.itb.ac.id/index.php/jets/login/lostPassword>

For your information, author whose paper is accepted for publication in Journal of Engineering and Technological Sciences is subjected to pay 150 USD per article up to 15 pages.

Your article will be checked for plagiarism first before it will be reviewed by peer reviewers. Please recommend at least two referees candidate for your article who do not have any research cooperation with authors within the last three years (please provide names, institution and email address). The Journal will consider carefully any recommended exclusions, but will not always follow the reviewer recommendations.

Thank you for submitting your manuscript to the Journal of Journal of

Engineering and Technological Sciences. Should you have any questions, please feel free to contact our office.

With kind regards,

Prof.Dr. Tjandra Setiadi
Journal of Engineering and Technological Sciences

Journal of Engineering and Technological Sciences
<http://journals.itb.ac.id/index.php/jets>